


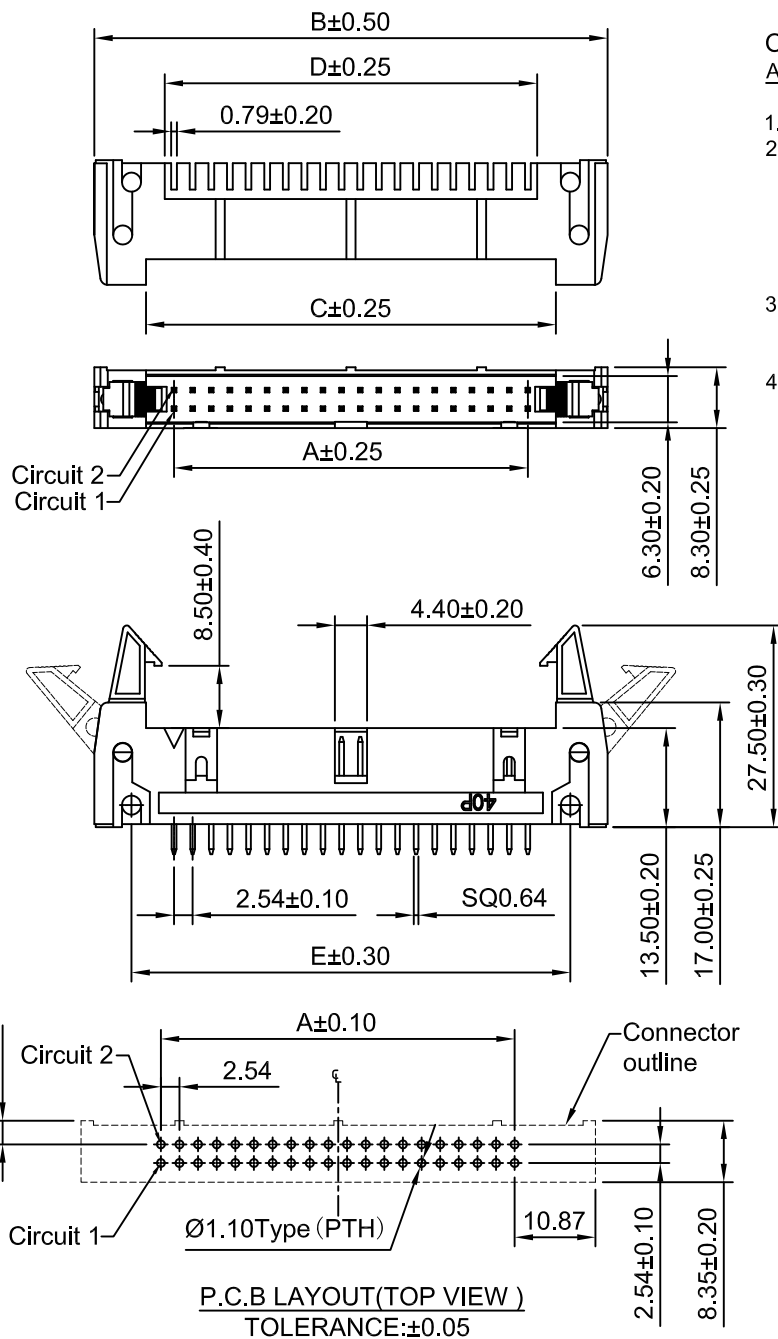

Ordering Information:

A2547WV-2xXP-A - ** - *** - **
1 2 3 4

1.Part NO.

2.Material:

(Blank): PBT,UL94V-0

6T:Nylon 6T,UL94V-0

GWT:Nylon 6T,UL94V-0,
IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank):Black

GY:Gray

4.Finish:

(Blank):Gold over Nickel(1u")

G15:Gold over Nickel(15u")

G30:Gold over Nickel(30u")

T: Tin over Nickel

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Gold over Nickel

Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions (mm)				
	A	B	C	D	E
2x3P	5.08	26.82	12.74	7.62	16.68
2x4P	7.62	29.36	15.28	10.16	19.22
2x5P	10.16	31.90	17.82	12.70	21.76
2x6P	12.70	34.44	20.36	15.24	24.30
2x7P	15.24	36.98	22.90	17.78	26.84
2x8P	17.78	39.52	25.44	20.32	29.38
2x9P	20.32	42.06	27.98	22.86	31.92
2x10P	22.86	44.60	30.52	25.40	34.46
2x12P	27.94	49.68	35.60	30.48	39.54
2x13P	30.48	52.22	38.14	33.02	42.08
2x15P	35.56	57.30	43.22	38.10	47.16
2x17P	40.64	62.38	48.30	43.18	52.24
2x20P	48.26	70.00	55.92	50.80	59.86
2x25P	60.96	82.70	68.62	63.50	72.56
2x30P	73.66	95.40	81.32	76.20	85.26
2x32P	78.74	100.48	86.40	81.28	90.34

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 2.54MM PITCH 180° BOX HEADER	
mm	1:5:1	1 of 1		
DRWN	CHK'D	APPR		
Haisen Li	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2547WV-2xXP-A	REV A0
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°				
				

x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°

