
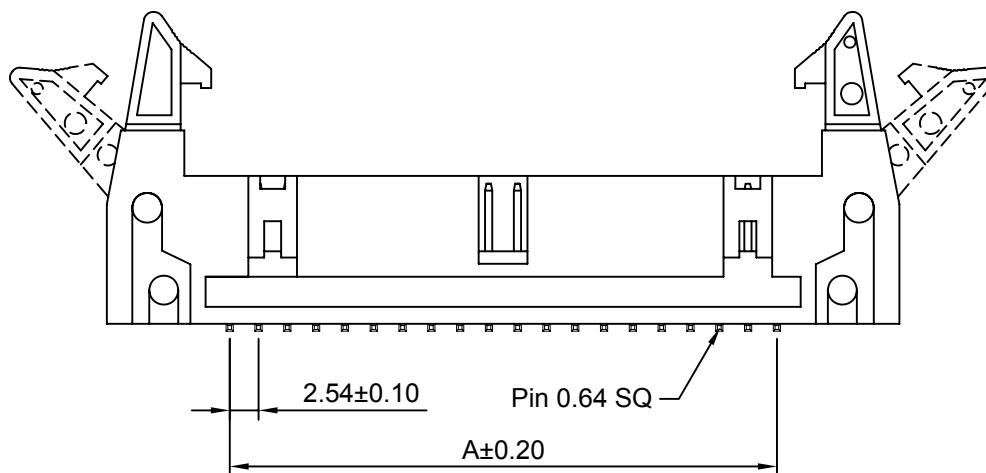
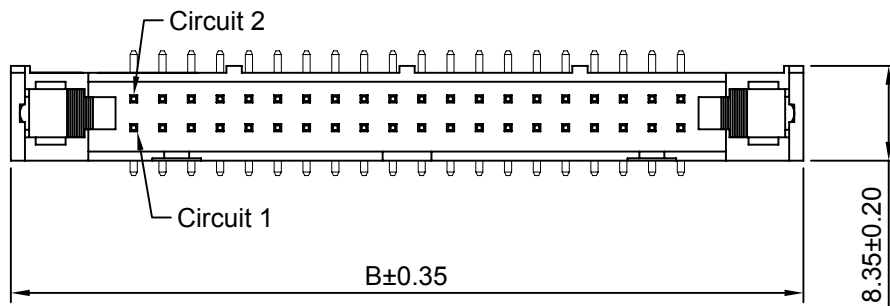


P.C.B LAYOUT

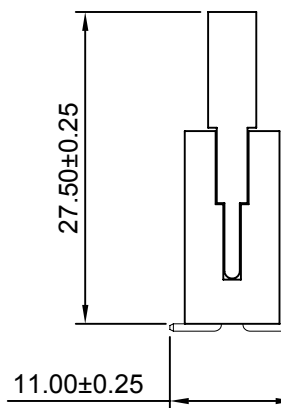

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Gold over Nickel
Material: Nylon6T,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x3P	5.08	26.92	2x18P	43.18	65.02
2x4P	7.62	29.46	2x19P	45.72	67.56
2x5P	10.16	32.00	2x20P	48.26	70.10
2x6P	12.70	34.54	2x21P	50.80	72.64
2x7P	15.24	37.08	2x22P	53.34	75.18
2x8P	17.78	39.62	2x23P	55.88	77.72
2x9P	20.32	42.16	2x24P	58.42	80.26
2x10P	22.86	44.70	2x25P	60.96	82.80
2x11P	25.40	47.24	2x26P	63.50	85.34
2x12P	27.94	49.78	2x27P	66.04	87.88
2x13P	30.48	52.32	2x28P	68.58	90.42
2x14P	33.02	54.86	2x29P	71.12	92.96
2x15P	35.56	57.40	2x30P	73.66	95.50
2x16P	38.10	59.94	2x31P	76.20	98.04
2x17P	40.64	62.48	2x32P	78.74	100.58

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		Title : 2.54mm Pitch 180° BOX HEADER -SMT TYPE		
mm		1.5:1		1 of 1				
Draw BY:			Approved :			DRAW NO : A2547WV-S-2xXP		
Jack Yin			GONGYB					
General Tolerance					ANGLE± 			
1 x.xs≤0.25 x.xx≤0.20 x.xxx≤0.15								
REV A0								

x.x≤0.25
x.xx≤0.20
x.xxx≤0.15

ANGLE±