

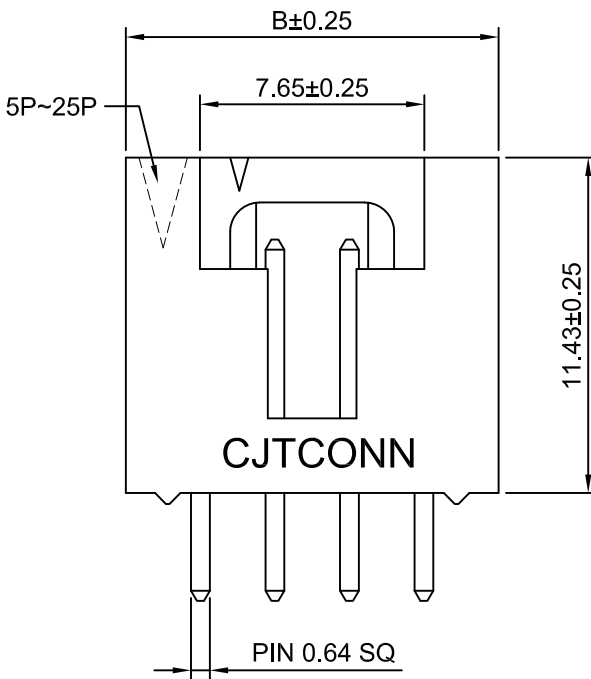
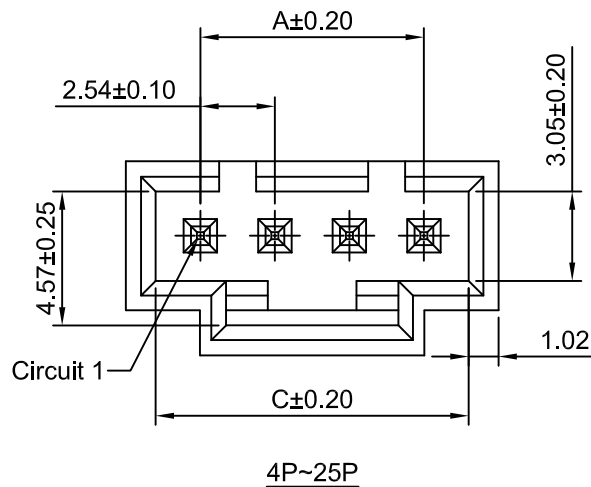
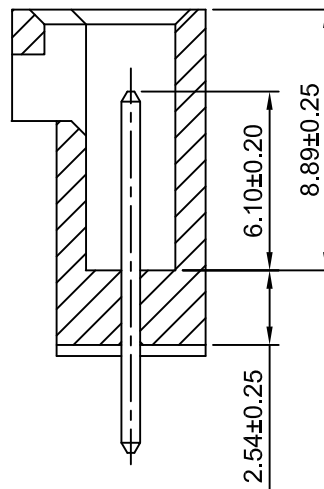


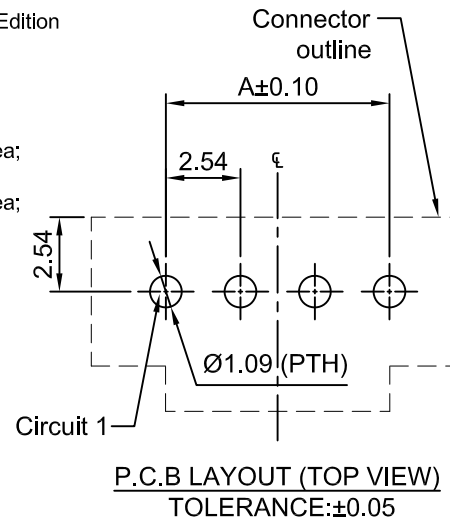

Ordering Information:
A2547WV-XP - *** - *** - ***
1 2 3 4

- Part NO.
- Material:
(Blank): PBT,UL94V-0
GWT: Nylon 66,UL94V-0,IEC 60335-1,5th Edition
Glow Wire Capable.
LCP: LCP,UL94V-0
- Finish:
(Blank): Gold over Nickel (Au:1u")
G15: Gold over Nickel (Au:15u",Mating Area;
Sn:80u" Min.,Nickel:30u" Min.)
G30: Gold over Nickel (Au:30u",Mating Area;
Sn:80u" Min.,Nickel:30u" Min.)
T: Tin over Nickel
- Size D:
(Blank): 3.30mm
D25: 2.54mm
D38: 3.81mm

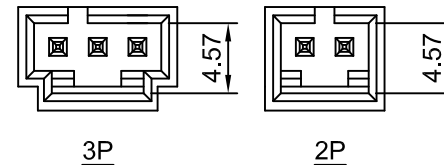

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Gold over Nickel
Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2547WV-2P	2.54	7.63	5.59
A2547WV-3P	5.08	10.17	8.13
A2547WV-4P	7.62	12.71	10.67
A2547WV-5P	10.16	15.25	13.21
A2547WV-6P	12.70	17.79	15.75
A2547WV-7P	15.24	20.33	18.29
A2547WV-8P	17.78	22.87	20.83
A2547WV-9P	20.32	25.41	23.37
A2547WV-10P	22.86	27.95	25.91
A2547WV-11P	25.40	30.49	28.45
A2547WV-12P	27.94	33.03	30.99
A2547WV-13P	30.48	35.57	33.53
A2547WV-14P	33.02	38.11	36.07
A2547WV-15P	35.56	40.65	38.61
A2547WV-16P	38.10	43.19	41.15
A2547WV-17P	40.64	45.73	43.69
A2547WV-18P	43.18	48.27	46.23
A2547WV-19P	45.72	50.81	48.77
A2547WV-20P	48.26	53.35	51.31
A2547WV-21P	50.80	55.89	53.85
A2547WV-22P	53.34	58.43	56.39
A2547WV-23P	55.88	60.97	58.93
A2547WV-24P	58.42	63.51	61.47
A2547WV-25P	60.96	66.05	64.01

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	4:1	1 of 1	2.54mm PITCH 180° WAFER		
DRWN	CHK'D	APPR			
Dengchun Yi	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO. A2547WV-XP	
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°					
				REV A3	