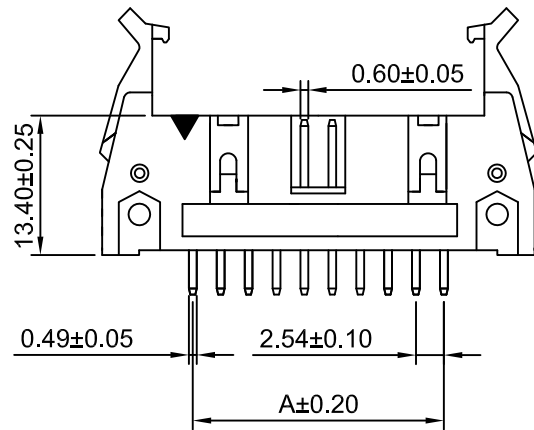
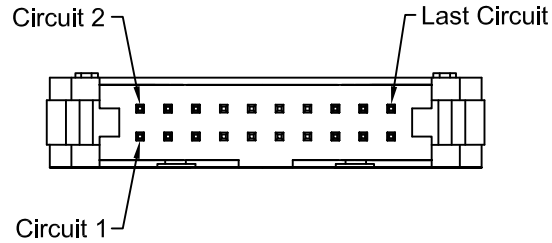


Ordering Information:

A2547WVC-2xXP - ** - ***
1 2 3

1.Part No.

2.Material:

(Blank):PBT,UL94V-0

6T:Nylon 6T,UL94V-0

GWT: Nylon 66,UL94V-0,
IEC 60335-1,5th Edition
Glow Wire Capable.

3.Finish:

(Blank):Gold over Nickel

T:Tin over Nickel

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Gold over Nickel

Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x5P	10.16	31.90	2x19P	45.72	67.46
2x6P	12.70	34.44	2x20P	48.26	70.00
2x7P	15.24	36.98	2x21P	50.80	72.54
2x8P	17.78	39.52	2x22P	53.34	75.08
2x9P	20.32	42.06	2x23P	55.88	77.62
2x10P	22.86	44.50	2x24P	58.42	80.16
2x11P	25.40	47.14	2x25P	60.96	82.70
2x12P	27.94	49.68	2x26P	63.50	85.24
2x13P	30.48	52.22	2x27P	66.04	87.78
2x14P	33.02	54.76	2x28P	68.58	90.32
2x15P	35.56	57.30	2x29P	71.12	92.86
2x16P	38.10	59.84	2x30P	73.66	95.40
2x17P	40.64	62.38	2x31P	76.20	97.94
2x18P	43.18	64.92	2x32P	78.74	100.48

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		1.5:1		1 of 1			
DRAWN		CHK'D		APPR		2.54mm Pitch Vertical Box Header	
Chengbiao Ye		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO. A2547WVC-2xXP	
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°							
6						REV A1	
1							