
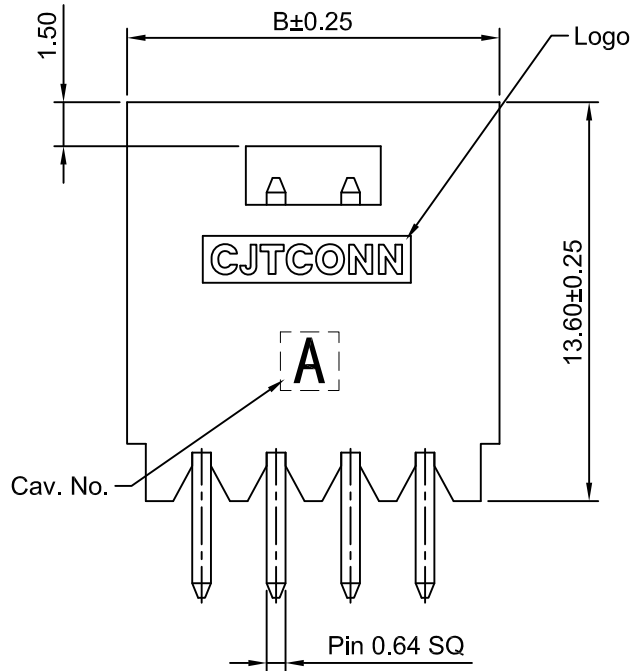
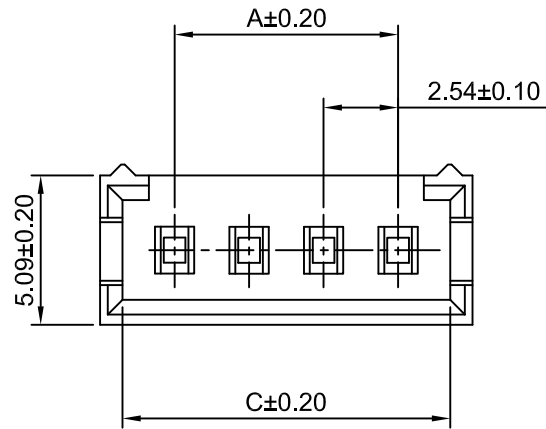
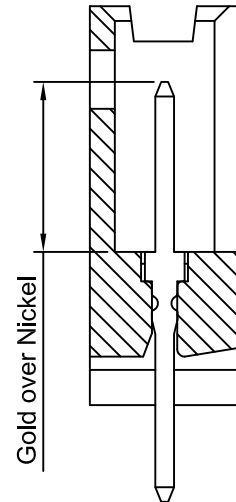


P.C.B LAYOUT
TOLERANCE:±0.05

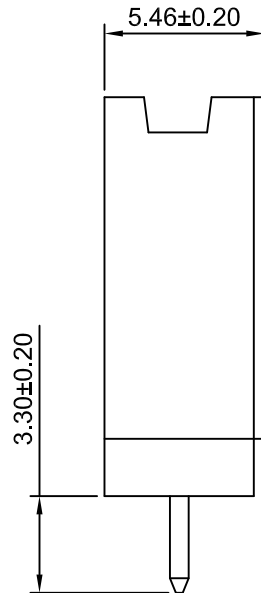

Odering Information:
A2547WVE-XP - $\frac{G^{**}}{2}$

1.Part No.

2.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel (Au:1µin[0.025],Mating area)

G3: Gold over Nickel (Au:3µin[0.076],Mating area)

G15: Gold over Nickel (Au:15µin[0.381],Mating area)

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2547WVE-2P	2.54	7.62	6.10
A2547WVE-3P	5.08	10.16	8.64
A2547WVE-4P	7.62	12.70	11.18
A2547WVE-5P	10.16	15.24	13.72
A2547WVE-6P	12.70	17.78	16.26
A2547WVE-7P	15.24	20.32	18.80
A2547WVE-8P	17.78	22.86	21.34
A2547WVE-9P	20.32	25.40	23.88
A2547WVE-10P	22.86	27.94	26.42
A2547WVE-11P	25.40	30.48	28.96
A2547WVE-12P	27.94	33.02	31.50
A2547WVE-13P	30.48	35.56	34.04
A2547WVE-14P	33.02	38.10	36.58
A2547WVE-15P	35.56	40.64	39.12
A2547WVE-16P	38.10	43.18	41.66
A2547WVE-17P	40.64	45.72	44.20
A2547WVE-18P	43.18	48.26	46.74
A2547WVE-19P	45.72	50.80	49.28
A2547WVE-20P	48.26	53.34	51.82
A2547WVE-21P	50.80	55.88	54.36
A2547WVE-22P	53.34	58.42	56.90
A2547WVE-23P	55.88	60.96	59.44
A2547WVE-24P	58.42	63.50	61.98
A2547WVE-25P	60.96	66.04	64.52

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	4:1	1 of 1	2.54mm PITCH VERTICAL WAFER
DRWN	CHK'D	APPR	
Dengchun Yi	Djankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			DRAWING NO.
			A2547WVE-XP-G
			REV A1