

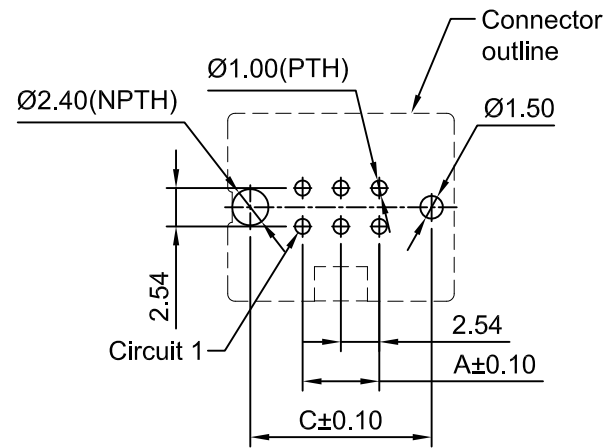
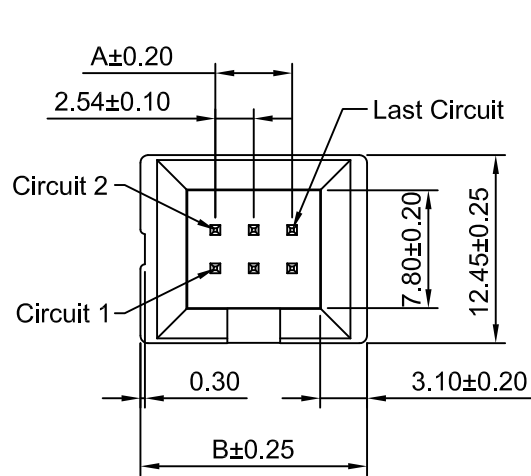
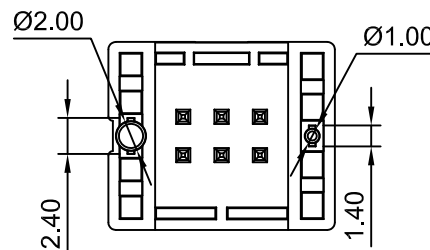
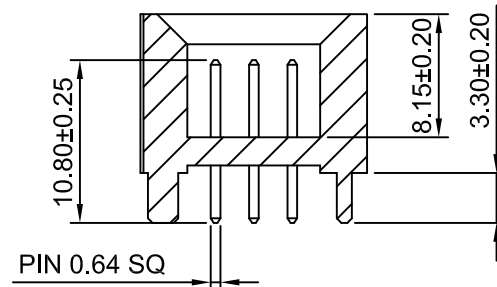



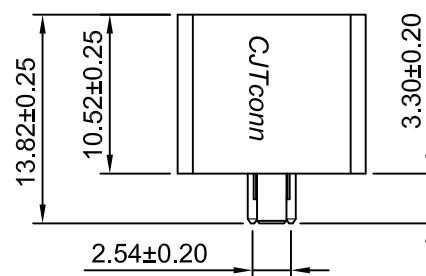

P.C.B LAOUT (TOP VIEW)
TOLERANCE:±0.05

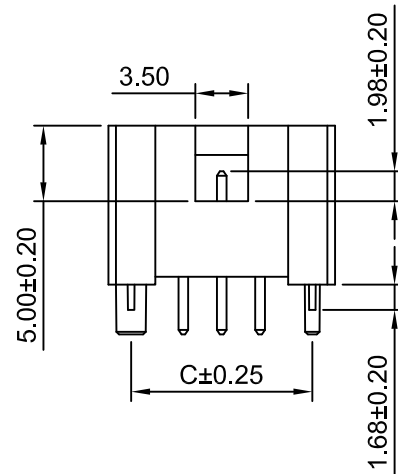

Ordering Information:

A2547WVI-F-2xXP - HCS - *** - ***
1 2 3

1.Part NO.

2.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

G15:Gold over Nickel(15u")

G30:Gold over Nickel(30u")

T: Tin over Nickel

3.Packing:

(Blank): Tray

CRE: Tape & Reel with cap

SPECIFICATIONS:

Current Rating: 5A AC,DC (MAX)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Copper Alloy/Tin over Nickel

Material: Nylon 9T,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2547WVI-F-2x2P-HCS	2.54	12.46	9.46
A2547WVI-F-2x3P-HCS	5.08	15.00	12.00
A2547WVI-F-2x4P-HCS	7.62	17.54	14.54

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	2.54mm PITCH	
DRAWN	CHK'D	APPR	180° DUAL ROW DIP WAFER	
Haisen Li	Diankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			A2547WVI-F-2xXP-HCS	
x,x±0.25			REV	
x,x,x±0.20			A2	
x,x,x,x±0.15				
ANGLES ±1°				

REV	DESCRIPTION	DATE
A2	CHANGE THE DRAWING	2022.08.23
A1	CHANGE THE DRAWING	2022.04.25
A0	NEW RELEASE	2018.05.16