


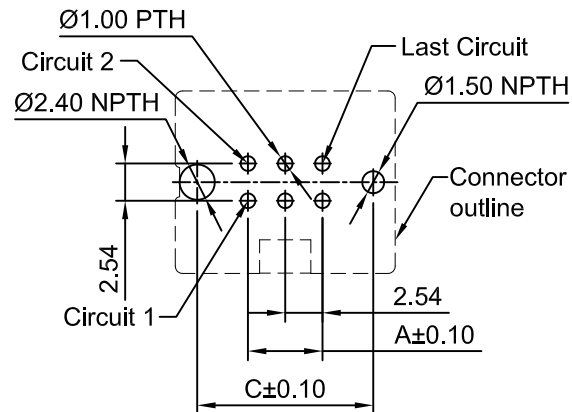
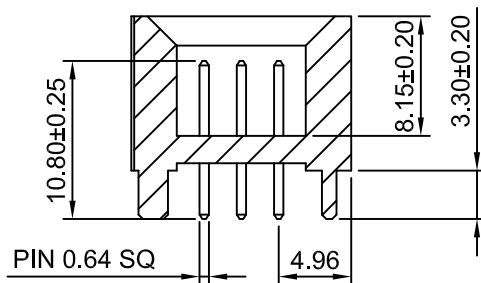
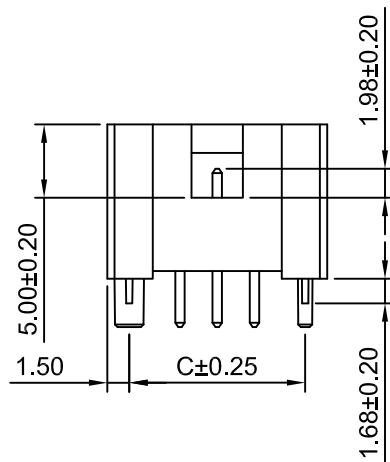
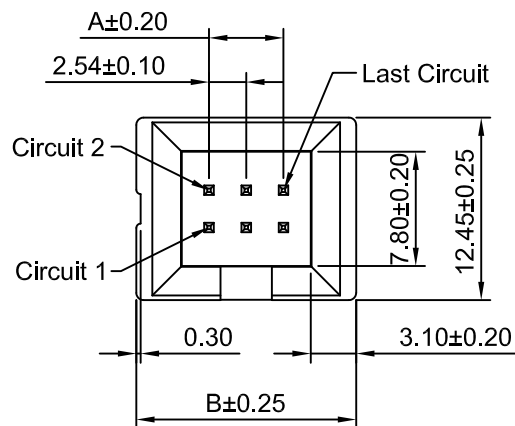


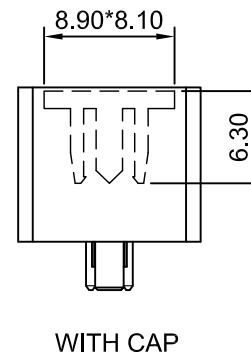

P.C.B LAYOUT
TOLERANCE:±0.05

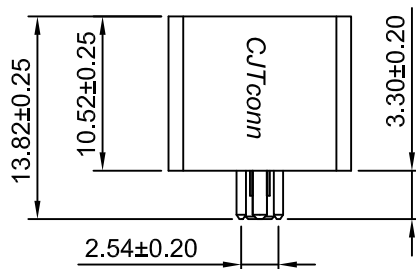

WITH CAP

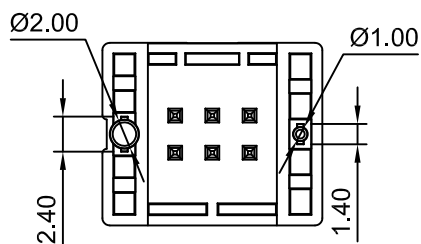

Ordering Information:

A2547WVI-F-2xXP - *** - *** - ***
1 2 3 4

- Part NO.
- Finish:
(Blank): Tin over Nickel
G: Gold over Nickel
- Packing:
(Blank): Tray
CRE: Tape & Reel with cap
- Logo & Marking:
(Blank): With Mark
NK: Without Mark

SPECIFICATIONS:

Current Rating: 5A AC,DC (MAX)
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Phosphor Bronze
Material: Nylon 9T,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2547WVI-2x3P	5.08	15.00	12.00
A2547WVI-2x4P	7.62	17.54	14.54

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1
DRAWN	CHK'D	APPR
Chengbiao Ye	Diankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION
x.x±0.25		
x.xx±0.20		
x.xxx±0.15		
ANGLES ±1°		

2.54mm PITCH
VERTICAL DUAL ROW DIP WAFER

DRAWING NO.	REV
A2547WVI-F-2xXP	A3

REV	DESCRIPTION	DATE
A3	CHANGE THE DRAWING	2023.06.05
A2	CHANGE THE DRAWING	2022.08.23
A1	CHANGE THE DRAWING	2021.12.13
A0	NEW RELEASE	2018.05.16