
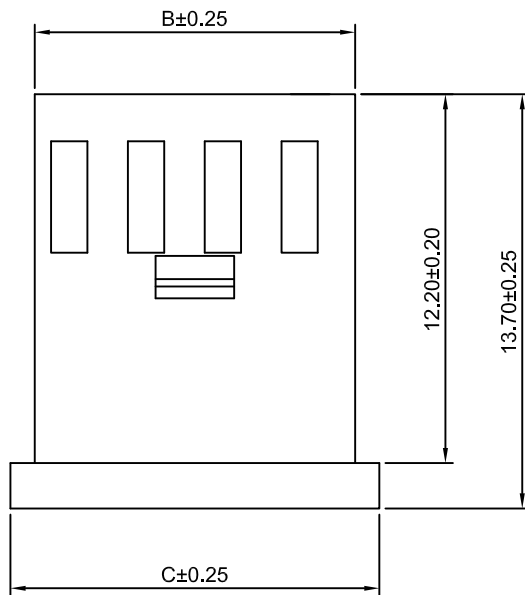


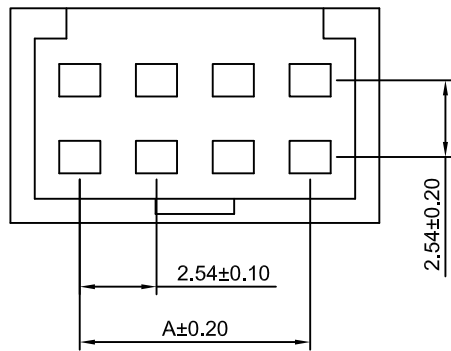

Ordering Information:

A2549H-2xXP - ***
1 2

1.Part No.

2.Material:


(blank): PBT,UL94V-0(Black)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

LCP: LCP,UL94V-0(Beige)



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max


Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: PBT,UL94V-0

Ordering Information & Dimensions

Part No.	Dimensions(mm)		
	A	B	C
A2549H-2x 2P	2.54	5.52	7.12
A2549H-2x 3P	5.08	8.06	9.66
A2549H-2x 4P	7.62	10.60	12.20
A2549H-2x 5P	10.16	13.14	14.74
A2549H-2x 6P	12.70	15.68	17.28
A2549H-2x 7P	15.24	18.22	19.82
A2549H-2x 8P	17.78	20.76	22.36
A2549H-2x 9P	20.32	23.30	24.90
A2549H-2x 10P	22.86	25.84	27.44
A2549H-2x 11P	25.40	28.38	29.98
A2549H-2x 12P	27.94	30.92	32.52
A2549H-2x 13P	30.48	33.46	35.06
A2549H-2x 14P	33.02	36.00	37.60
A2549H-2x 15P	35.56	38.54	40.14
A2549H-2x 16P	38.10	41.08	42.68
A2549H-2x 17P	40.64	43.62	45.22
A2549H-2x 18P	43.18	46.16	47.76
A2549H-2x 19P	45.72	48.70	50.30
A2549H-2x 20P	48.26	51.24	52.84
A2549H-2x 21P	50.80	53.78	55.38
A2549H-2x 22P	53.34	56.32	57.92

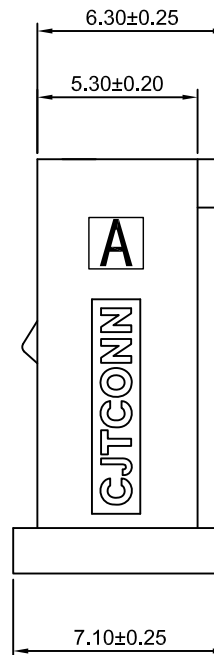

A1	ADD THE INFORMATION	2020.05.23
A0	NEW RELEASE	2010.10.09
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.					
Unit	Scale	Sheet	TITLE 2.54mm PITCH HOUSING		
mm	5:1	1 of 1			
DRN	CHK	APVD			
Dengchun Yi	DianKul Wan	Jack Yin	DRAWING NO A2549H-2xXP		
General Tolerance		THIRD ANGLE PROJECTION			
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°					
			REV A1		