
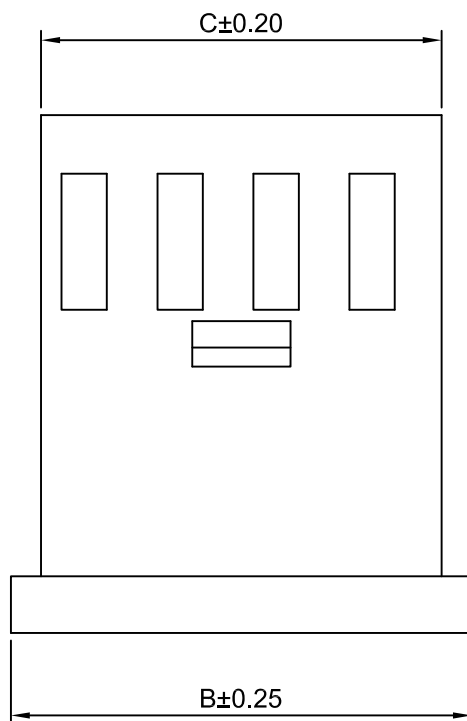


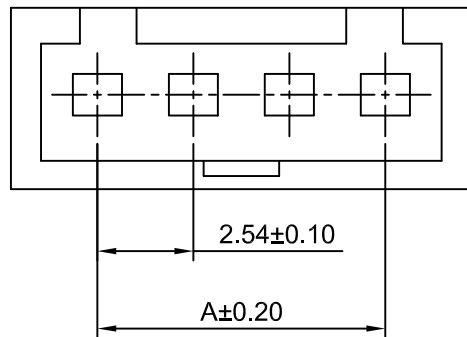

Ordering Information:

A2549H-XP - ***

1 2

1.Part No.

2.Material:


(blank): PBT,UL94V-0(Black)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

LCP: LCP,UL94V-0(Beige)



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max


Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: PBT,UL94V-0

Ordering Information & Dimensions

Part No.	Dimensions(mm)		
	A	B	C
A2549H- 2P	2.54	7.12	5.60
A2549H- 3P	5.08	9.66	8.14
A2549H- 4P	7.62	12.20	10.68
A2549H- 5P	10.16	14.74	13.22
A2549H- 6P	12.70	17.28	15.76
A2549H- 7P	15.24	19.82	18.30
A2549H- 8P	17.78	22.36	20.84
A2549H- 9P	20.32	24.90	23.38
A2549H- 10P	22.86	27.44	25.92
A2549H- 11P	25.40	29.98	28.46
A2549H- 12P	27.94	32.52	31.00
A2549H- 13P	30.48	35.06	33.54
A2549H- 14P	33.02	37.60	36.08
A2549H- 15P	35.56	40.14	38.62
A2549H- 16P	38.10	42.68	41.16
A2549H- 17P	40.64	45.22	43.70
A2549H- 18P	43.18	47.76	46.24
A2549H- 19P	45.72	50.30	48.78
A2549H- 20P	48.26	52.84	51.32
A2549H- 21P	50.80	55.38	53.86
A2549H- 22P	53.34	57.92	56.40

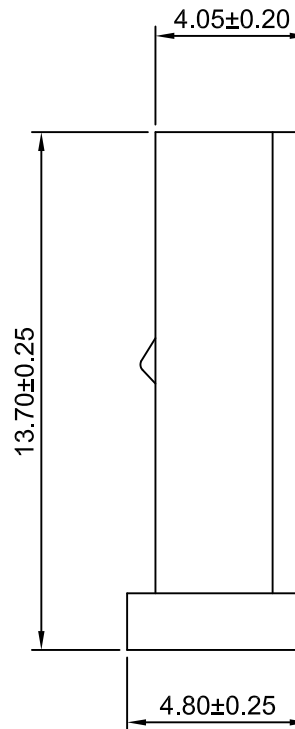

A1	ADD THE INFORMATION	2020.05.23
A0	NEW RELEASE	2011.05.13
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	5:1	1 of 1	
DRN	CHK	APVD	
Dengchun Yi	DianKul Wan	Jack Yin	2.54mm PITCH HOUSING
General Tolerance			
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°			THIRD ANGLE PROJECTION
			
			DRAWING NO
			REV A1
			A2549H-XP