
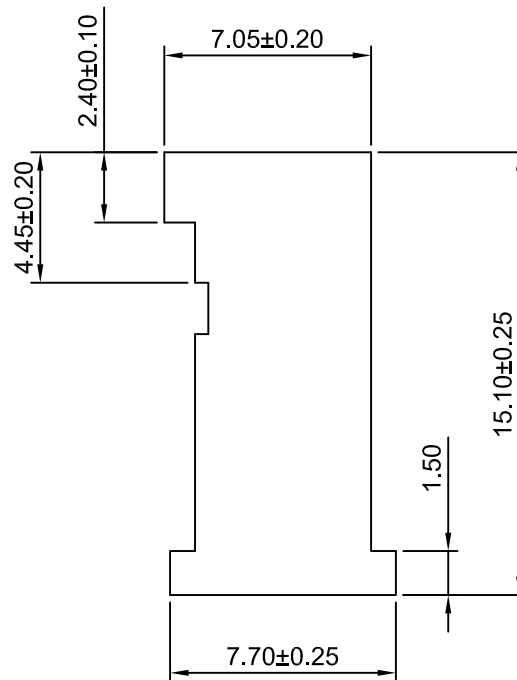
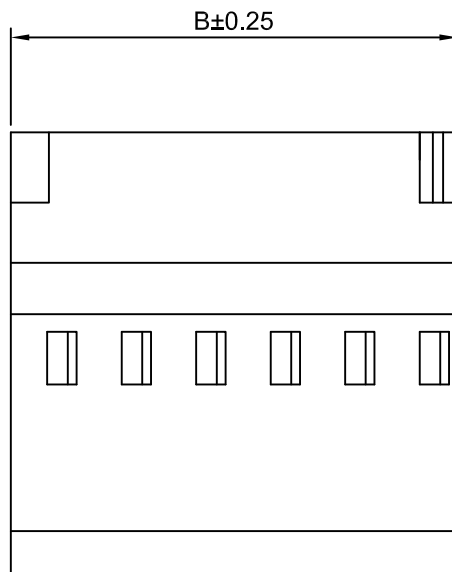


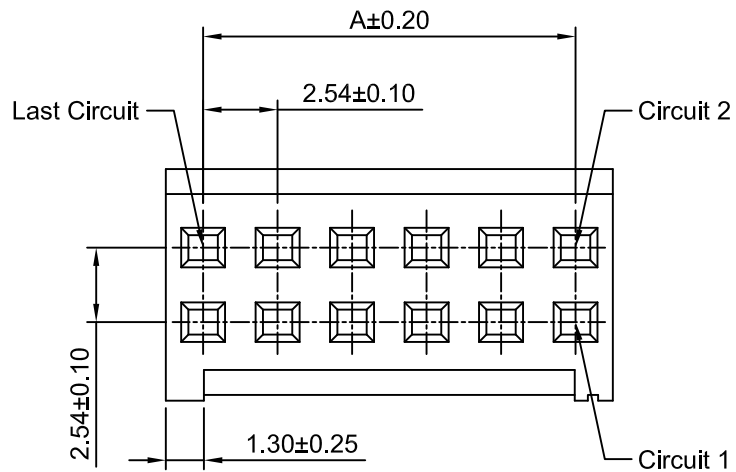

Ordering Information:

A2549HB-2xXP - **
1 2

1.Part NO.

2.Color:

(Blank): Blue

BK: Black

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: 20m Ω Max

Insulation Resistance: 1000M Ω Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		Part NO.	Dimensions(mm)	
	A	B		A	B
2x2P	2.54	5.08	2x12P	27.94	30.48
2x3P	5.08	7.62	2x13P	30.48	33.02
2x4P	7.62	10.16	2x14P	33.02	35.56
2x5P	10.16	12.70	2x15P	35.56	38.10
2x6P	12.70	15.24	2x16P	38.10	40.64
2x7P	15.24	17.78	2x17P	40.64	43.18
2x8P	17.78	20.32	2x18P	43.18	45.72
2x9P	20.32	22.86	2x19P	45.72	48.26
2x10P	22.86	25.40	2x20P	48.26	50.80
2x11P	25.40	27.94			

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.		
Unit	Scale	Sheet	TITLE		
mm	4:1	1 of 1			
DRWN	CHK'D	APPR	2.54mm PITCH DUAL ROW HOUSING		
Haisen Li	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV A2
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°					
		A2549HB-2xXP			

A2	CHANGE THE DRAWING	2021.11.20
A1	CHANGE THE DRAWING	2020.08.27
A0	NEW RELEASE	2011.05.13
REV	DESCRIPTION	DATE