

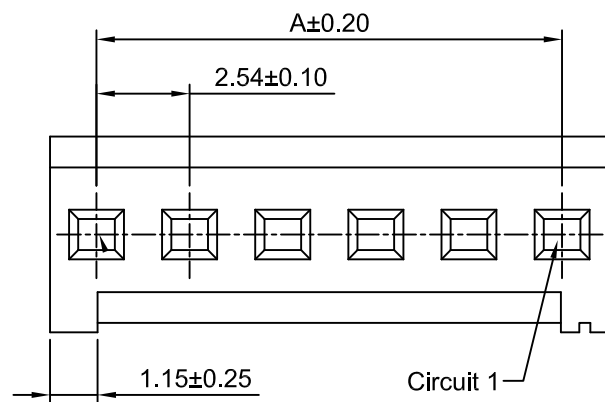


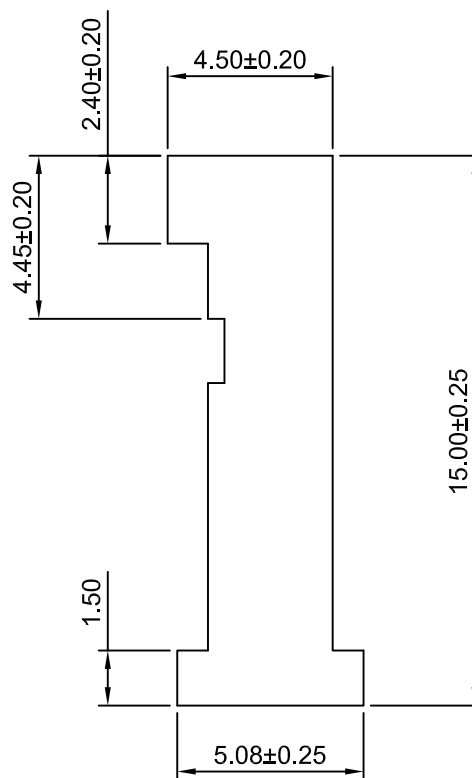

5P~20P

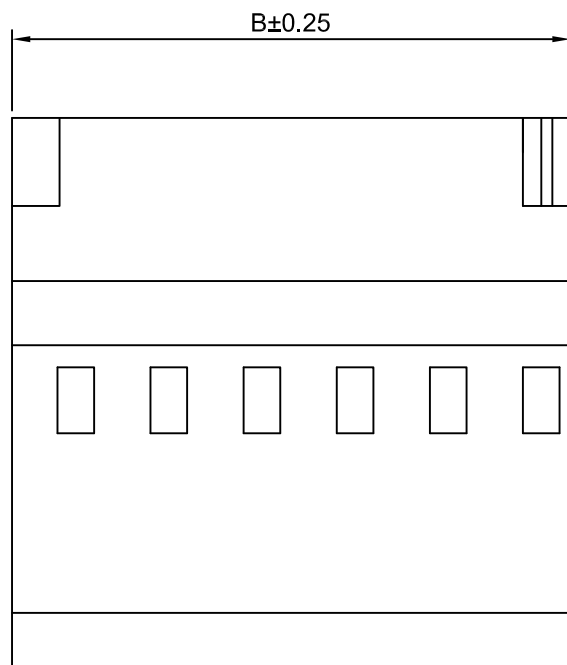

Ordering Information:

A2549HB-2xXP - **
1 2

1.Part NO.

2.Color:

(Blank): Blue

BK: Black

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66+15%GF,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		Part NO.	Dimensions(mm)	
	A	B		A	B
2P	2.54	5.08	12P	27.94	30.48
3P	5.08	7.62	13P	30.48	33.02
4P	7.62	10.16	14P	33.02	35.56
5P	10.16	12.70	15P	35.56	38.10
6P	12.70	15.24	16P	38.10	40.64
7P	15.24	17.78	17P	40.64	43.18
8P	17.78	20.32	18P	43.18	45.72
9P	20.32	22.86	19P	45.72	48.26
10P	22.86	25.40	20P	48.26	50.80
11P	25.40	27.94			

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1		
DRWN	CHK'D	APPR	2.54mm PITCH SINGLE ROW HOUSING	
Chengbiao Ye	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A2549HB-XP	A5

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2011.05.13
A1	CHANGE THE SIZE	2013.10.20
A2	CHANGE THE CIRCUIT 1	2019.02.20
A3	ADD THE DRAWING OF 2P~4P	2020.08.27
A4	CHANGE THE DRAWING	2021.04.06
A5	CHANGE THE DRAWING	2023.01.31