
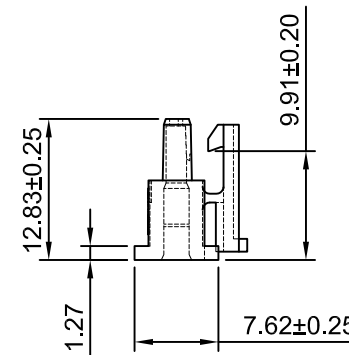
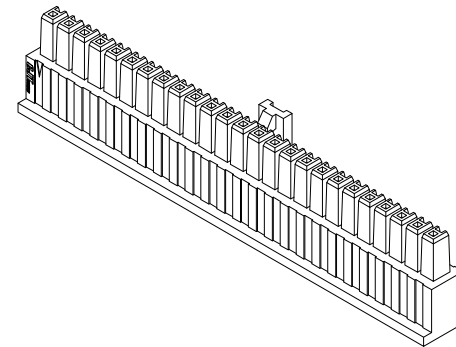





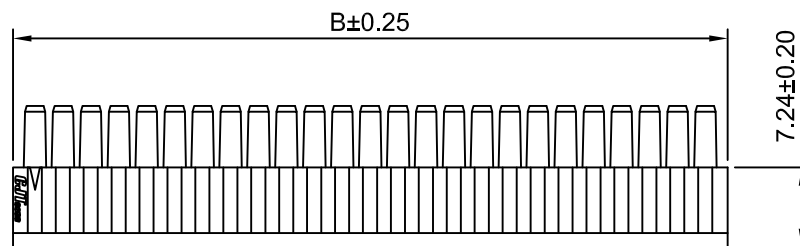


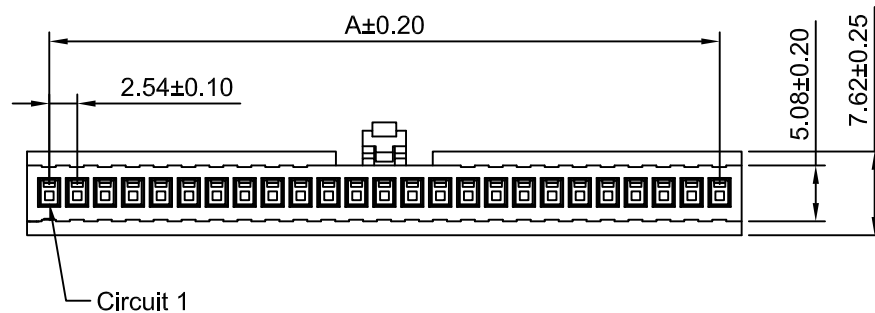

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2549HI-2P	2.54	8.33
A2549HI-3P	5.08	9.09
A2549HI-4P	7.62	11.63
A2549HI-5P	10.16	14.17
A2549HI-6P	12.70	16.71
A2549HI-7P	15.24	19.25
A2549HI-8P	17.78	21.79
A2549HI-9P	20.32	24.33
A2549HI-10P	22.86	26.87
A2549HI-11P	25.40	29.41
A2549HI-12P	27.94	31.95
A2549HI-13P	30.48	34.49
A2549HI-14P	33.02	37.03
A2549HI-15P	35.56	39.57
A2549HI-16P	38.10	42.11
A2549HI-17P	40.64	44.65
A2549HI-18P	43.18	47.19
A2549HI-19P	45.72	49.73
A2549HI-20P	48.26	52.27
A2549HI-21P	50.80	54.81
A2549HI-22P	53.34	57.35
A2549HI-23P	55.88	59.89
A2549HI-24P	58.42	62.43
A2549HI-25P	60.96	64.97

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	1.5:1	1 of 1	2.54mm PITCH SINGLE ROW HOUSING
DRWN	CHK'D	APPR	
Dengchun YI	Dlankul Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			
			A2549HI-XP
			REV A1

A1	CHANGE THE DRAWING	2020.05.13
A0	NEW RELEASE	2011.05.13
REV	DESCRIPTION	DATE