
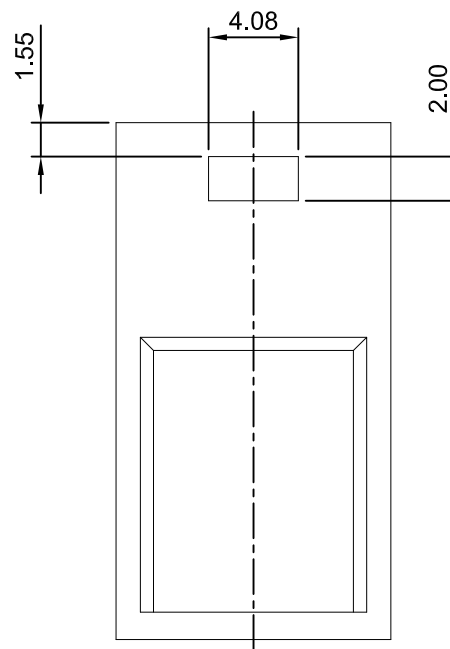
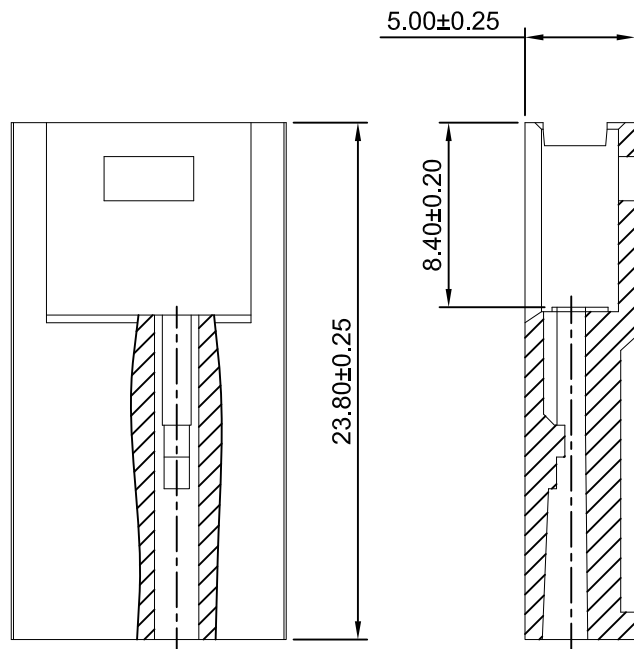


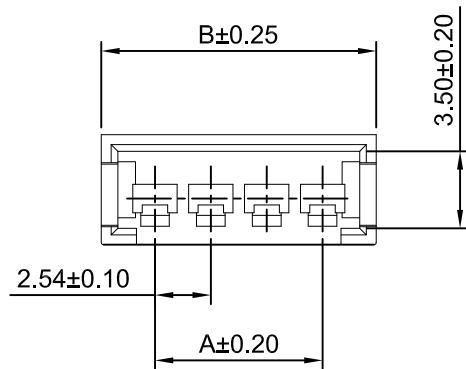

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: 20m Ω Max
Insulation Resistance: 1000M Ω Min
Withstanding Voltage: 1000V AC/minute
Material: Nylon 66,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2549HM-2P	2.54	7.42
A2549HM-3P	5.08	9.96
A2549HM-4P	7.62	12.50
A2549HM-5P	10.16	15.04
A2549HM-6P	12.70	17.58
A2549HM-7P	15.24	20.12
A2549HM-8P	17.78	22.66
A2549HM-9P	20.32	25.20
A2549HM-10P	22.86	27.74
A2549HM-11P	25.40	30.28
A2549HM-12P	27.94	32.82
A2549HM-13P	30.48	35.36
A2549HM-14P	33.02	37.90
A2549HM-15P	35.56	40.44
A2549HM-16P	38.10	42.98
A2549HM-17P	40.64	45.52
A2549HM-18P	43.18	48.06
A2549HM-19P	45.72	50.60
A2549HM-20P	48.26	53.14

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	3:1	1 of 1	2.54mm PITCH HOUSING		
DRWN	CHK'D	APPR			
Chengbiao Ye	Djankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO.		REV A2
			A2549HM-XP		

A2	CHANGE THE DRAWING	2023.01.31
A1	CHANGE THE DRAWING	2020.05.13
A0	NEW RELEASE	2005.07.01
REV	DESCRIPTION	DATE