

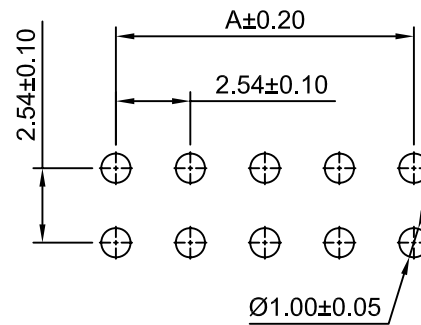
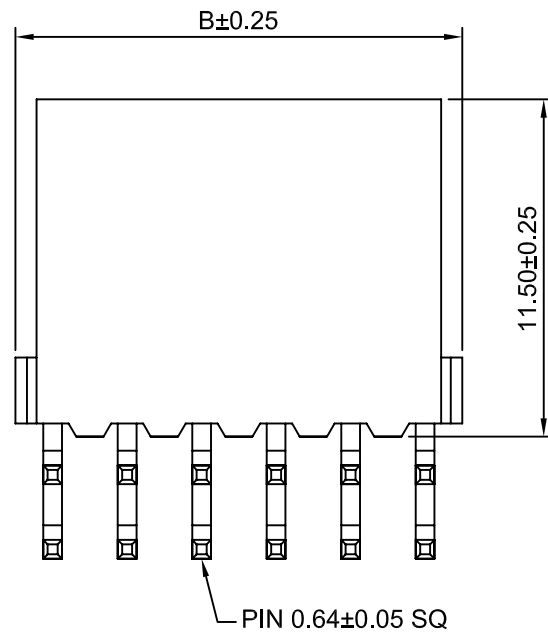


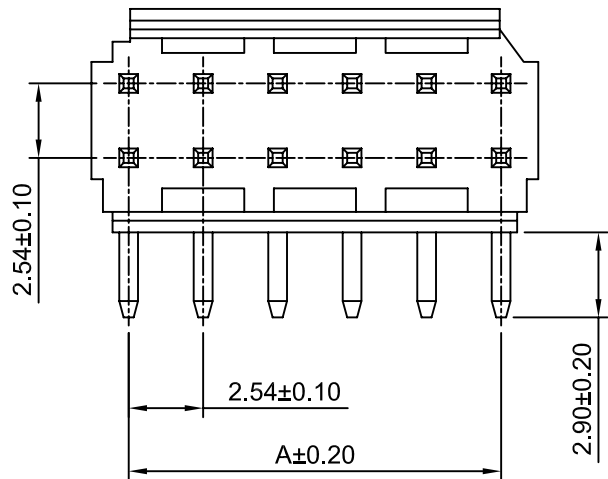

P.C.B LAYOUT

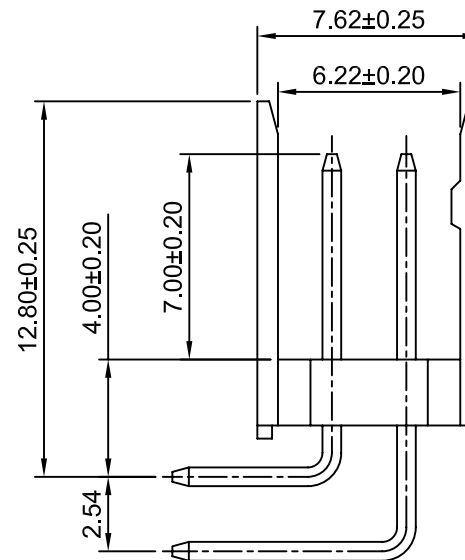

Ordering Information:

A2549WRB-2xXP - * - **
1 2 3

1.Part No.

2.Color:


(Blank):Blue

BK:Black

3.Plated:

(blank):Tin over Nickel

G : Glold over Nickel

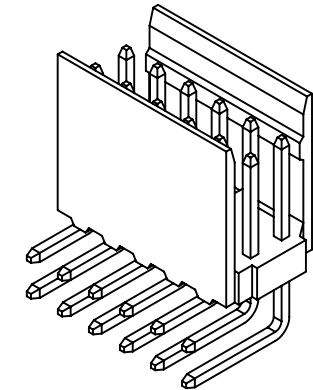

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66+15%GF,UL94V-0 (Blue)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	2.54	5.08	2x8P	17.78	20.32
2x3P	5.08	7.62	2x10P	22.86	25.40
2x4P	7.62	10.16	2x12P	27.94	30.48
2x5P	10.16	12.70	2x15P	35.56	38.10
2x6P	12.70	15.24	2x17P	35.56	43.18
2x7P	15.24	17.78	2x18P	35.56	45.72

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1

Draw BY:	Approved :
LIZQ	GONGYB

General Tolerance

x.x±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	

Title :
2.54mm PITCH
DUAL ROW 90° WAFER

DRAW NO : A2549WRB-2xXP REV A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2005.05.10