

P.C.B LAYOUT (TOP VIEW)
TOLERANCE:±0.05

Ordering Information:
A2549WRB-S-XP - $\frac{***}{1} - \frac{***}{2} - \frac{***}{3}$




- 1.Part NO.
- 2.Color:
(blank): Blue
BK: Black
NAT: Natural
- 3.Finish:
(blank): Tin over Nickel
G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass
Material: Nylon 46,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2549WRB-S-2P	2.54	3.82
A2549WRB-S-3P	5.08	6.36
A2549WRB-S-4P	7.62	8.90
A2549WRB-S-5P	10.16	11.44
A2549WRB-S-6P	12.70	13.98
A2549WRB-S-7P	15.24	16.52
A2549WRB-S-8P	17.78	19.06
A2549WRB-S-9P	20.32	21.60
A2549WRB-S-10P	22.86	24.14
A2549WRB-S-11P	25.40	26.68
A2549WRB-S-12P	27.94	29.22
A2549WRB-S-13P	30.48	31.76
A2549WRB-S-14P	33.02	34.30
A2549WRB-S-15P	35.56	36.84
A2549WRB-S-16P	38.10	39.38
A2549WRB-S-17P	40.64	41.92
A2549WRB-S-18P	43.18	44.46
A2549WRB-S-19P	45.72	47.00
A2549WRB-S-20P	48.26	49.54

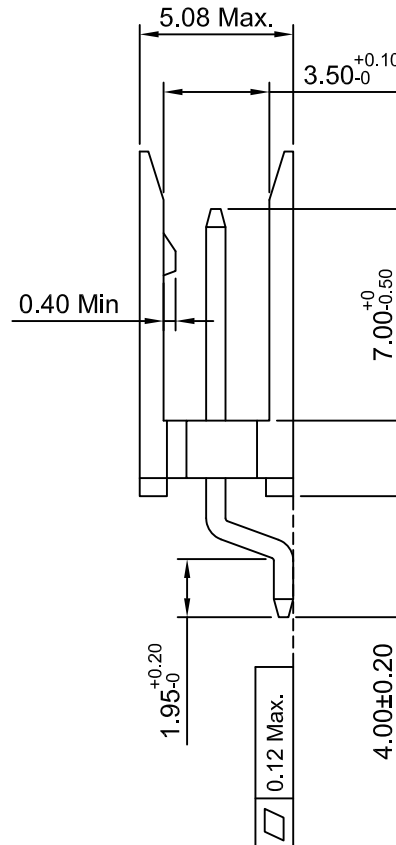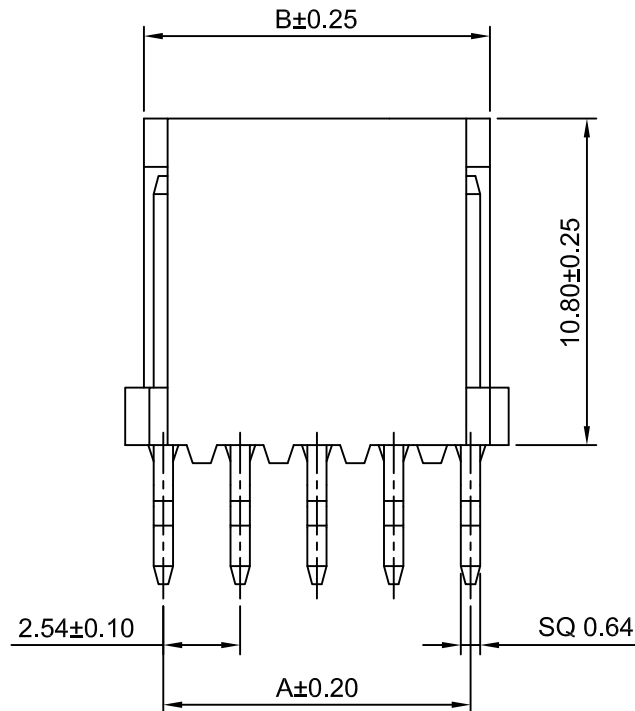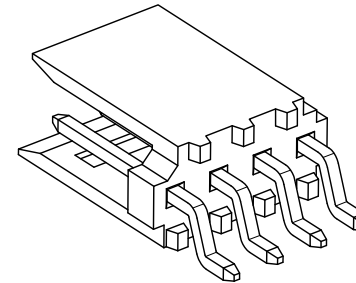

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1		
DRWN	CHK'D	APPR	2.54mm PITCH SINGLE ROW 90° WAFER - SMD TYPE	
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A1
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°				