
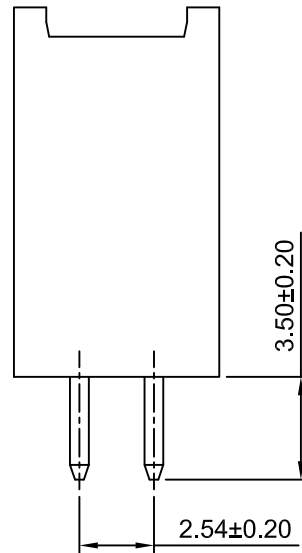

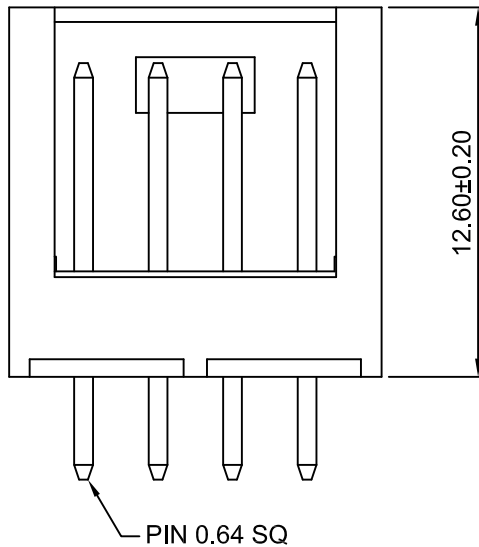


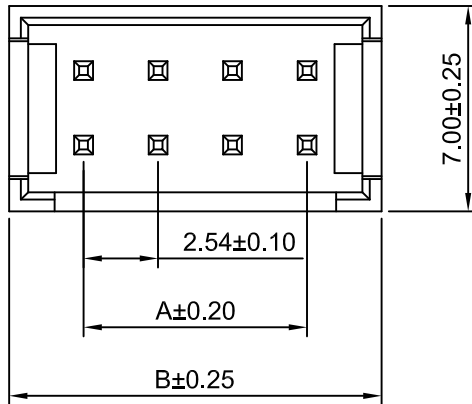

Ordering Information:

A2549WV-2xXP - ***

1 2

1.Part No.

2.Material:

(Blank):Nylon 6T,UL94V-0

46:Nylon 46,UL94V-0

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	2.54	7.62	2x13P	30.48	35.56
2x3P	5.08	10.16	2x14P	33.02	38.10
2x4P	7.62	12.70	2x15P	35.56	40.64
2x5P	10.16	15.24	2x16P	38.10	43.18
2x6P	12.70	17.78	2x17P	40.64	45.72
2x7P	15.24	20.32	2x18P	43.18	48.26
2x8P	17.78	22.86	2x19P	45.72	50.08
2x9P	20.32	25.40	2x20P	48.26	53.34
2x10P	22.86	27.94	2x21P	50.08	55.88
2x11P	25.40	30.48	2x22P	53.34	58.42
2x12P	27.94	33.02			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	8:1	1 of 1

Draw By:	Approved :
Dengchun Yi	Jack Yin

General Tolerance

A1	CHANGE THE DRAWING	2018.11.30	x.x±0.25	PROJECT ⊕ ⊖
A0	NEW RELEASE	2012.10.11	x.xx±0.20	
REV	DESCRIPTION	DATE	x.xxx±0.15	

Title :

2.54mm PITCH

180° DUAL ROW WAFER

DRAW NO : A2549WV-2xXP

REV
A1