
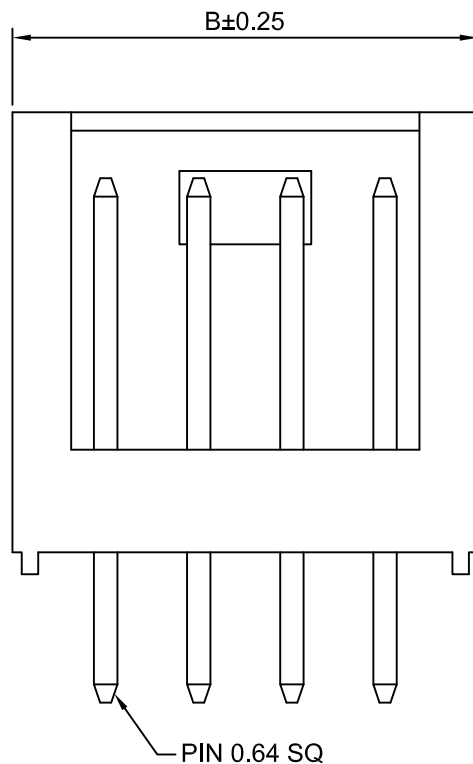
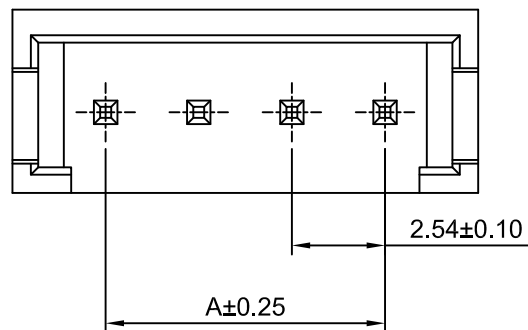


P.C.B LAYOUT

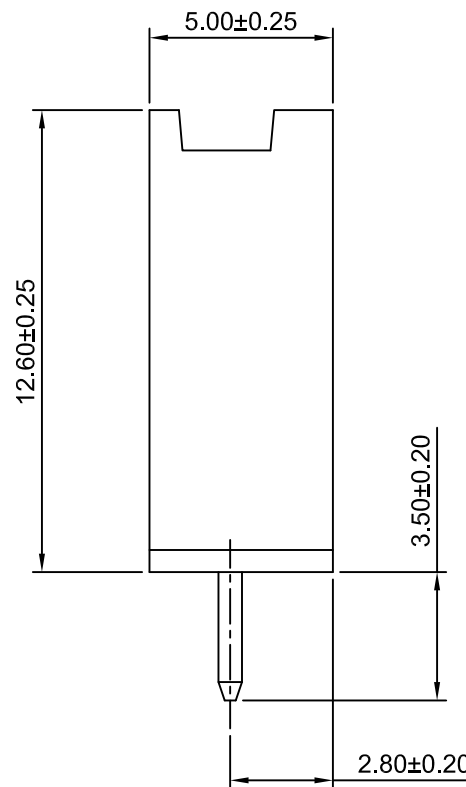

Ordering Information:

A2549WV-XP - ***
1 2


1.Part No.

2.Material:

(Blank):PBT,UL94V-0

46 :Nylon 46,UL94V-0

9T :Nylon 9T,UL94V-0



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	7.62	13P	30.48	35.56
3P	5.08	10.16	14P	33.02	38.10
4P	7.62	12.70	15P	35.56	40.64
5P	10.16	15.24	16P	38.10	43.18
6P	12.70	17.78	17P	40.64	45.72
7P	15.24	20.32	18P	43.18	48.26
8P	17.78	22.86	19P	45.72	50.80
9P	20.32	25.40	20P	48.26	53.34
10P	22.86	27.94	21P	50.80	55.88
11P	25.40	30.48	22P	53.34	58.42
12P	27.94	33.02			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1

Title :

2.54mm PITCH

Draw By:

Dlankul Wan

Approved :

Jack Yln

180° SINGLE ROW WAFER

General Tolerance

PROJECT

DRAW NO : A2549WV-XP

REV
A1

REV	DESCRIPTION	DATE
A1	ADD THE MATERIAL NYLON 46	2018.11.30
A0	NEW RELEASE	2005.05.10

x.x±0.25
x.xx±0.20
x.xxx±0.15