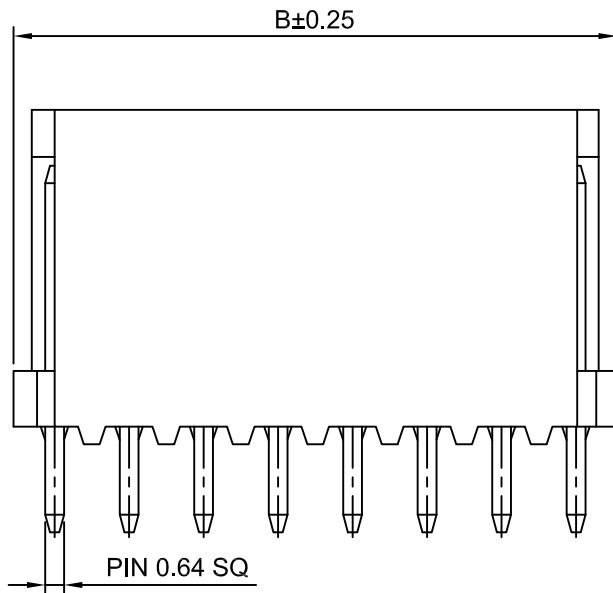
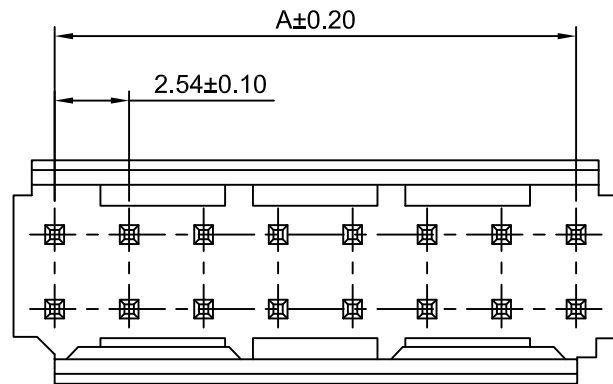


P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:

A2549WVB-2xXP - $\frac{**}{1}$ - $\frac{**}{2}$ - $\frac{**}{3}$

1.Part NO.

2.Color:


(Blank):Blue

BK:Black

3.Finish:

(blank):Tin over Nickel

G:Gold over Nickel



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0 (Blue)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2549WVB-2x2P	2.54	5.08
A2549WVB-2x3P	5.08	7.62
A2549WVB-2x4P	7.62	10.16
A2549WVB-2x5P	10.16	12.70
A2549WVB-2x6P	12.70	15.24
A2549WVB-2x7P	15.24	17.78
A2549WVB-2x8P	17.78	20.32
A2549WVB-2x9P	20.32	22.86
A2549WVB-2x10P	22.86	25.40
A2549WVB-2x11P	25.40	27.94
A2549WVB-2x12P	27.94	30.48
A2549WVB-2x13P	30.48	33.02
A2549WVB-2x14P	33.02	35.56
A2549WVB-2x15P	35.56	38.10
A2549WVB-2x16P	38.10	40.64
A2549WVB-2x17P	40.64	43.18
A2549WVB-2x18P	43.18	45.72
A2549WVB-2x19P	45.72	48.26
A2549WVB-2x20P	48.26	50.80

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1	2.54mm PITCH 180° DUAL ROW WAFER	
DRWN	CHK'D	APPR		
Dengchun Yi	Dlankut Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	
x.xx±0.25 x.xx±0.20 x.xx±0.15 ANGLES ±1°			A2549WVB-2xXP	
A0	NEW RELEASE		REV A1	
REV	DESCRIPTION	DATE		