

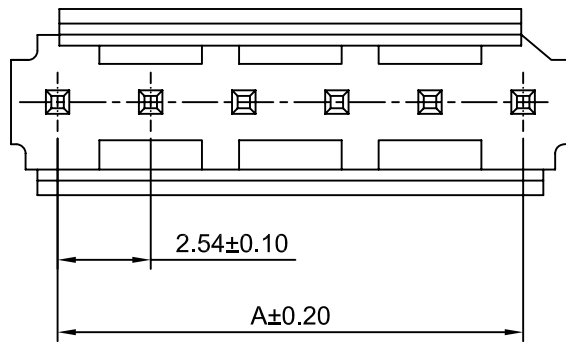


P.C.B LAYOUT

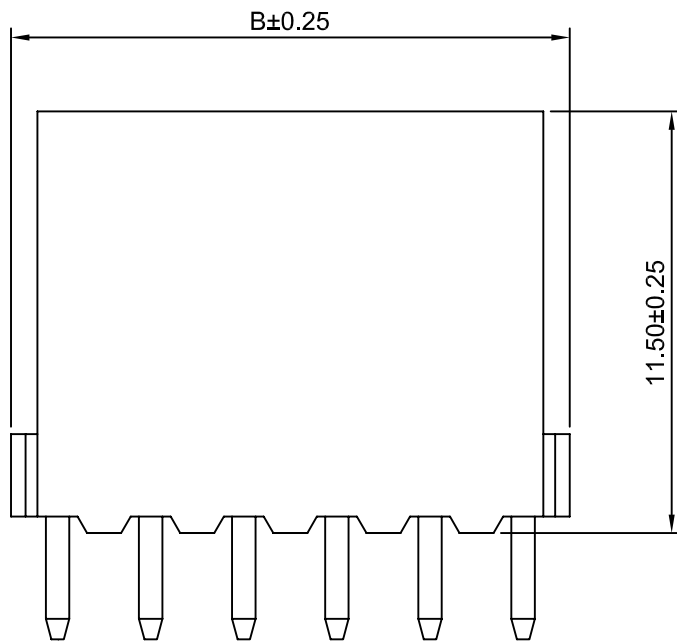

PIN 0.64±0.05 SQ

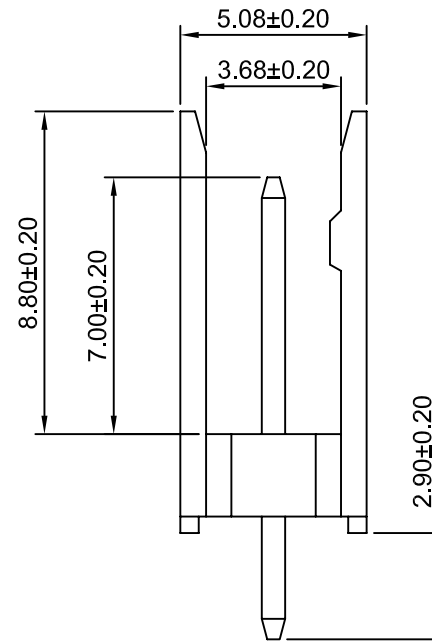

Ordering Information:

A2549WVB-XP - * - **
1 2 3

1.Part No.

2.Color:


(Blank):Blue

BK:Black

3.Plated:

(blank) : Tin over Nickel

G : Glold over Nickel

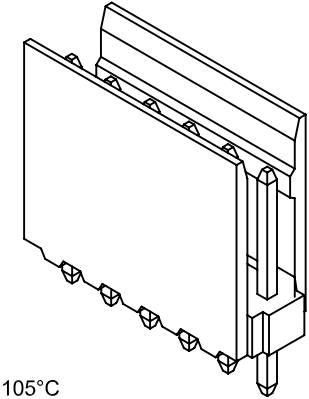

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66+15%GF,UL94V-0 (Blue)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	5.08	11P	25.40	27.94
3P	5.08	7.62	12P	27.94	30.48
4P	7.62	10.16	13P	30.48	33.02
5P	10.16	12.70	14P	33.02	35.56
6P	12.70	15.24	15P	35.56	38.10
7P	15.24	17.78	16P	38.10	40.64
8P	17.78	20.32	17P	40.64	43.18
9P	20.32	22.86	18P	43.18	45.72
10P	22.86	25.40			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm, Scale: 5:1, Sheet: 1 of 1

Draw BY: LIZQ, Approved: GONGYB

General Tolerance

x.x±0.25, x.xx±0.20, x.xxx±0.15, ANGLE±

Title :

2.54mm PITCH

SINGLE ROW 180° WAFER

DRAW NO :

A2549WVB-XP

REV A0

A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE