
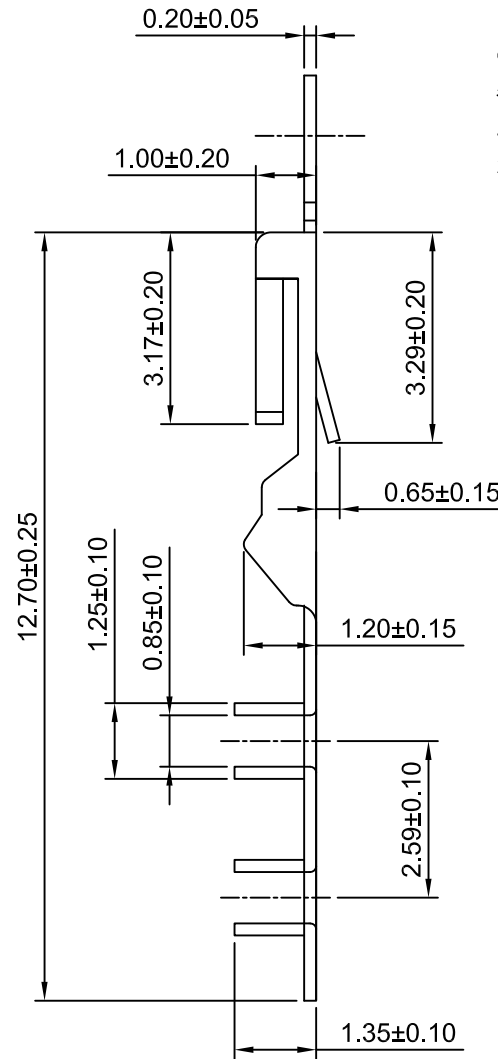


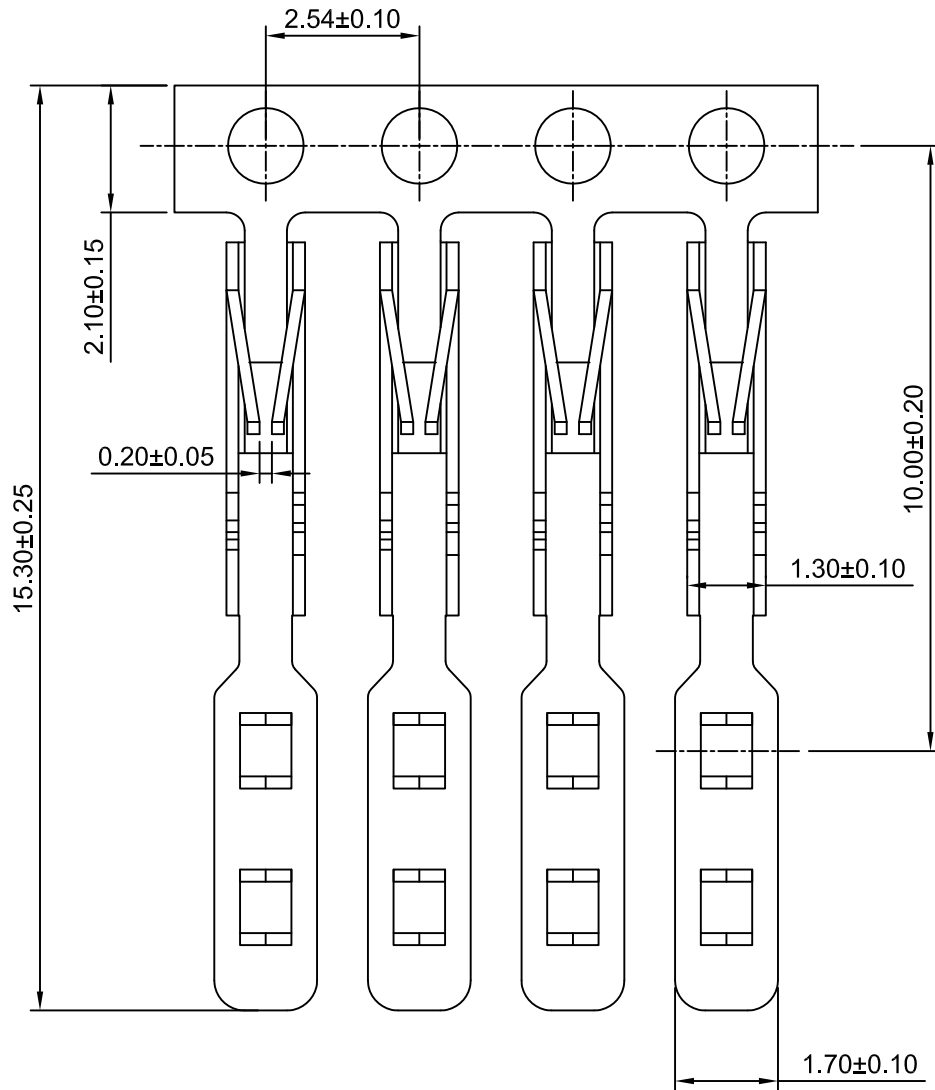

eOrdering Information:

A2550-GP-C - ***

1 2

1.Part NO.


2.Finish(Just for Gold over Nickel):

(Blank): Gold over Nickel (Au:1u"Mating area.)

G3: Gold over Nickel (Au:3u"Mating area.)

G15: Gold over Nickel (Au:15u"Mating area.)

G30: Gold over Nickel (Au:30u"Mating area.)



Winding Direction

技术要求:

1.镀层要求: 镍底镀锡/镀金

Au:1µin/3µin/10µin/15µin/30µin...

(GP/-G3/-G15/G30)...

Sn:80~120µin

Ni:30~50µin

Ordering information & Specifications

Unit:mm

Part No.	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
A2550-TP-C	FFC WIRE	----	Phosphor Bronze	Tin over Nickel	20,000 PCS
A2550-GP-C	FFC WIRE	----	Phosphor Bronze	Gold over Nickel	20,000 PCS

A3	MODIFY DRAWING	2023.01.04
A2	CHANGE THE DRAWING	2021.12.23
A1	CHANGE THE DRAWING	2021.03.09
A0	NEW RELEASE	2011.09.17
REV	DESCRIPTION	DATE

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	8:1	1 of 1	2.54mm PITCH CRIMP FLEX TERMINAL	
DRAWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	
x,x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			A2550-T-C	
			REV	A3