
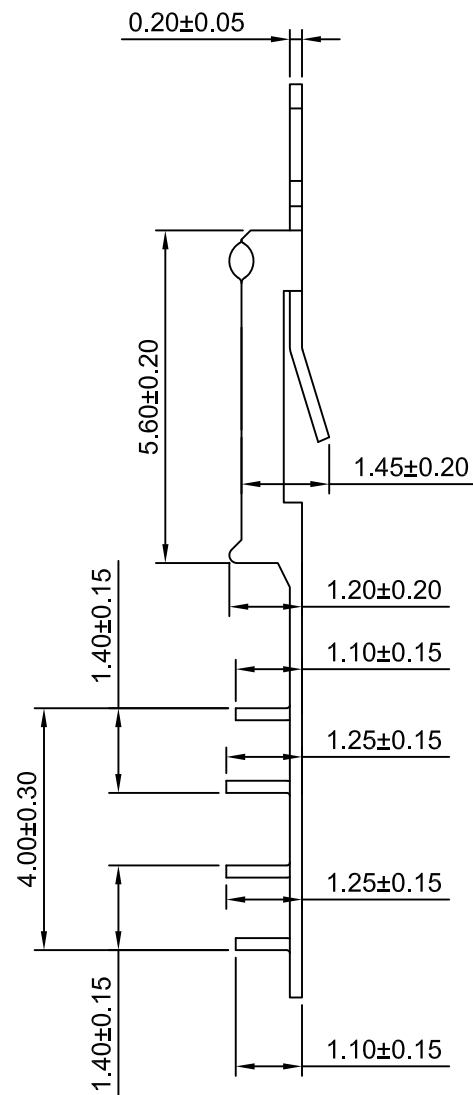


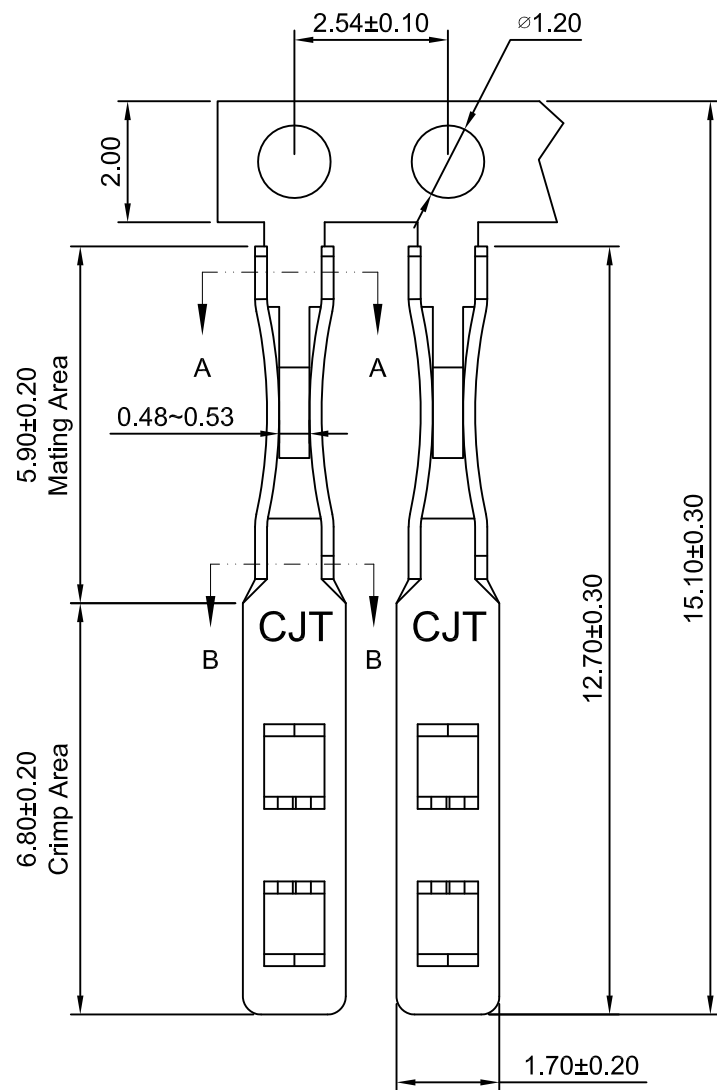

Ordering Information:

A2550-T - *** - ***
1 2 3

1.Part NO.

2.Finish

(blank): Mating Area: 80~120µin (2.03µm~3.05µm) . Tin
or 1µin (0.025µm) MIN. Gold
Crimp Area: 80~120µin (2.03µm~3.05µm) . Tin
All Area: 30~50µin(0.76µm~1.27µm). Nickel

TG: Mating Area: 80~120µin (2.03µm~3.05µm) . Tin
Crimp Area: 1µin (0.025µm) MIN. Gold
All Area: 30~50µin(0.76µm~1.27µm). Nickel

GG: Mating Area: 1µin (0.025µm) MIN. Gold
Crimp Area: 1µin (0.025µm) MIN. Gold
All Area: 30~50µin(0.76µm~1.27µm). Nickel

GT15: Mating Area: 15µin (0.38µm) MIN. Gold
Crimp Area: 80~120µin (2.03µm~3.05µm) . Tin
All Area: 30~50µin(0.76µm~1.27µm). Nickel

GT30: Mating Area: 30µin (0.76µm) MIN. Gold
Crimp Area: 80~120µin (2.03µm~3.05µm) . Tin
All Area: 30~50µin(0.76µm~1.27µm). Nickel

GG15: Mating Area: 15µin (0.38µm) MIN. Gold
Crimp Area: 1µin (0.025µm) MIN. Gold
All Area: 30~50µin(0.76µm~1.27µm). Nickel


GG30: Mating Area: 30µin (0.76µm) MIN. Gold
Crimp Area: 1µin (0.025µm) MIN. Gold
All Area: 30~50µin(0.76µm~1.27µm). Nickel

3.Winding Direction


(blank): TYPE 1

2: TYPE 2

3: TYPE 3

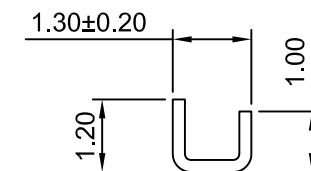

SEC:A-A



SEC:B-B


Ordering information & Specifications

Unit:mm


Part NO.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A2550-TP	FFC WIRE	----	Phosphor Bronze	Tin over Nickel	20,000 PCS
A2550-GP	FFC WIRE	----	Phosphor Bronze	Gold over Nickel	20,000 PCS

A3	ADD THE SIZE & SHEET 2	2020.08.06
A2	CHANGE THE DRAWING	2017.03.30
A1	CHANGE THE TOLERANCE	2011.10.25
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE


CJTconn CHANGJIANG CONNECTORS CO.,LTD.				
Unit	Scale	Sheet	TITLE	
mm	8:1	1 of 2		
DRWN	CHK'D	APPR	2.54mm PITCH CRIMP FLEX TERMINAL	
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°				
			REV A3	
			A2550-T	

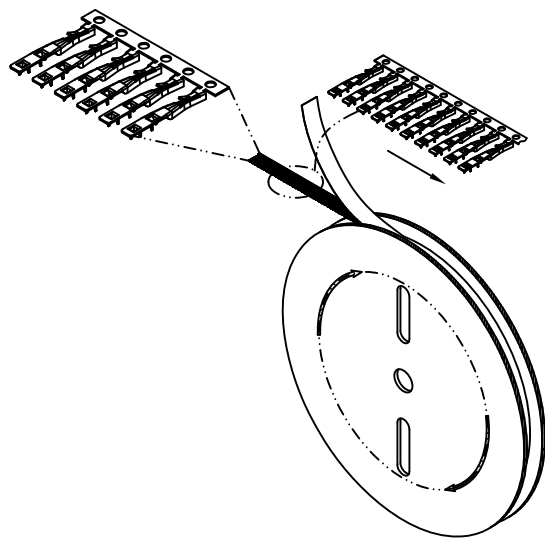

TYPE 1

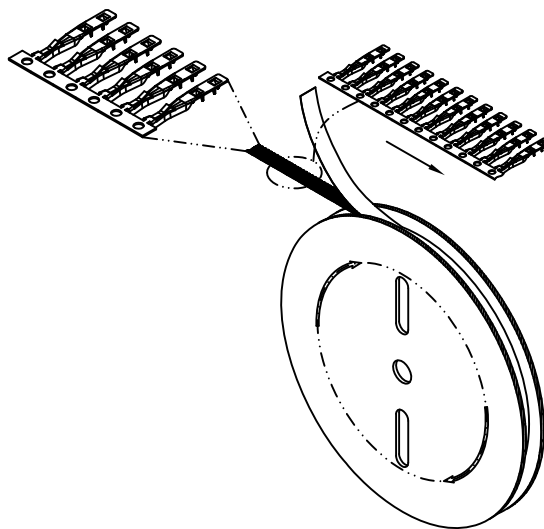

TYPE 2

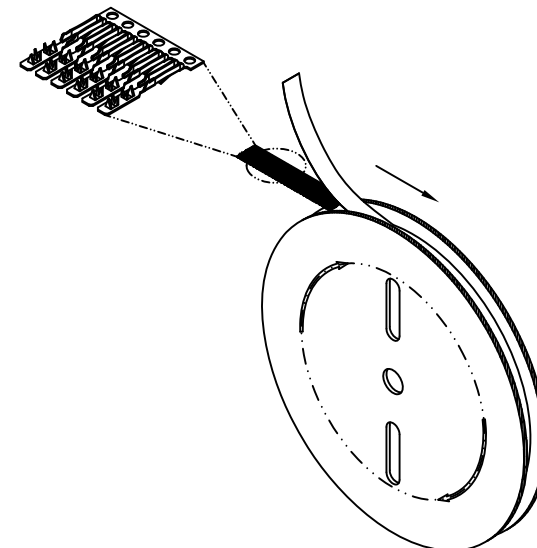

TYPE 3

WINDING DIRECTION

Ordering information & Specifications

Unit:mm

Part NO.	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
A2550-TP	FFC WIRE	———	Phosphor Bronze	Tin over Nickel	20,000 PCS
A2550-GP	FFC WIRE	———	Phosphor Bronze	Gold over Nickel	20,000 PCS

A3	ADD THE SIZE & SHEET 2	2020.08.06
A2	CHANGE THE DRAWING	2017.03.30
A1	CHANGE THE TOLERANCE	2011.10.25
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.				
Unit	Scale	Sheet	TITLE 2.54mm PITCH CRIMP FLEX TERMINAL	
mm	8:1	2 of 2		
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A3
x,x±0.25 x,xxx±0.20 x,xxx±0.15 ANGLES ±1°				
			A2550-T	