


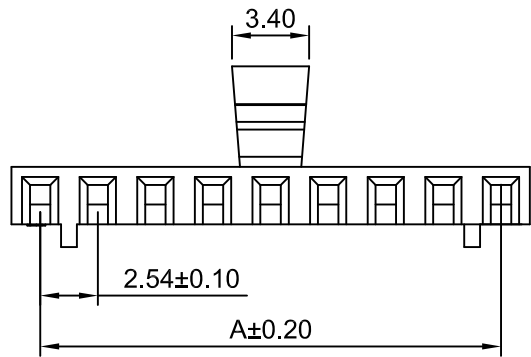



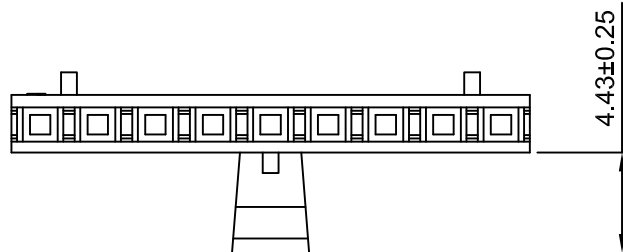




4P~25P

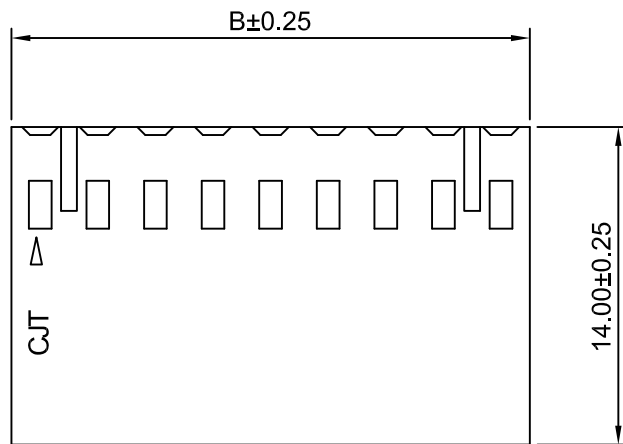

2P



3P

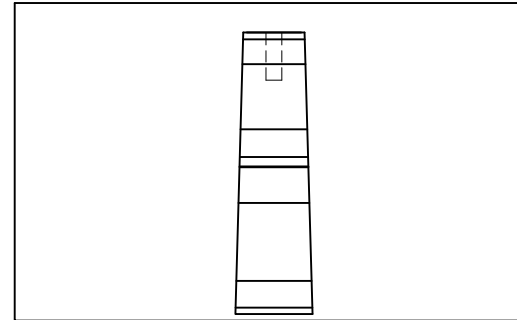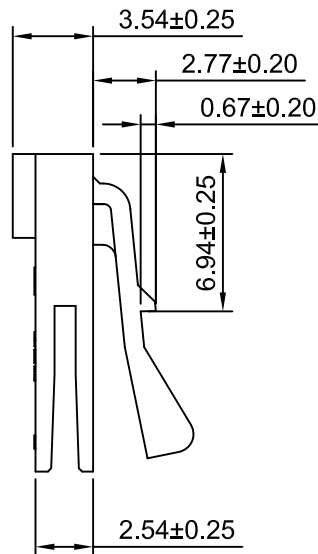

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 300V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 5mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1100V AC/minute
Material: PBT+30%GF,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2550H-2P-A4	2.54	5.08
A2550H-3P-A4	5.08	7.62
A2550H-4P-A4	7.62	10.16
A2550H-5P-A4	10.16	12.70
A2550H-6P-A4	12.70	15.24
A2550H-7P-A4	15.24	17.78
A2550H-8P-A4	17.78	20.32
A2550H-9P-A4	20.32	22.86
A2550H-10P-A4	22.86	25.40
A2550H-11P-A4	25.40	27.94
A2550H-12P-A4	27.94	30.48
A2550H-13P-A4	30.48	33.02
A2550H-14P-A4	33.02	35.56
A2550H-15P-A4	35.56	38.10
A2550H-16P-A4	38.10	40.64
A2550H-17P-A4	40.64	43.18
A2550H-18P-A4	43.18	45.72
A2550H-19P-A4	45.72	48.26
A2550H-20P-A4	48.26	50.80
A2550H-21P-A4	50.80	53.34
A2550H-22P-A4	53.34	55.88
A2550H-23P-A4	55.88	58.42
A2550H-24P-A4	58.42	60.96
A2550H-25P-A4	60.96	63.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	2.54mm PITCH CRIMP FLEX HOUSING	
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A0
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°				
				