


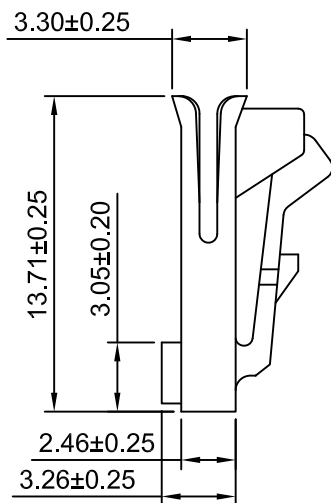
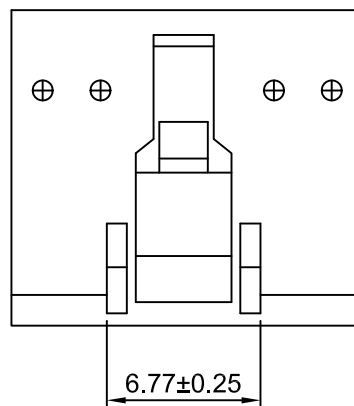
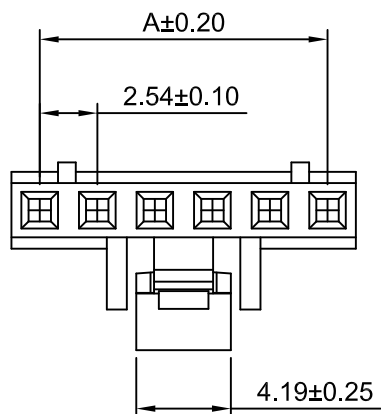
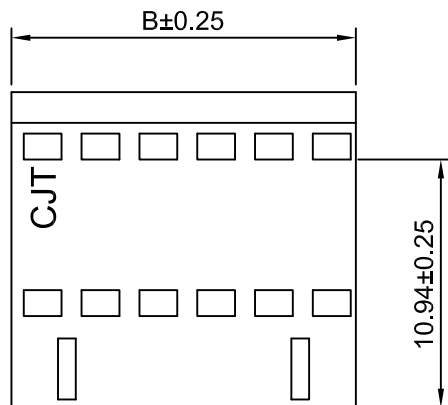






4P~25P



DETAIL FOR 2 POSN ONLY

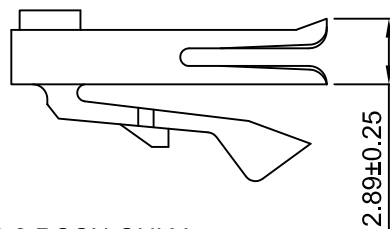

DETAIL FOR 3 POSN ONLY

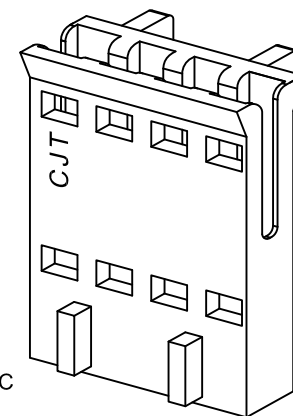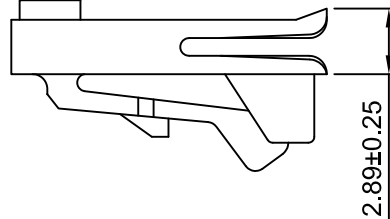

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 300V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 5mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1100V AC/minute
Material: PBT30%GF,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	4.92	14P	33.02	35.40
3P	5.08	7.46	15P	35.56	37.94
4P	7.62	10.00	16P	38.10	40.48
5P	10.16	12.54	17P	40.64	43.02
6P	12.70	15.08	18P	43.18	45.56
7P	15.24	17.62	19P	45.72	48.10
8P	17.78	20.16	20P	48.26	50.64
9P	20.32	22.70	21P	50.80	53.18
10P	22.86	25.24	22P	53.34	55.72
11P	25.40	27.78	23P	55.88	58.26
12P	27.94	30.32	24P	58.42	60.80
13P	30.48	32.86	25P	60.96	63.34

CJT

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	2.54mm PITCH CRIMP FLEX HOUSING	
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x,x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			A2550H-XP-H	A1

A1	MODIFY DRAWING	2021.06.18
A0	NEW RELEASE	2011.05.13
REV	DESCRIPTION	DATE