
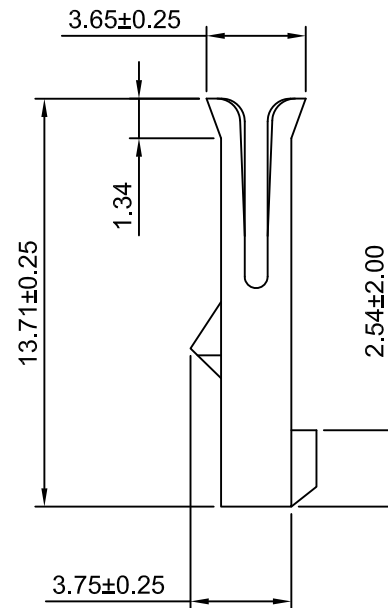


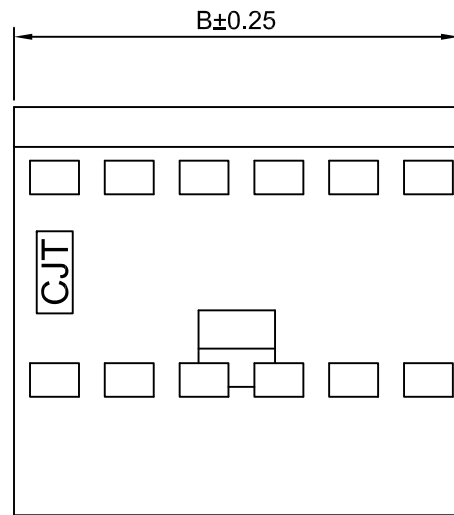




SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 300V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 5mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1100V AC/minute
Material: PBT30%GF,UL94V-0(Black)


Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	4.92	14P	33.02	35.40
3P	5.08	7.46	15P	35.56	38.94
4P	7.62	10.00	16P	38.10	40.48
5P	10.16	12.54	17P	40.64	43.02
6P	12.70	15.08	18P	43.18	45.56
7P	15.24	17.62	19P	45.72	48.10
8P	17.78	20.16	20P	48.26	50.64
9P	20.32	22.70	21P	50.80	53.18
10P	22.86	25.24	22P	53.34	55.72
11P	25.40	27.78	23P	55.88	58.26
12P	27.94	30.32	24P	58.42	60.80
13P	30.48	32.86	25P	60.96	63.34

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	Title : 2.54mm PITCH	
mm	4:1	1 of 1		
Draw BY:		Approved :	Crimp Flex Housing	
Dengchun Yi		Jack Yin		
General Tolerance				
x.x±0.25 x.xx±0.20 x.xxx±0.15		PROJECT 		
DRAW NO :		A2550H-XP-I		
REV		A2		

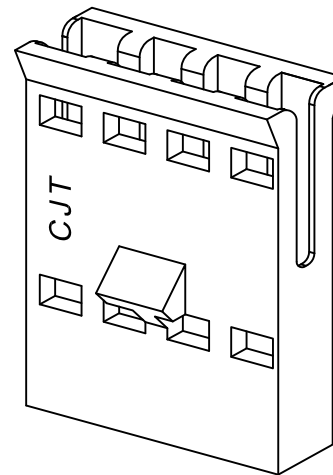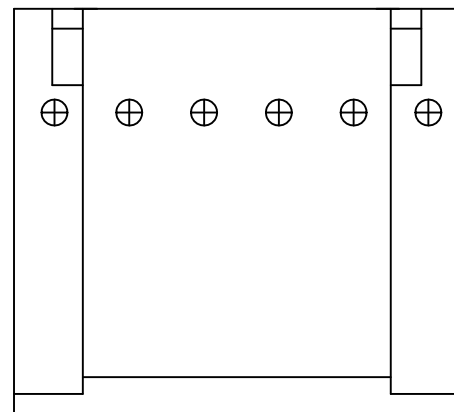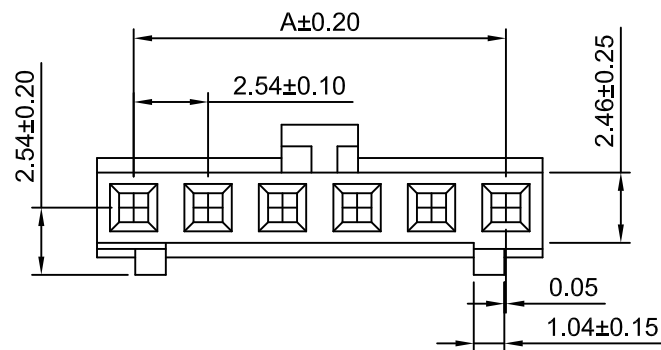

A2	CHANGS THE DRAWING	2019.03.28
A1	NEW RELELEASE	2016.07.15
A0	NEW RELELEASE	2005.07.01
REV	DESCRIPTION	DATE



Title :		2.54mm PITCH	
		Crimp Flex Housing	
DRAW NO :		A2550H-XP-I	REV A2