






4P~25P

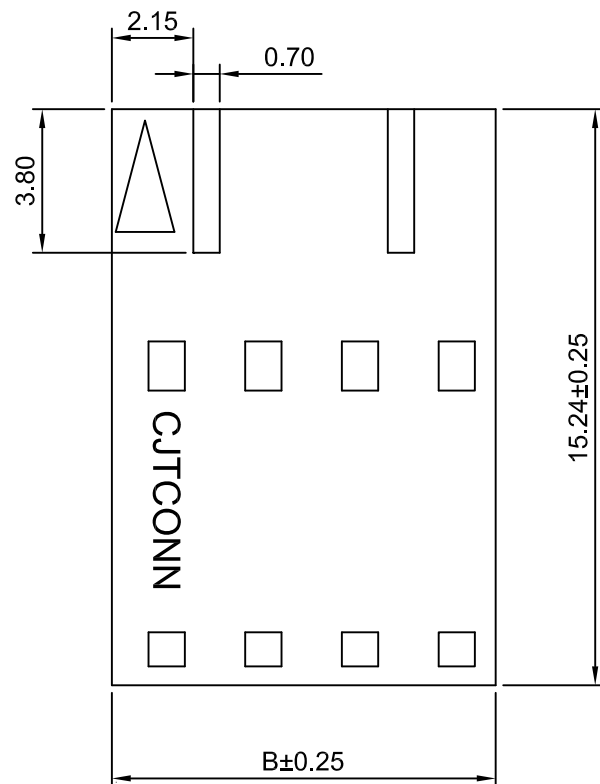

3P



2P

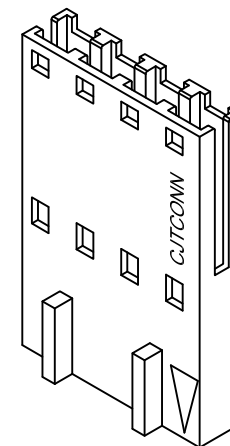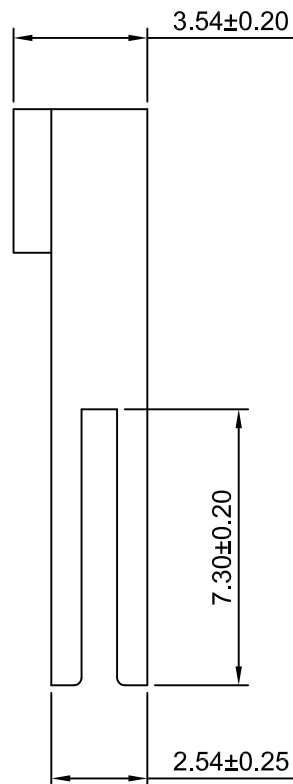

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 300V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 5mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1100V AC/minute
Material: PBT+15%G.F.,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions (mm)		Part NO.	Dimensions (mm)	
	A	B		A	B
A2550H-2P-M2	2.54	5.08	A2550H-14P-M2	33.02	35.56
A2550H-3P-M2	5.08	7.62	A2550H-15P-M2	35.56	38.10
A2550H-4P-M2	7.62	10.16	A2550H-16P-M2	38.10	40.64
A2550H-5P-M2	10.16	12.70	A2550H-17P-M2	40.64	43.18
A2550H-6P-M2	12.70	15.24	A2550H-18P-M2	43.18	45.72
A2550H-7P-M2	15.24	17.78	A2550H-19P-M2	45.72	48.26
A2550H-8P-M2	17.78	20.32	A2550H-20P-M2	48.26	50.80
A2550H-9P-M2	20.32	22.86	A2550H-21P-M2	50.80	53.34
A2550H-10P-M2	22.86	25.40	A2550H-22P-M2	53.34	55.88
A2550H-11P-M2	25.40	27.94	A2550H-23P-M2	55.88	58.42
A2550H-12P-M2	27.94	30.48	A2550H-24P-M2	58.42	60.96
A2550H-13P-M2	30.48	33.02	A2550H-25P-M2	60.96	63.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	5:1	1 of 1	2.54mm PITCH HOUSING	
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x,x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			A2550H-XP-M2	A1

REV	DESCRIPTION	DATE
A1	CHANGE THE DRAWING	2021.03.11
A0	NEW RELEASE	2010.03.31