
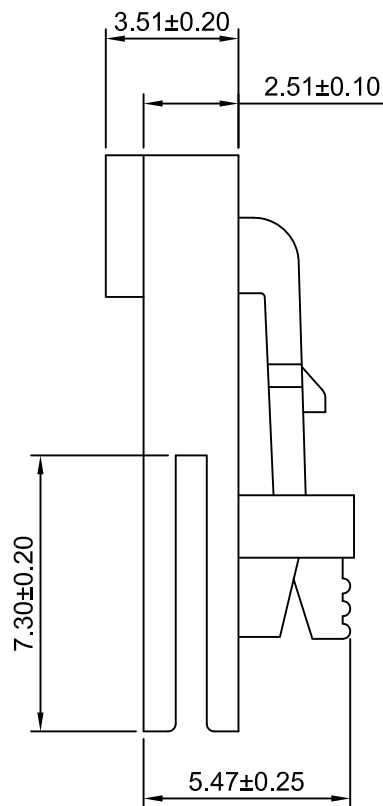
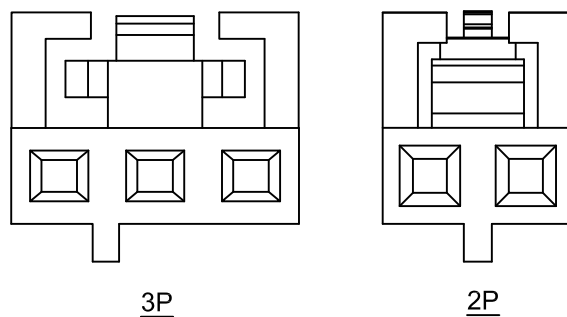


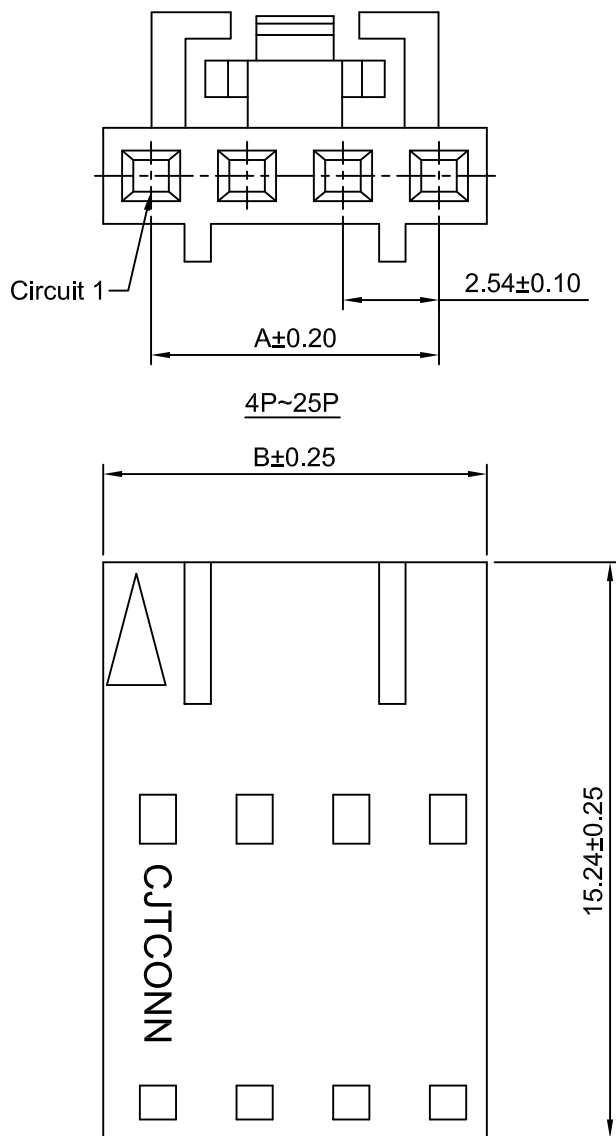

Ordering Information:

A2550H-XP-M - **
1 2

1.Part NO.

2.Material:

(blank): PBT,UL94V-0

GWT: Nylon 66,UL94V-0,
IEC 60335-1,5th Edition
Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 300V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: $5\text{m}\Omega$ Max
Insulation Resistance: $1000\text{M}\Omega$ Min
Withstanding Voltage: 1100V AC/minute
Material: PBT+30%G.F,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2550H-2P-M	2.54	5.08
A2550H-3P-M	5.08	7.62
A2550H-4P-M	7.62	10.16
A2550H-5P-M	10.16	12.70
A2550H-6P-M	12.70	15.24
A2550H-7P-M	15.24	17.78
A2550H-8P-M	17.78	20.32
A2550H-9P-M	20.32	22.86
A2550H-10P-M	22.86	25.40
A2550H-11P-M	25.40	27.94
A2550H-12P-M	27.94	30.48
A2550H-13P-M	30.48	33.02
A2550H-14P-M	33.02	35.56
A2550H-15P-M	35.56	38.10
A2550H-16P-M	38.10	40.64
A2550H-17P-M	40.64	43.18
A2550H-18P-M	43.18	45.72
A2550H-19P-M	45.72	48.26
A2550H-20P-M	48.26	50.80
A2550H-21P-M	50.80	53.34
A2550H-22P-M	53.34	55.88
A2550H-23P-M	55.88	58.42
A2550H-24P-M	58.42	60.96
A2550H-25P-M	60.96	63.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	1:1	1 of 1	2.54mm PITCH CRIMP FLEX HOUSING	
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x,x $\pm$ 0.25 x,x,x $\pm$ 0.20 x,xxx $\pm$ 0.15 ANGLES $\pm 1^{\circ}$			A2550H-XP-M	A1

A1	CHANGE THE DRAWING	2020.07.15
A0	NEW RELEASE	2005.07.01
REV	DESCRIPTION	DATE