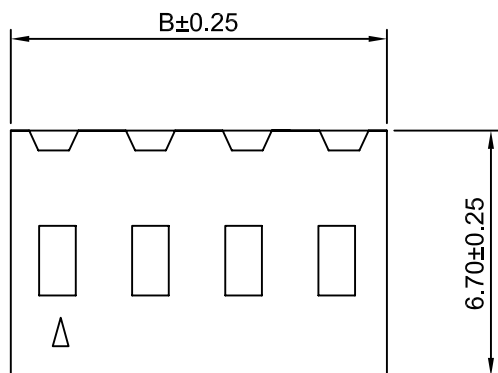
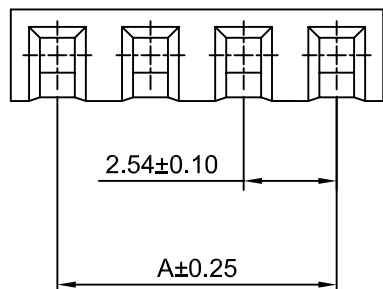


# SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 300V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 5mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1100V AC/minute

Material: PBT30%GF,UL94V-0(Black)

## Ordering Information & Dimensions

| Circuits | Dimensions(mm) |       | Circuits | Dimensions(mm) |       |
|----------|----------------|-------|----------|----------------|-------|
|          | A              | B     |          | A              | B     |
| 2P       | 2.54           | 5.08  | 20P      | 48.26          | 50.80 |
| 3P       | 5.08           | 7.62  | 21P      | 50.80          | 53.34 |
| 4P       | 7.62           | 10.16 | 22P      | 53.34          | 55.88 |
| 5P       | 10.16          | 12.70 | 23P      | 55.88          | 58.42 |
| 6P       | 12.70          | 15.24 | 24P      | 58.42          | 60.96 |
| 7P       | 15.24          | 17.78 | 25P      | 60.96          | 63.50 |
| 8P       | 17.78          | 20.32 | 26P      | 63.50          | 66.04 |
| 9P       | 20.32          | 22.86 | 27P      | 66.04          | 68.58 |
| 10P      | 22.86          | 25.40 | 28P      | 68.58          | 71.12 |
| 11P      | 25.40          | 27.94 | 29P      | 71.12          | 73.66 |
| 12P      | 27.94          | 30.48 | 30P      | 73.66          | 76.20 |
| 13P      | 30.48          | 33.02 | 31P      | 76.20          | 78.74 |
| 14P      | 33.02          | 35.56 | 32P      | 78.74          | 81.28 |
| 15P      | 35.56          | 38.10 | 33P      | 81.28          | 83.82 |
| 16P      | 38.10          | 40.64 | 34P      | 83.82          | 86.36 |
| 17P      | 40.64          | 43.18 | 35P      | 86.36          | 88.90 |
| 18P      | 43.18          | 45.72 | 36P      | 88.90          | 91.44 |
| 19P      | 45.72          | 48.26 |          |                |       |

**CJTconn**

CHANGJIANG CONNECTORS CO.,LTD.

| Unit | Scale | Sheet  |
|------|-------|--------|
| mm   | 5:1   | 1 of 1 |

|          |            |
|----------|------------|
| Draw BY: | Approved : |
| Jack Yin | GONGYB     |

General Tolerance

|            |        |
|------------|--------|
| x.xx±0.25  | ANGLE± |
| x.xx±0.20  |        |
| x.xxx±0.15 |        |

Title :

2.54mm PITCH

Crimp Flex Housing

DRAW NO : A2550HL-XP

REV  
A0

| REV | DESCRIPTION | DATE       |
|-----|-------------|------------|
| A0  | NEW RELEASE | 2015.10.10 |