

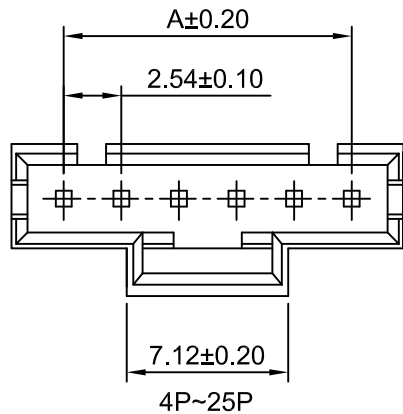


3P



2P



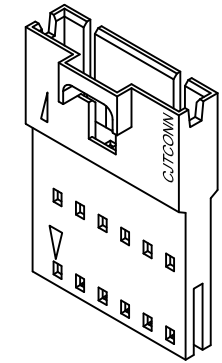


SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 300V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 5mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1100V AC/minute
Material: PBT30%GF,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	7.12	14P	33.02	37.60
3P	5.08	9.66	15P	35.56	40.14
4P	7.62	12.20	16P	38.10	42.68
5P	10.16	14.74	17P	40.64	45.22
6P	12.70	17.28	18P	43.18	47.76
7P	15.24	19.82	19P	45.72	50.30
8P	17.78	22.36	20P	48.26	52.84
9P	20.32	24.90	21P	50.80	55.38
10P	22.86	27.44	22P	53.34	57.92
11P	25.40	29.98	23P	55.88	60.46
12P	27.94	32.52	24P	58.42	63.00
13P	30.48	35.06	25P	60.96	65.54

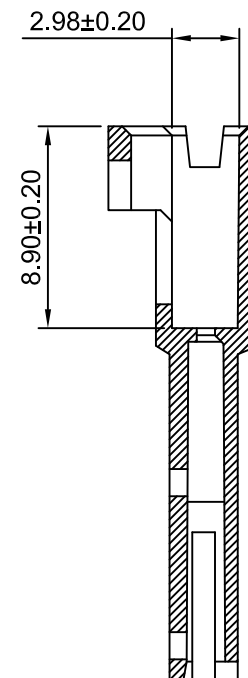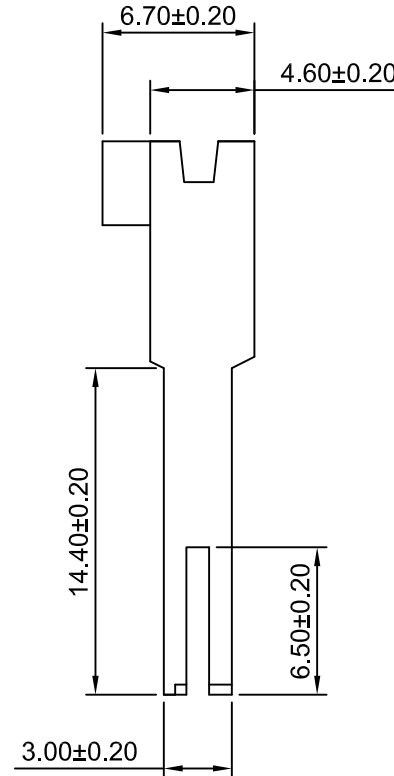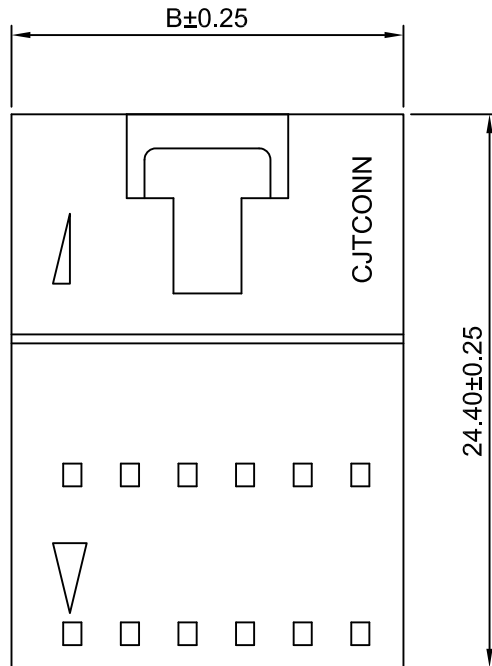

CHANGJIANG CONNECTORS CO.,LTD.

Unit mm	Scale 3:1	Sheet 1 of 1	Title : 2.54mm PITCH CRIMP	
Draw BY: Jack Yin				
General Tolerance			FLEX HOUSING	
x.x≤0.25 x.xx≤0.20 x.xxx≤0.15				
A0	NEW RELEEASE	2005.07.01	DRAW NO : A2550HM-XP	
REV	DESCRIPTION	DATE	REV A0	