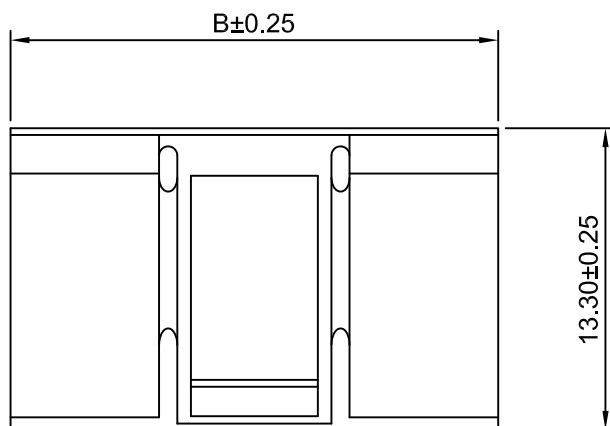
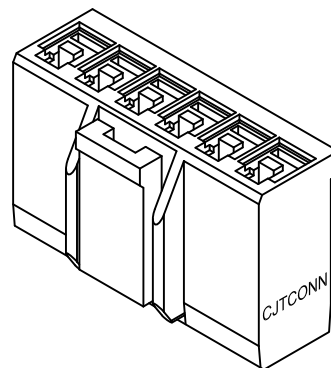
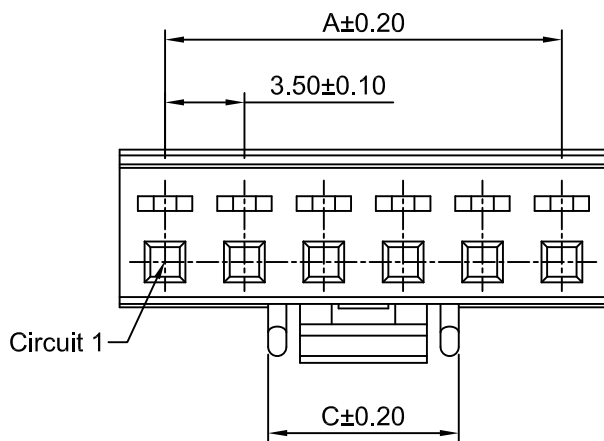


Ordering Information:

A3502H-XP - $\frac{***}{1} - \frac{**}{2} - \frac{**}{3}$

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

PBT: PBT,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,
5th Edition Glow Wire Capable.

3.Color:

(Blank): see section 2 Material

BK:Black BL:Blue

GN:Green RD:Red

YL:Yellow

SPECIFICATIONS:

Current Rating: 5.5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A3502H-2P	3.50	7.50	5.80
A3502H-3P	7.00	11.00	5.80
A3502H-4P	10.50	14.50	8.40
A3502H-5P	14.00	18.00	8.40
A3502H-6P	17.50	21.50	8.40
A3502H-7P	21.00	25.00	8.40
A3502H-8P	24.50	28.50	8.40
A3502H-9P	28.00	32.00	8.40
A3502H-10P	31.50	35.50	8.40
A3502H-11P	35.00	39.00	8.40
A3502H-12P	38.50	42.50	8.40
A3502H-13P	42.00	46.00	8.40
A3502H-14P	45.50	49.50	8.40
A3502H-15P	49.00	53.00	8.40

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	3.50mm PITCH HOUSING	
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°			A3502H-XP	A1
A1	MODIFY DRAWING			
A0	NEW RELEASE			
REV	DESCRIPTION	DATE		