
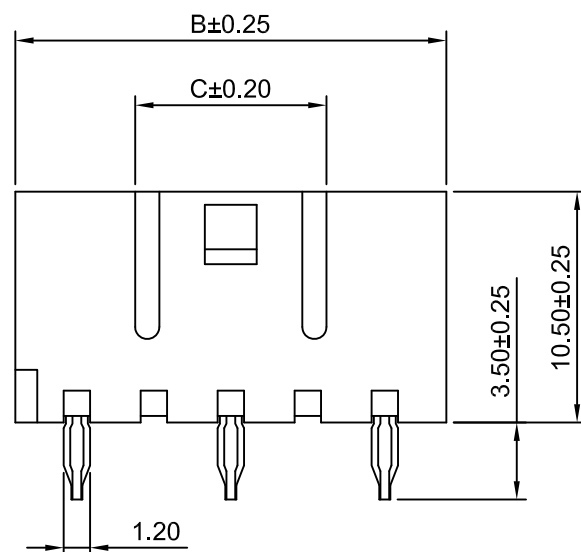
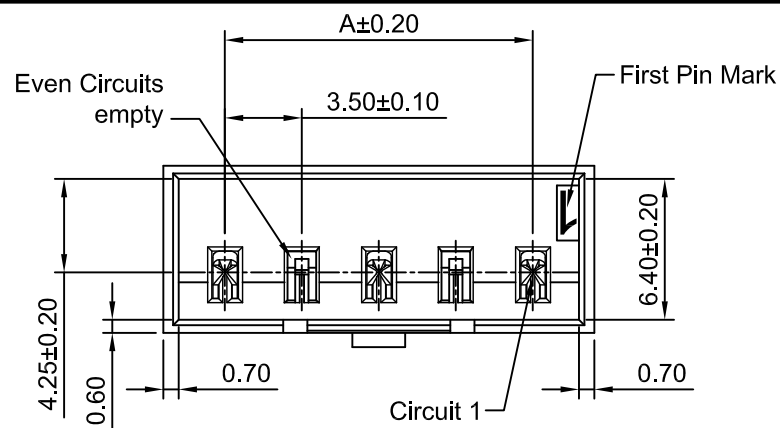


P.C.B LAYOUT
TOLERANCE:±0.05

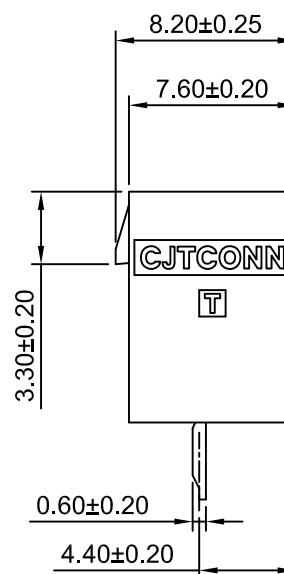

Ordering Information:

A3502WV-XP-A - ^{***}1₂ - ^{**}3₃ - ^{**}4₄

1.Part NO.

2.Material:

(blank): PBT+15%GF,UL94V-0 (White)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

BK:Black RD:Red

YL:Yellow BL:Blue

GN:Green PK:Pink

4.Finish:

(blank):Matte Tin over Nickel

G:Gold over Nickel

SPECIFICATIONS:

Current Rating: 5.5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

Material: PBT+15%GF,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A3502WV-3P-A	7.00	12.60	6.10
A3502WV-5P-A	14.00	19.60	8.70
A3502WV-7P-A	21.00	26.60	8.70
A3502WV-9P-A	28.00	33.60	8.70
A3502WV-11P-A	35.00	40.60	8.70
A3502WV-13P-A	42.00	47.60	8.70
A3502WV-15P-A	49.00	54.60	8.70

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	3:1	1 of 1	3.50mm PITCH 180° WAFER
DRWN	CHK'D	APPR	
Dengchun Yi	Dlankut Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO. A3502WV-XP-A
			REV A1