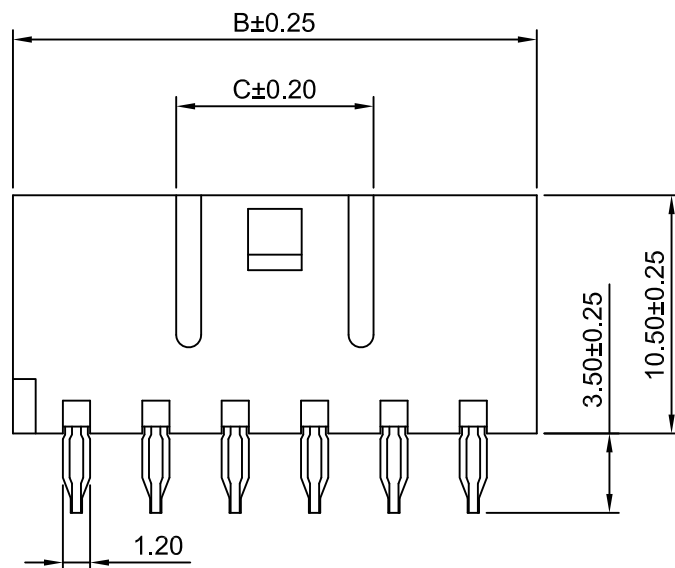
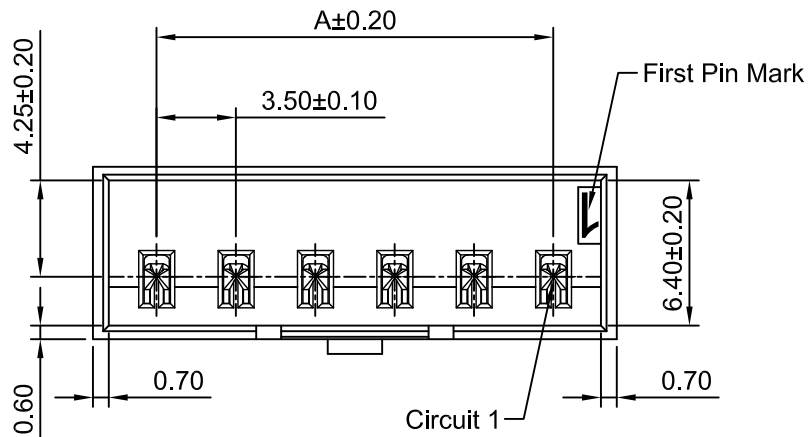


P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:

A3502WV-XP - *** - ** - **
1 2 3 4

1.Part NO.

2.Material:

(blank): PBT+15%GF,UL94V-0 (White)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

BK:Black RD:Red


YL:Yellow BL:Blue

GN:Green PK:Pink

4.Finish:

(blank):Matte Tin over Nickel

G:Gold over Nickel

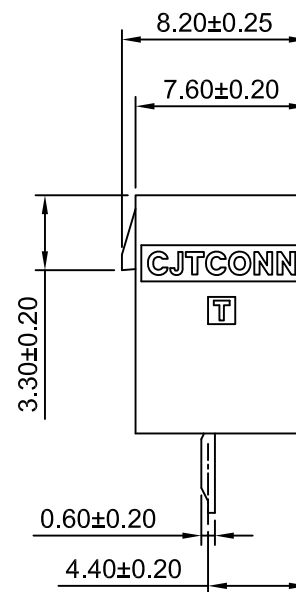

SPECIFICATIONS:

Current Rating: 5.5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

Material: PBT+15%GF,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A3502WV-2P	3.50	9.10	6.10
A3502WV-3P	7.00	12.60	6.10
A3502WV-4P	10.50	16.10	8.70
A3502WV-5P	14.00	19.60	8.70
A3502WV-6P	17.50	23.10	8.70
A3502WV-7P	21.00	26.60	8.70
A3502WV-8P	24.50	30.10	8.70
A3502WV-9P	28.00	33.60	8.70
A3502WV-10P	31.50	37.10	8.70
A3502WV-11P	35.00	40.60	8.70
A3502WV-12P	38.50	44.10	8.70
A3502WV-13P	42.00	47.60	8.70
A3502WV-14P	45.50	51.10	8.70
A3502WV-15P	49.00	54.60	8.70

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	3.50mm PITCH 180° WAFER	
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	DRAWING NO.
A1	CHANGE THE DRAWING	2020.08.13		A3502WV-XP
A0	NEW RELEASE	2005.05.10		
REV	DESCRIPTION	DATE		
x,x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°				REV A1