

Ordering Information:

A3961H-XP - $\frac{*}{1}$ - $\frac{***}{2}$ - $\frac{**}{3}$ - $\frac{**}{4}$

1.Part NO.

2.Style:

(Blank): Type 1

2: Type 2

3: Type 3

3.Material:

(Blank): Nylon 66,UL94V-2(Natural).Just for Type 1 & Type 2.

V0: Nylon 66,UL94V-0(White)





GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition

Glow Wire Capable.



4.Color:

(Blank): See section 3 Material.



BK: Black

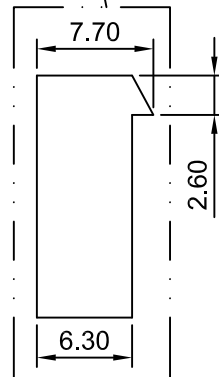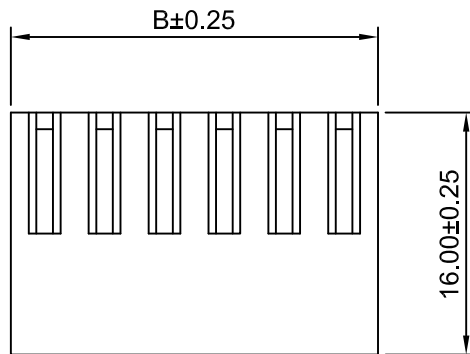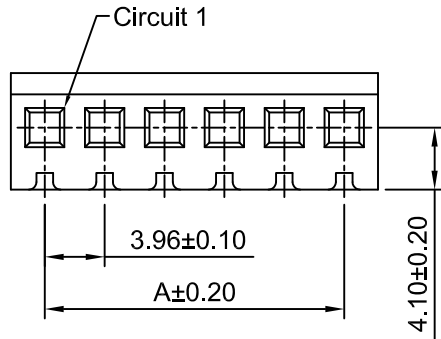

TYPE 1

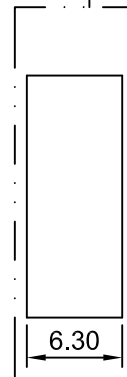

TYPE 2

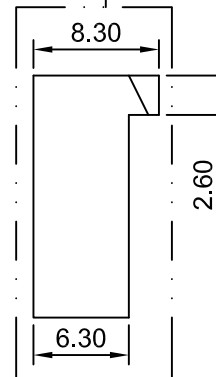

TYPE 3

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A3961H-2P	3.96	8.43
A3961H-3P	7.92	12.39
A3961H-4P	11.88	16.35
A3961H-5P	15.84	20.31
A3961H-6P	19.80	24.27
A3961H-7P	23.76	28.23
A3961H-8P	27.72	32.19
A3961H-9P	31.68	36.15
A3961H-10P	35.64	40.11
A3961H-11P	39.60	44.07
A3961H-12P	43.56	48.03
A3961H-13P	47.52	51.99
A3961H-14P	51.48	55.95
A3961H-15P	55.44	59.91
A3961H-16P	59.40	63.87
A3961H-17P	63.36	67.83
A3961H-18P	67.32	71.79
A3961H-19P	71.28	75.75
A3961H-20P	75.24	79.71
A3961H-21P	79.20	83.67
A3961H-22P	83.16	87.63
A3961H-23P	87.12	91.59
A3961H-24P	91.08	95.55

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	3.96mm PITCH HOUSING	
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°				
			A3961H-XP	