
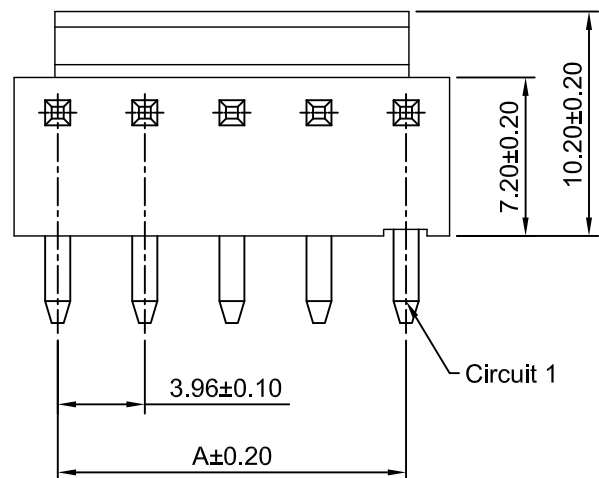
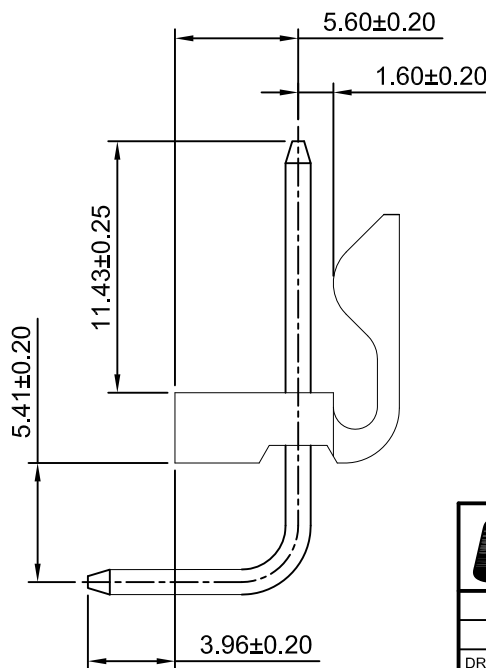


P.C.B LAYOUT

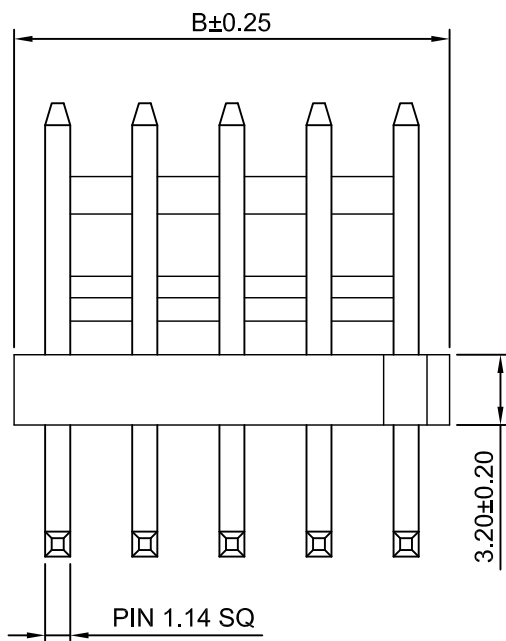

SPECIFICATIONS:

Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	7.92	14P	51.48	55.44
3P	7.92	11.88	15P	55.44	59.40
4P	11.88	15.84	16P	59.40	63.36
5P	15.84	19.80	17P	63.36	67.32
6P	19.80	23.76	18P	67.32	71.28
7P	23.76	27.72	19P	71.28	75.24
8P	27.72	31.68	20P	75.24	79.20
9P	31.68	35.64	21P	79.20	83.16
10P	35.64	39.60	22P	83.16	87.12
11P	39.60	43.56	23P	87.12	91.08
12P	43.56	47.52	24P	91.08	95.04
13P	47.52	51.48			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	2.5:1	1 of 1	3.96mm PITCH		
DRWN	CHK'D	APPR	RIGHT-ANGLE WAFER		
Chengbiao Ye	DianKui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			A3961WRB-XP		A1

A1	CHANGE THE DRAWING	2023.03.02
A0	NEW RELEASE	2014.06.25
REV	DESCRIPTION	DATE