
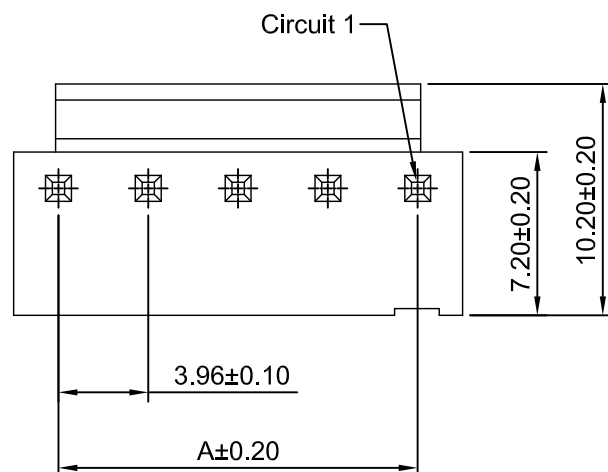
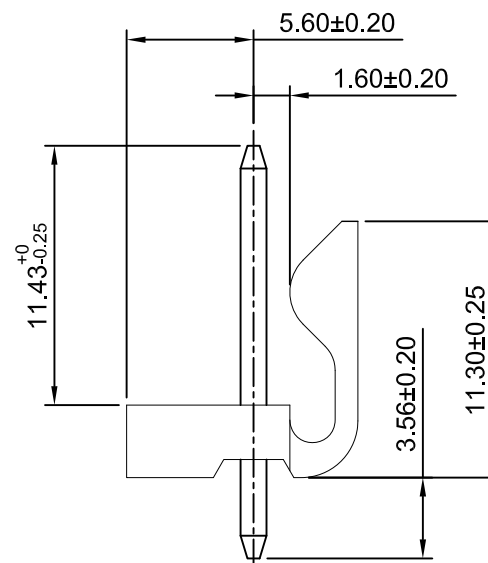


SPECIFICATIONS:

Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	7.92	12P	43.56	47.52
3P	7.92	11.88	13P	47.52	51.48
4P	11.88	15.84	14P	51.48	55.44
5P	15.84	19.80	15P	55.44	59.40
6P	19.80	23.76	16P	59.40	63.36
7P	23.76	27.72	17P	63.36	67.32
8P	27.72	31.68	18P	67.32	71.28
9P	31.68	35.64	19P	71.28	75.24
10P	35.64	39.60	20P	75.24	79.20
11P	39.60	43.56			

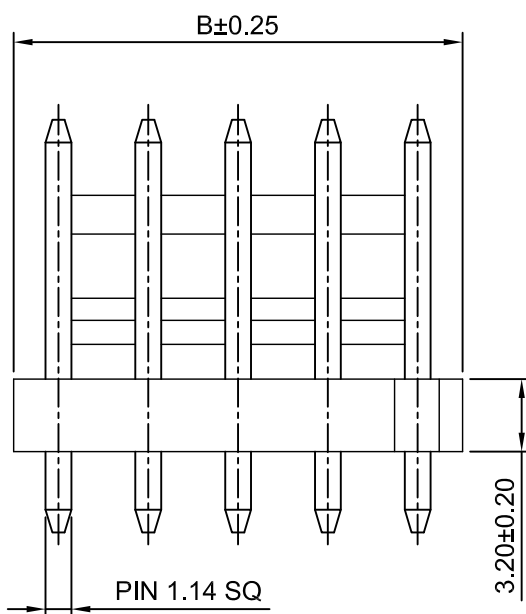

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1

Draw By: Diankui Wan
Approved: Jack Yin

Title :		3.96mm PITCH
		180° WAFER
Draw NO :	A3961WVB-XP	REV A1

General Tolerance		
A1	ADD THE INFORMATION OF FIRST PIN	2020.05.25
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE

x.x±0.25	PROJECT
x.xx±0.20	
x.xxx±0.15	