
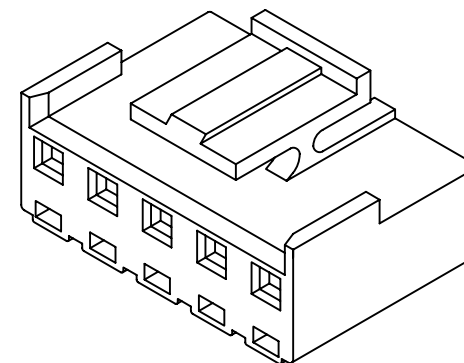


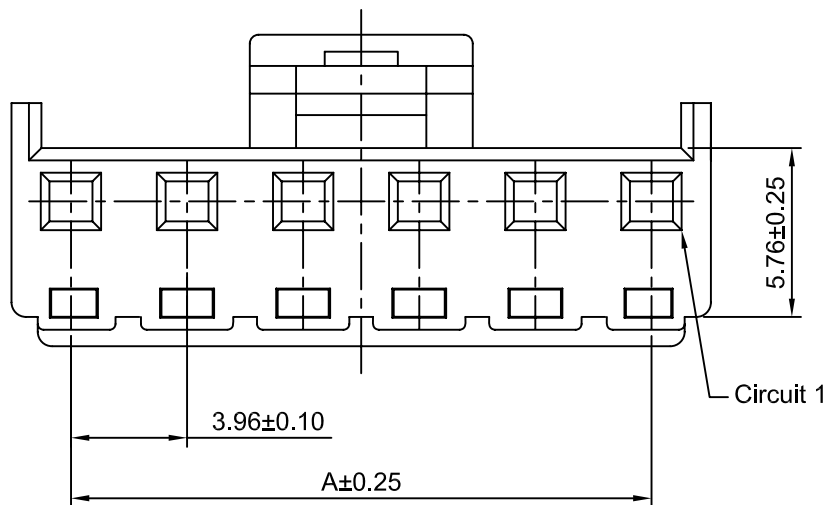

SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max



Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	8.02	9P	31.68	35.74
3P	7.92	11.98	10P	35.64	39.70
4P	11.88	15.94	11P	39.60	43.66
5P	15.84	19.90	12P	43.56	47.62
6P	19.80	23.86	13P	47.52	51.58
7P	23.76	27.82	14P	51.48	55.54
8P	27.72	31.78	15P	55.44	59.50

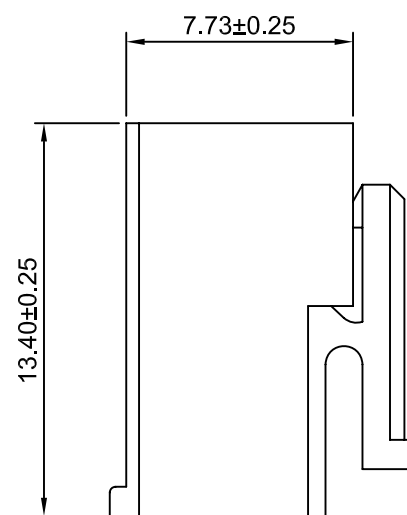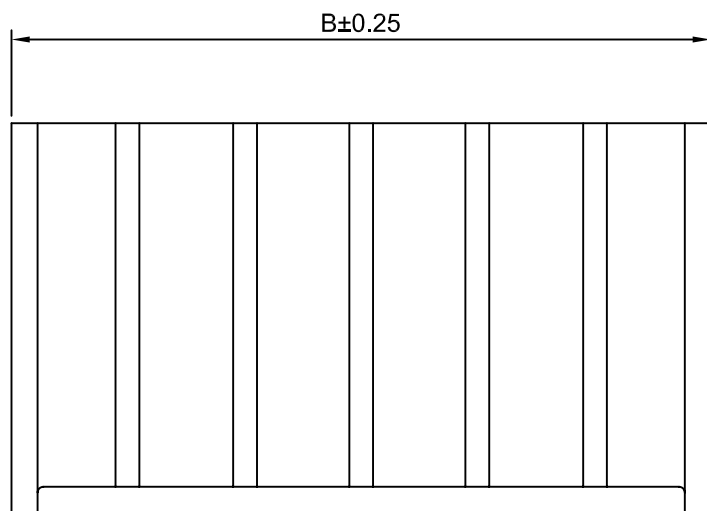

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1

Draw BY:	Approved :
LIZQ	GONGYB

General Tolerance

x.x±0.25	ANGLE±
x.xx±0.20	
x.xx±0.15	

Title :
3.96mm PITCH
HOUSING

DRAW NO : A3963HA-XP	REV A0
-----------------------------	-----------

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2005.05.10