
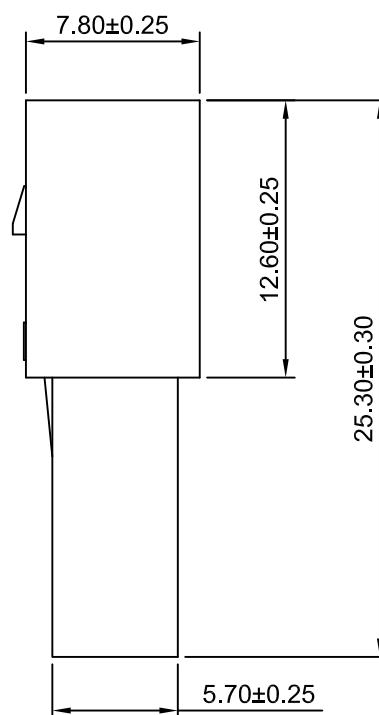
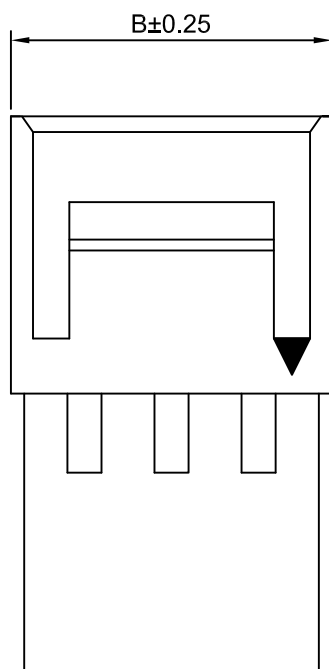
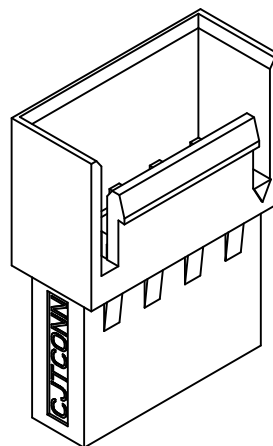


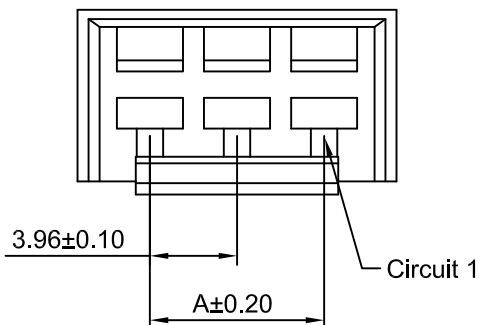

Ordering Information:

A3963HM-XP - $\frac{**}{1} - \frac{**}{2} \frac{**}{3}$

1.Part No.

2.Material:

(Blank):Nylon 66,UL94V-0(White)

GWT:Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank);see section 2 material

RD:Red BL:Blue

YL:Yellow BK:Black

GN:Green

SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	10.64	9P	31.68	38.36
3P	7.92	14.60	10P	35.64	42.32
4P	11.88	18.56	11P	39.60	46.28
5P	15.84	22.52	12P	43.56	50.24
6P	19.80	26.48	13P	47.52	54.20
7P	23.76	30.44	14P	51.48	58.16
8P	27.72	34.40	15P	55.44	62.12

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRAWN	CHK'D	APPR	3.96mm PITCH	
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	HOUSING	
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°				
			DRAWING NO.	REV
			A3963HM-XP	A2

REV	DESCRIPTION	DATE
A2	CHANGE THE DRAWING	2023.02.21
A1	CHANGE THE DRAWING	2018.11.19
A0	NEW RELEASE	2016.08.26