

Ordering Information:

A3963HMA-XP - ** - **
1 2 3

1.Part No.

2.Material:

(Blank):Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.





3.Color:

(Blank):see section 2 material

RD:Red BL:Blue

YL:Yellow BK:Black

GN:Green

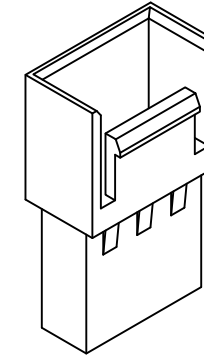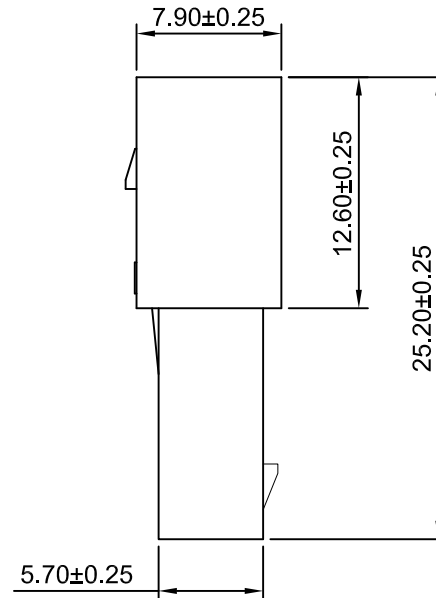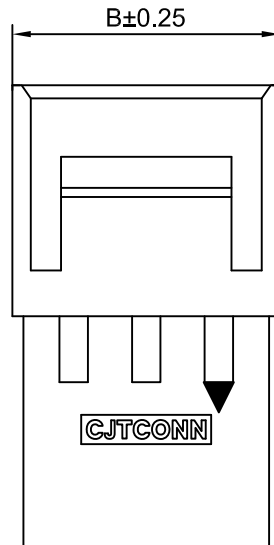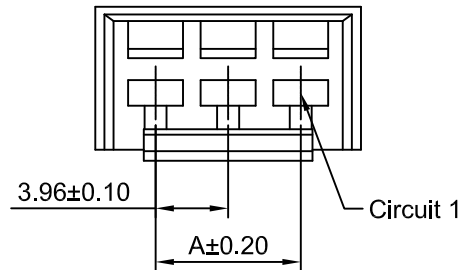

SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max




Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	3.96	10.64	---	9P	31.68	38.36	31.20
3P	7.92	14.60	7.44	10P	35.64	42.32	35.16
4P	11.88	18.56	11.40	11P	39.60	46.28	39.12
5P	15.84	22.52	15.36	12P	43.56	50.24	43.08
6P	19.80	26.48	19.32	13P	47.52	54.20	47.04
7P	23.76	30.44	23.28	14P	51.48	58.16	51.00
8P	27.72	34.40	27.24	15P	55.44	62.12	54.96

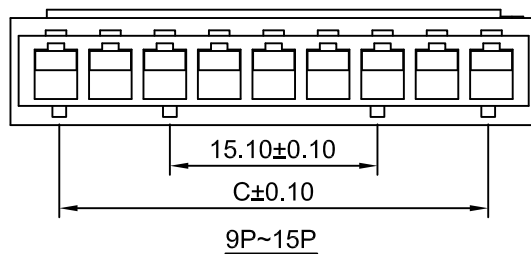

A1	CHANGE THE DRAWING	2023.02.21
A0	NEW RELEASE	2016.08.26
REV	DESCRIPTION	DATE

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	2.5:1	1 of 1			
DRAWN	CHK'D	APPR	3.96mm PITCH		
Haisen Li	Djankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	HOUSING		DRAWING NO.
x,xx±0.25 x,xx±0.20 x,xxx±0.15 ANGLES ±1°					
			A3963HMA-XP		REV A1