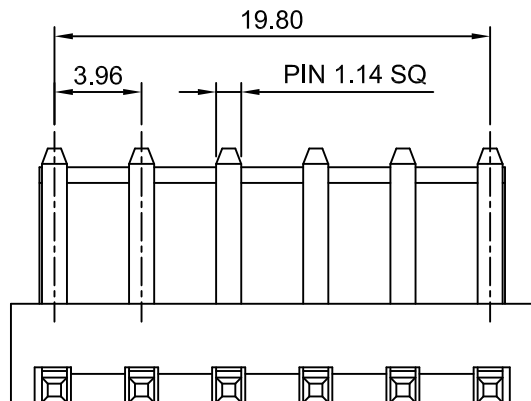
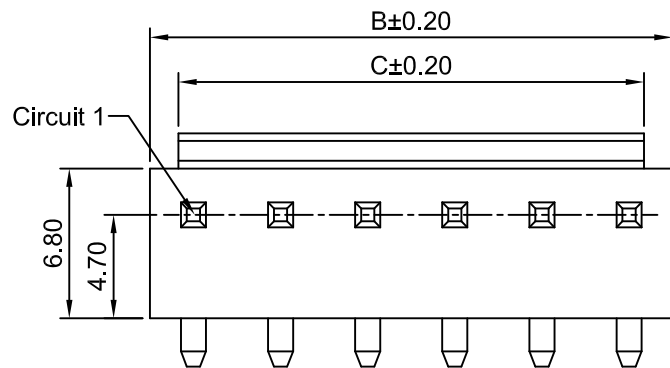


P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:

A3963WR-XP-P-LCP - *** - ***
1 2 3

1.Part No.

2.Finish:

(Blank): Tin over Nickel

G:Gold over Nickel (Au:1u")

G3: Gold over Nickel(Au:3u")



G15: Gold over Nickel(Au:15u",Mating Area)

G30: Gold over Nickel(Au:30u",Mating Area)

3.Packing:

(Blank): Bag

RE: Tape & Reel

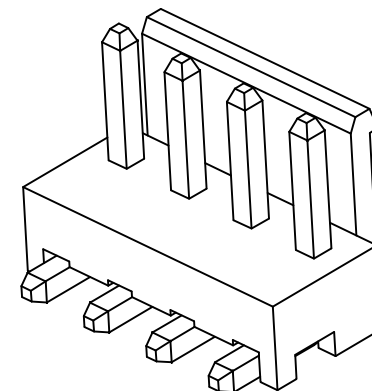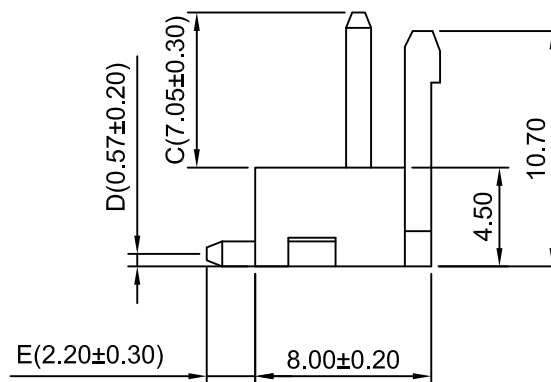

SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

Material: LCP,UL94V-0(Beige)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A3963WR-2P-P-LCP	3.96	7.92	5.32
A3963WR-3P-P-LCP	7.92	11.88	9.28
A3963WR-4P-P-LCP	11.88	15.84	13.24
A3963WR-5P-P-LCP	15.84	19.80	17.20
A3963WR-6P-P-LCP	19.80	23.76	21.16
A3963WR-7P-P-LCP	23.76	27.72	25.12
A3963WR-8P-P-LCP	27.72	31.68	29.08

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRWN	CHK'D	APPR	3.96mm PITCH RIGHT-ANGLE WAFER	
Wenmin Luo	DianKui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			A3963WR-XP-P-LCP	A0

A0	NEW RELEASE	2020.10.12
REV	DESCRIPTION	DATE