
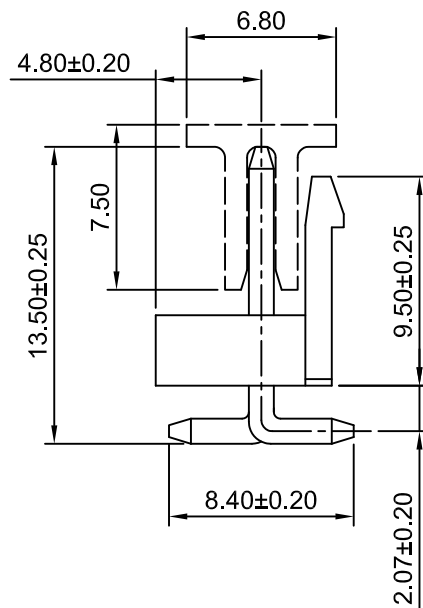


P.C.B LAYOUT

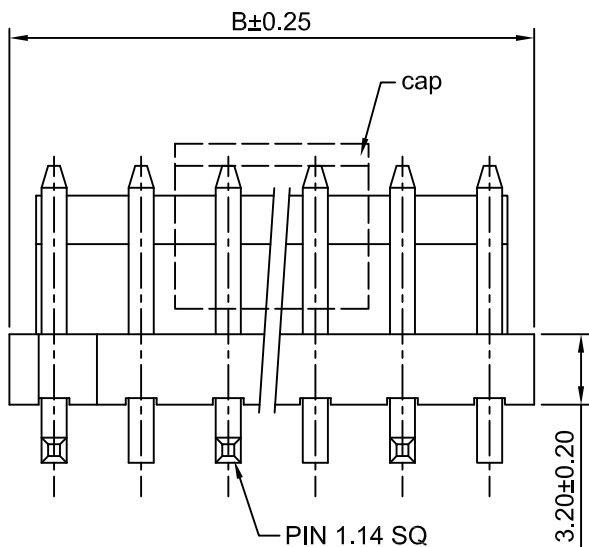

Ordering Information:

A3963WV-S-XP - ^{**}/₁ - ^{***}/₂ - ^{***}/₃ - ^{***}/₄

- 1.Part No.
- 2.Material:
(Blank):Nylon 6T,UL94V-0
GWT:Nylon 6T,UL94V-0,GWT 750°
- 3.Color:
(Blank):White
BK:Black
BL:Blue
RD:Red
- 4.Finish:
(Blank):Tin over Nickel
G:Gold over Nickel

SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 6T,UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	7.92	9P	31.68	35.64
3P	7.92	11.88	10P	35.64	39.60
4P	11.88	15.84	11P	39.60	43.56
5P	15.84	19.80	12P	43.56	47.52
6P	19.80	23.76	13P	47.52	51.48
7P	23.76	27.72	14P	51.48	55.44
8P	27.72	31.68	15P	55.44	59.40



CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1

Title :

3.96mm Pitch

Draw By:	Approved :
Dlankul Wan	Jack Yin

180° Wafer - SMT Type

General Tolerance

A1	CHANG THE MATERIAL	2019.01.18	x.xx±0.25	PROJECT
A0	NEW RELEASE	2019.01.11	x.xx±0.20	
REV	DESCRIPTION	DATE	x.xxx±0.15	

DRAW NO : A3963WV-S-XP

REV A1