


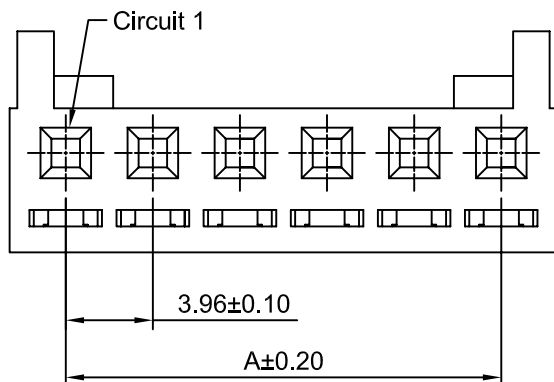

Ordering Information:

A3964H-XP-B - ^{***}/₂ - ^{**}/₃

1.Part No.

2.Material:




(blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750°C

3.Color:

(blank):White

BK:Black

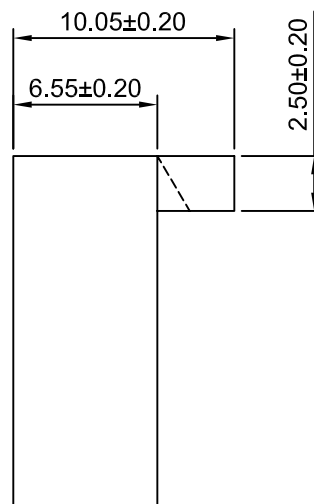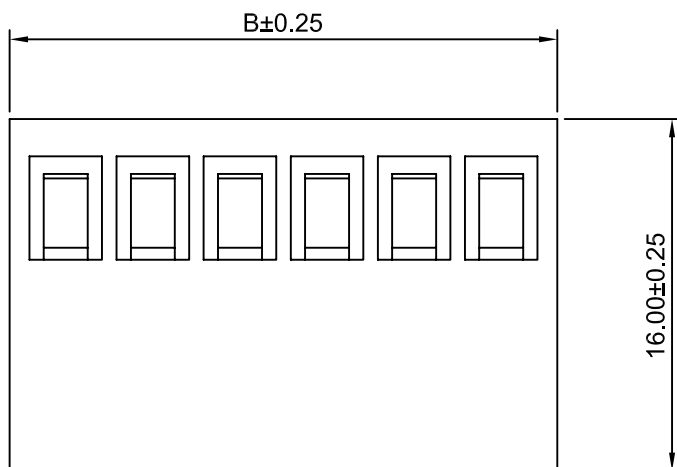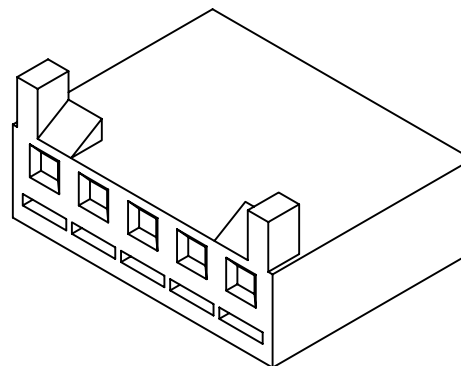

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	9.06	14P	51.48	56.58
3P	7.92	13.02	15P	55.44	60.54
4P	11.88	16.98	16P	59.40	64.50
5P	15.84	20.94	17P	63.36	68.46
6P	19.80	24.90	18P	67.32	72.42
7P	23.76	28.86	19P	71.28	76.38
8P	27.72	32.82	20P	75.24	80.34
9P	31.68	36.78	21P	79.20	84.30
10P	35.64	40.74	22P	83.16	88.26
11P	39.60	44.70	23P	87.12	92.22
12P	43.56	48.66	24P	91.08	96.18
13P	47.52	52.62			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1

Draw BY:	Approved :
Tony Su	Jack Yin

General Tolerance

x.x±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	

Title :	
3.96mm PITCH	
HOUSING	
DRAW NO :	REV
A3964H-XP-B	A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2005.05.10