
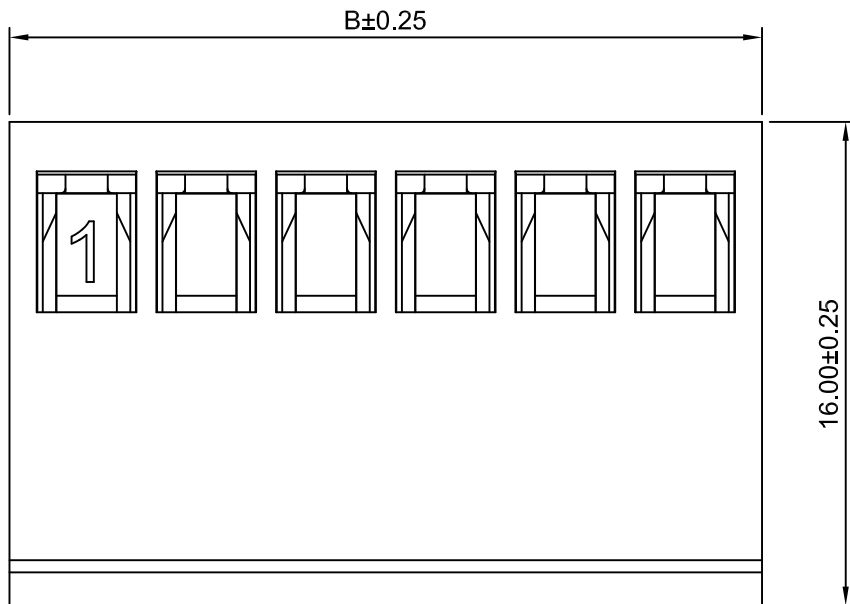


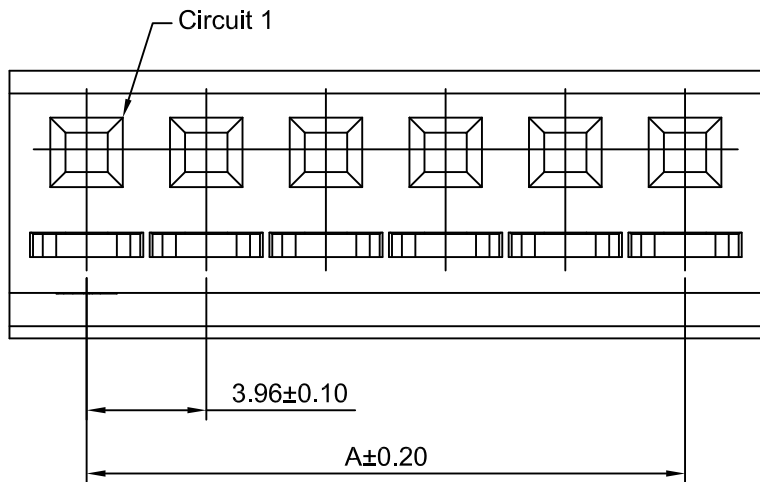

Ordering Information:

A3964H-XP - ***
1 2


1.Part No.

2.Material:

(blank) - Nylon 66,UL94V-2

V0 - Nylon 66,UL94V-0

GWT - Nylon 66,UL94V-0,GWT 750 °C

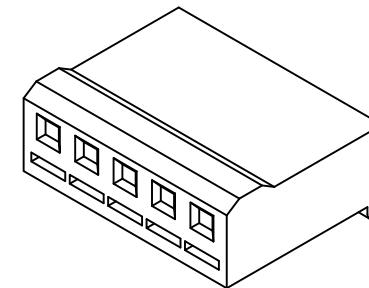

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max


Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)	
	A	B
A3964H-2P	3.96	9.06
A3964H-3P	7.92	13.02
A3964H-4P	11.88	16.98
A3964H-5P	15.84	20.94
A3964H-6P	19.80	24.90
A3964H-7P	23.76	28.86
A3964H-8P	27.72	32.82
A3964H-9P	31.68	36.78
A3964H-10P	35.64	40.74
A3964H-11P	39.60	44.70
A3964H-12P	43.56	48.66

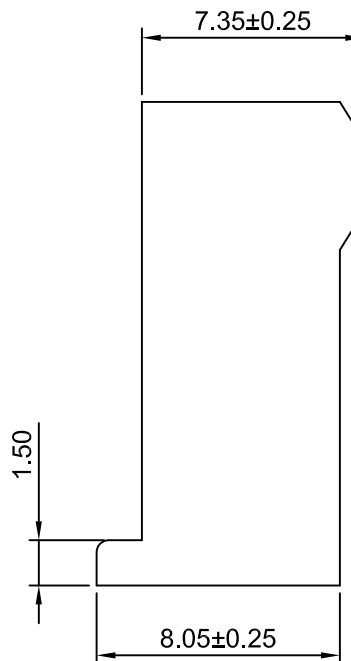

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.		
Unit	Scale	Sheet	Title :		
mm	4:1	1 of 1			
Draw By:		Approved :		3.96mm PITCH	
Diankui Wan		Jack Yin			
General Tolerance			HOUSING		
PROJECT					
x.x±0.25 x.xx±0.20 x.xxx±0.15					
			DRAW NO : A3964H-XP		REV A2