

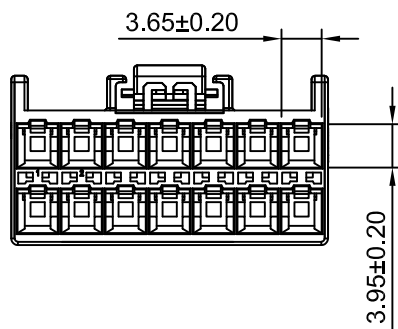
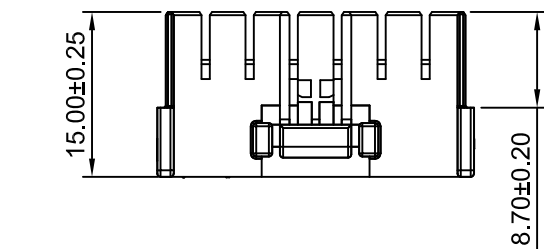
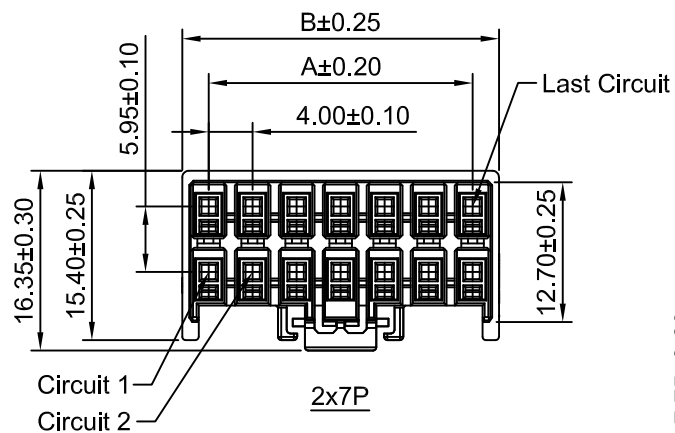



2x3P




2x4P



2x5P



2x6P

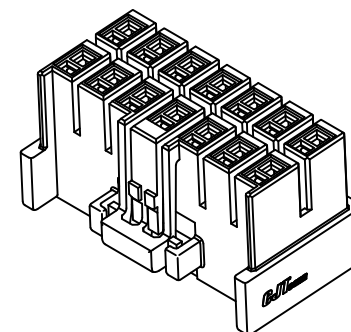

SPECIFICATIONS:

Current Rating: 12A AC,DC
Voltage Rating: 300V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: $20\text{m}\Omega$ Max.
Insulation Resistance: $1000\text{M}\Omega$ Min.
Withstanding Voltage: 1500V AC/minute
Material: PBT,UL94V-0(Blue)

Ordering Information & Dimensions

Circuits	Dimensions (mm)	
	A	B
A4001HG-2x3P	8.00	12.80
A4001HG-2x4P	12.00	16.80
A4001HG-2x5P	16.00	20.80
A4001HG-2x6P	20.00	24.80
A4001HG-2x7P	24.00	28.80

CJTconn CHANGJIANG CONNECTORS CO.,LTD.				
Unit	Scale	Sheet	TITLE 4.00mm PITCH HOUSING	
mm	1.5:1	1 of 1		
DRWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A4001HG-2xXP	REV A0
x.xx±0.25				
x.xx±0.20				
x.xxx±0.15				
ANGLES ±1°				