
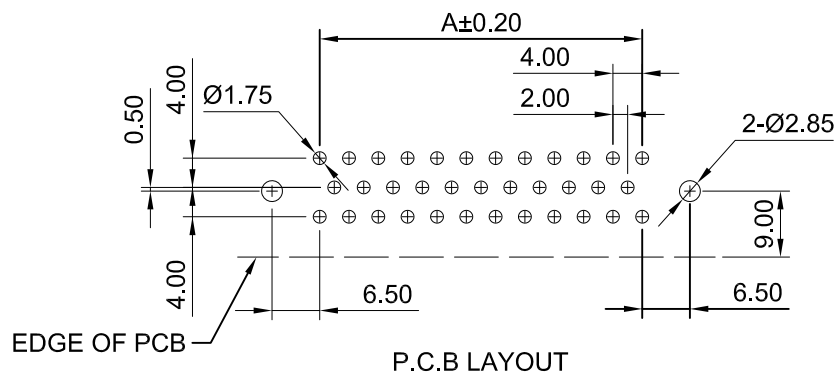


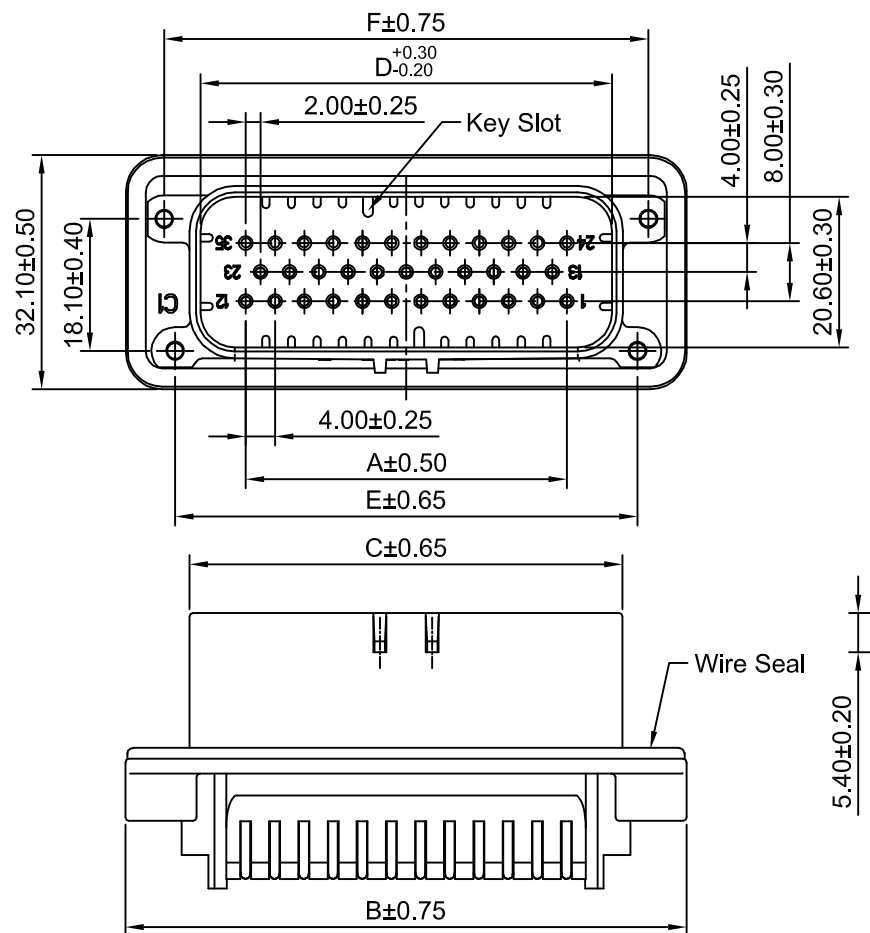

SPECIFICATIONS:

Current Rating: 10A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 2000V AC/minute
Pin Material: Brass/Tin over Nickel
Housing Material: PBT,UL94V-0(Black)
Wire Seal:Wacker glue

Ordering Information & Dimensions

Circuits	Dimensions (mm)					
	A	B	C	D	E	F
A4001WRE-23P	28.00	60.80	43.40	40.40	47.40	50.40
A4001WRE-35P	44.00	76.90	59.40	56.40	63.40	66.40

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	1.5:1	1 of 1	4.00mm Pitch Header
DRWN	CHK'D	APPR	Assembly,R/A Type
Wenmin Luo	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°			
A1	CHANGE THE DRAWING	2022.05.17	DRAWING NO. A4001WRE-XP
A0	NEW RELEASE	2016.05.10	
REV	DESCRIPTION	DATE	
			REV A1