
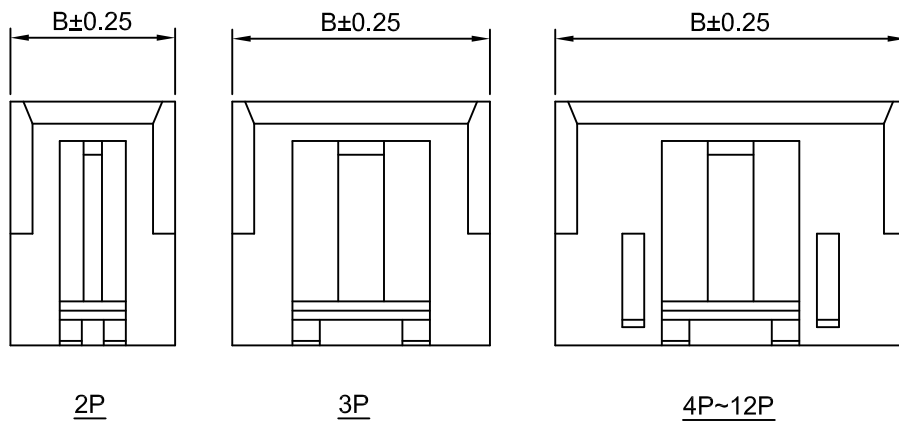


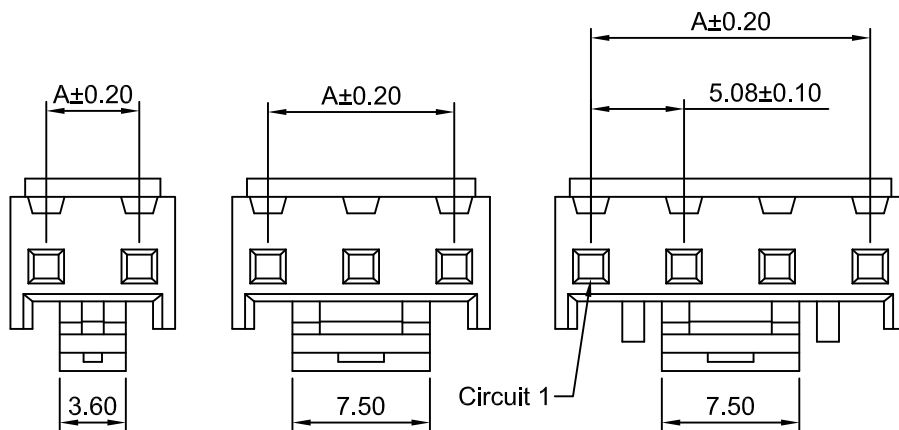

Ordering Information:

A5001HA-XP - *** - ***
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.


3.Color:

(Blank): White

BK: Black BL: Blue

RD: Red GN: Green

YL: Yellow



SPECIFICATIONS:

Current Rating: 10A AC,DC (Max.)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C


Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A5001HA-2P	5.08	8.98
A5001HA-3P	10.16	14.06
A5001HA-4P	15.24	19.14
A5001HA-5P	20.32	24.22
A5001HA-6P	25.40	29.30
A5001HA-7P	30.48	34.38
A5001HA-8P	35.56	39.46
A5001HA-9P	40.64	44.54
A5001HA-10P	45.72	49.62
A5001HA-11P	50.80	54.70
A5001HA-12P	55.88	59.78

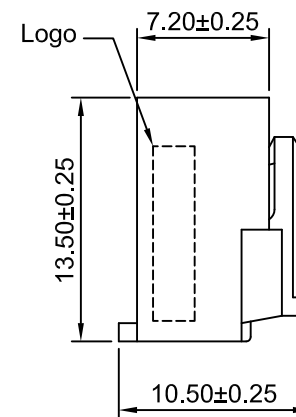

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit mm Scale 2.5:1 Sheet 1 of 1

DRAWN Haisen Li CHK'D Dianshui Wan APPR Jack Yin

General Tolerances

x.xx±0.25
x.xxx±0.20
x.xxxx±0.15
ANGLES ±1°

THIRD ANGLE PROJECTION



TITLE

5.08mm PITCH
HOUSING

DRAWING NO. A5001HA-XP REV A3

A3	MODIFY DRAWING	2022.09.14
A2	CHANGE THE DRAWING	2021.11.11
A1	CHANGE THE DRAWING	2020.05.13
A0	NEW RELEASE	2018.01.16
REV	DESCRIPTION	DATE