

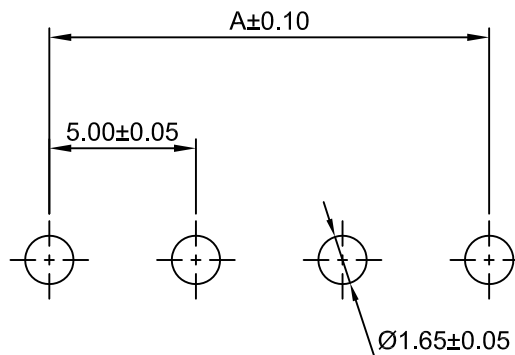
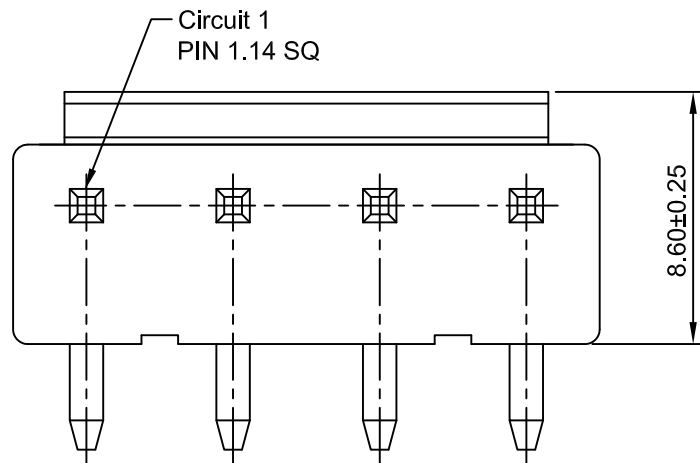


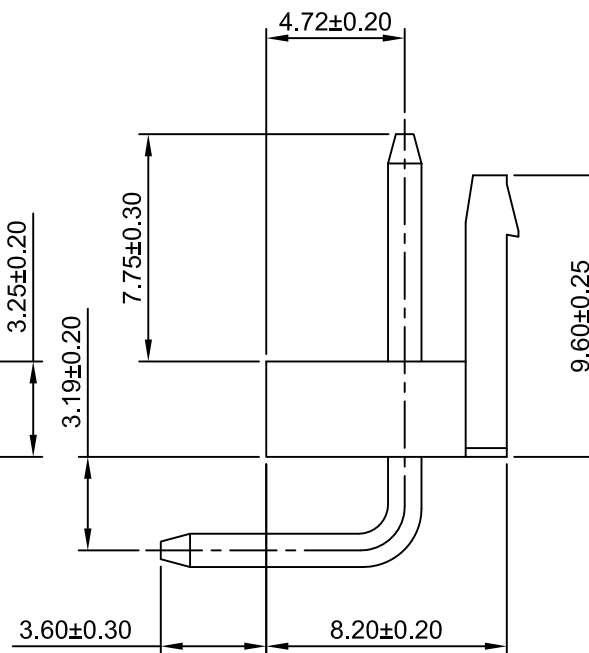

P.C.B LAYOUT

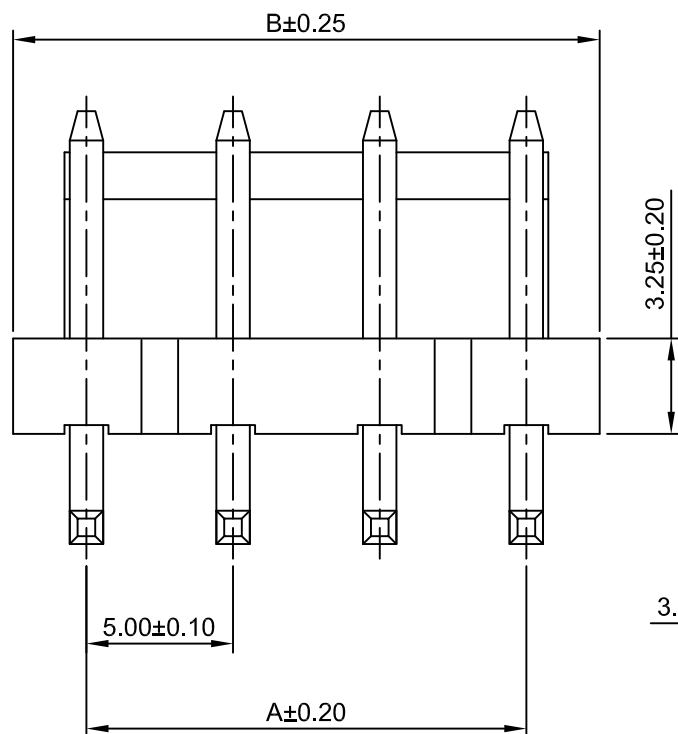

Ordering Information:

A5001WRA-XP - ***
1 2

1.Part No.

2.Material:

(blank):Nylon 66, UL94V-0

GWT:Nylon 66, UL94V-0,GWT 750°C

3.Finish:

(blank):Tin over Nickel

G:Gold over Nickel

SPECIFICATIONS:

Current Rating: 10A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin Over Nickel

Material:Nylon 66, UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	5.00	10.00	10P	45.00	50.00
3P	10.00	15.00	11P	50.00	55.00
4P	15.00	20.00	12P	55.00	60.00
5P	20.00	25.00	13P	60.00	65.00
6P	25.00	30.00	14P	65.00	70.00
7P	30.00	35.00	15P	70.00	75.00
8P	35.00	40.00	16P	75.00	80.00
9P	40.00	45.00			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm, Scale: 4:1, Sheet: 1 of 1

Draw By: Dianskul Wan, Approved: Jack Yin

Title:

5.00mm Pitch

180° Singel Row Pin Header

DRAW NO: A5001WRA-XP

REV A2

REV	DESCRIPTION	DATE	General Tolerance	PROJECT
A2	CHANGE THE CURRENT	2020.04.02	x.xx±0.25 x.xxx±0.15	PROJECT
A1	CHANGE THE SIZE	2019.06.24		
A0	NEW RELEASE	2018.09.28		