

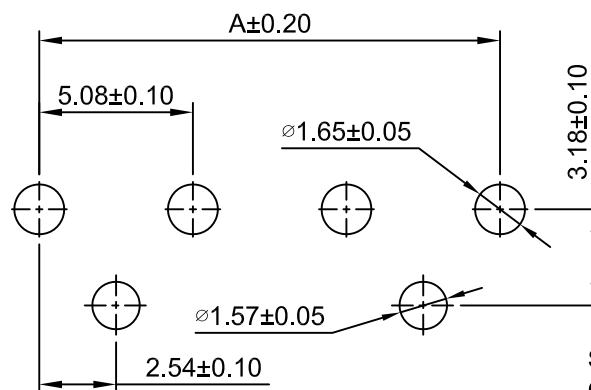
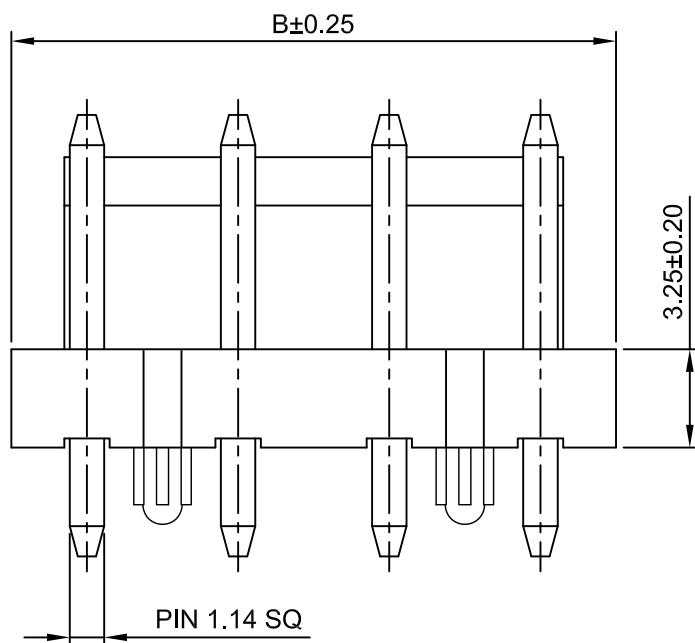


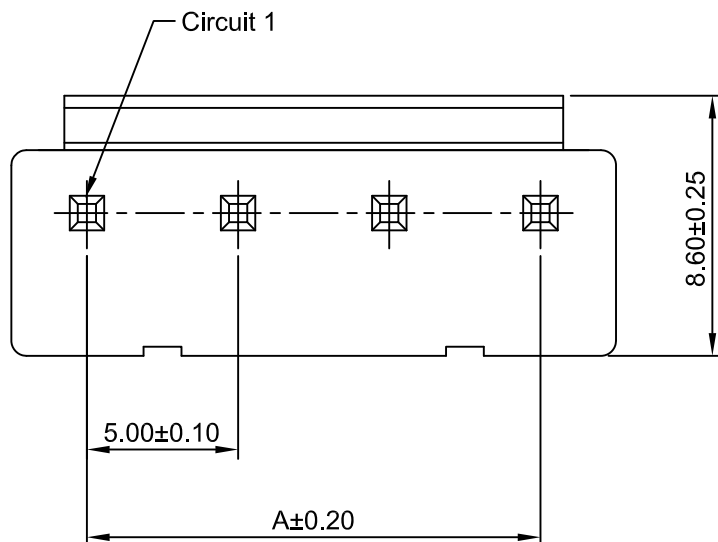

P.C.B LAYOUT

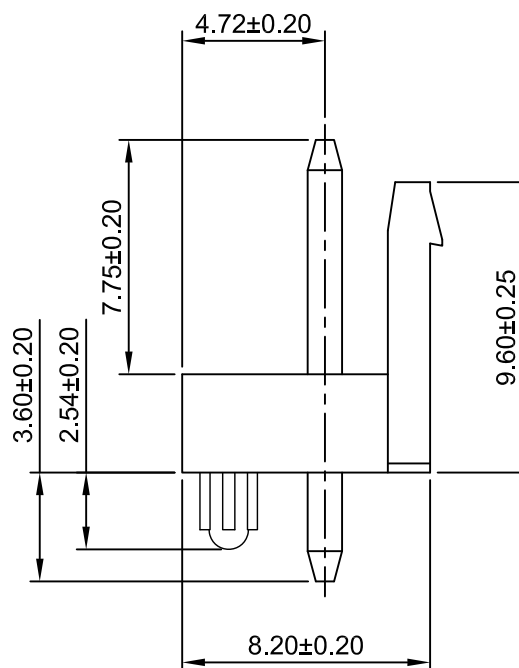

Ordering Information:
A5001WVA-F-XP - ***
1 2

1.Part No.
2.Material:
(blank):Nylon 66, UL94V-0
GWT:Nylon 66, UL94V-0,GWT 750°C

SPECIFICATIONS:

Current Rating: 10A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material:Nylon 66, UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	5.00	10.00	10P	45.00	50.00
3P	10.00	15.00	11P	50.00	55.00
4P	15.00	20.00	12P	55.00	60.00
5P	20.00	25.00	13P	60.00	65.00
6P	25.00	30.00	14P	65.00	70.00
7P	30.00	35.00	15P	70.00	75.00
8P	35.00	40.00	16P	75.00	80.00
9P	40.00	45.00			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1

Draw By:	Approved :
Diankui Wan	Jack Yin

General Tolerance

A1	CHANGE THE CURRENT	2020.04.02	x.x±0.25	PROJECT
A0	NEW RELEASE	2018.09.28	x.xx±0.20	
REV	DESCRIPTION	DATE	x.xxx±0.15	

Title :		5.00mm PITCH 180° SINGEL ROW PIN HEADER	
DRAW NO :		A5001WVA-F-XP	REV A0