
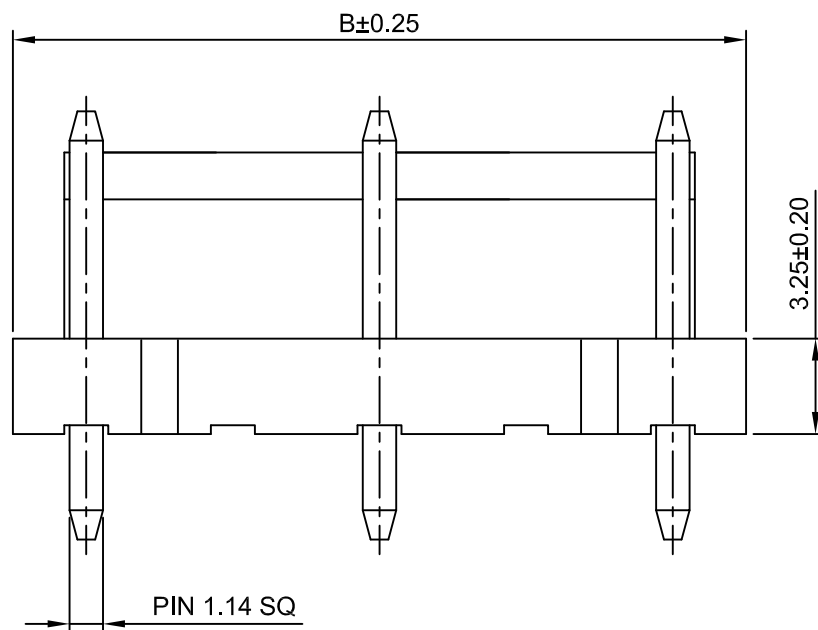
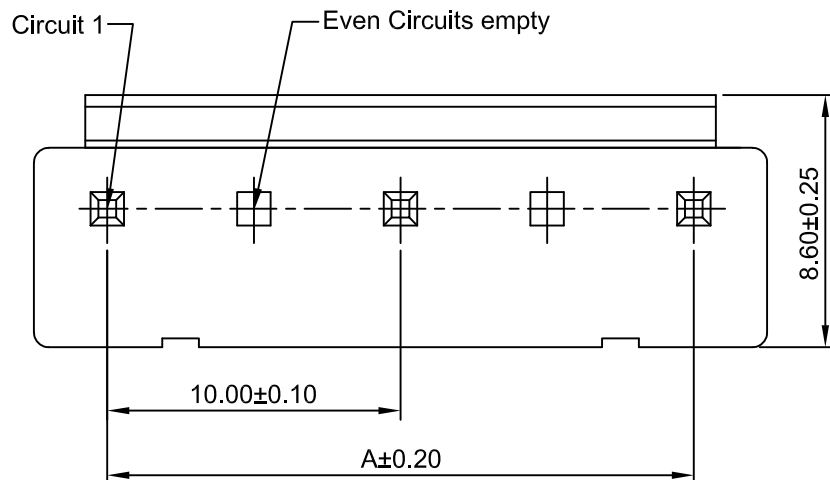


P.C.B LAYOUT
TOLERANCE:±0.05

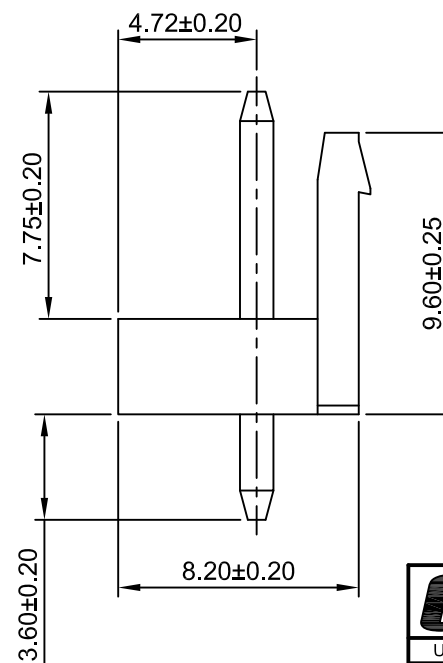

Ordering Information:

A5001WVA-XP-A - *** - ***
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

(Blank): White

BK: Black BL: Blue

RD: Red GN: Green

YL: Yellow

SPECIFICATIONS:

Current Rating: 10A AC,DC (Max.)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin Over Nickel

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A5001WVA-3P	10.00	15.00
A5001WVA-5P	20.00	25.00
A5001WVA-7P	30.00	35.00
A5001WVA-9P	40.00	45.00
A5001WVA-11P	50.00	55.00
A5001WVA-13P	60.00	65.00
A5001WVA-15P	70.00	75.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1		
DRWN	CHK'D	APPR	10.00mm PITCH VERTICAL SINGLE ROW PIN HEADER	
Xu Lei	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A1
x,x±0.25 x,x±0.20 x,x,x±0.15 ANGLES ±1°				
			A5001WVA-XP-A	