

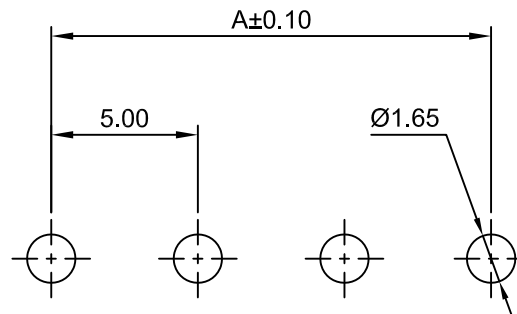
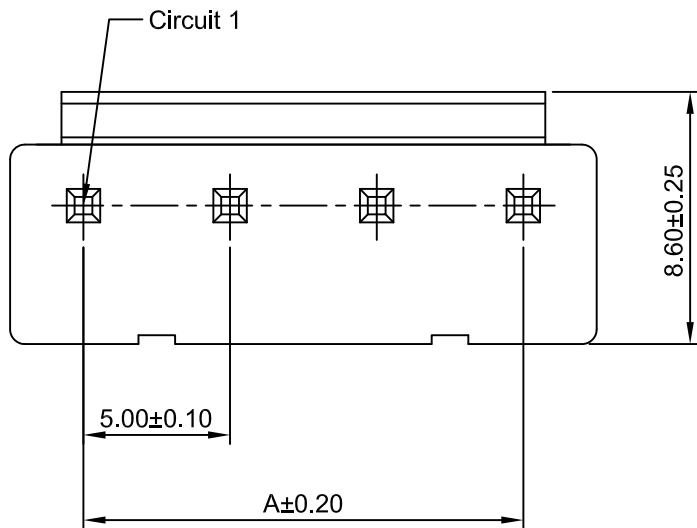


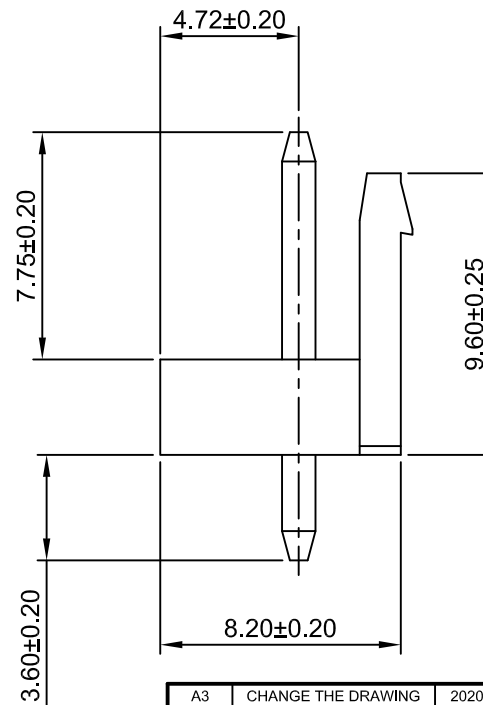

P.C.B LAYOUT
TOLERANCE:±0.05

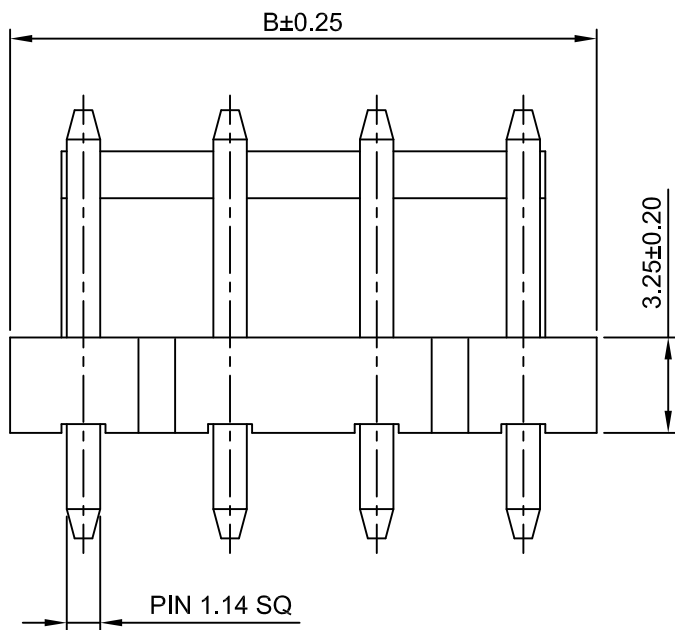

Ordering Information:

A5001WVA-XP - *** - ***
1 2 3

- Part NO.
- Material:
(Blank): Nylon 66,UL94V-0(White)
GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.
- Color:
(Blank): White
BK: Black BL: Blue
RD: Red GN: Green
YL: Yellow

SPECIFICATIONS:

Current Rating: 10A AC,DC (Max.)
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin Over Nickel

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A5001WVA-2P	5.00	10.00
A5001WVA-3P	10.00	15.00
A5001WVA-4P	15.00	20.00
A5001WVA-5P	20.00	25.00
A5001WVA-6P	25.00	30.00
A5001WVA-7P	30.00	35.00
A5001WVA-8P	35.00	40.00
A5001WVA-9P	40.00	45.00
A5001WVA-10P	45.00	50.00
A5001WVA-11P	50.00	55.00
A5001WVA-12P	55.00	60.00
A5001WVA-13P	60.00	65.00
A5001WVA-14P	65.00	70.00
A5001WVA-15P	70.00	75.00
A5001WVA-16P	75.00	80.00

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE
mm	4:1	1 of 1	5.00mm PITCH 180° SINGLE ROW PIN HEADER
DRWN	CHKD	APPR	
Dengchun Yi	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			REV
REV		DESCRIPTION	DATE

A5001WVA-XP

A3