


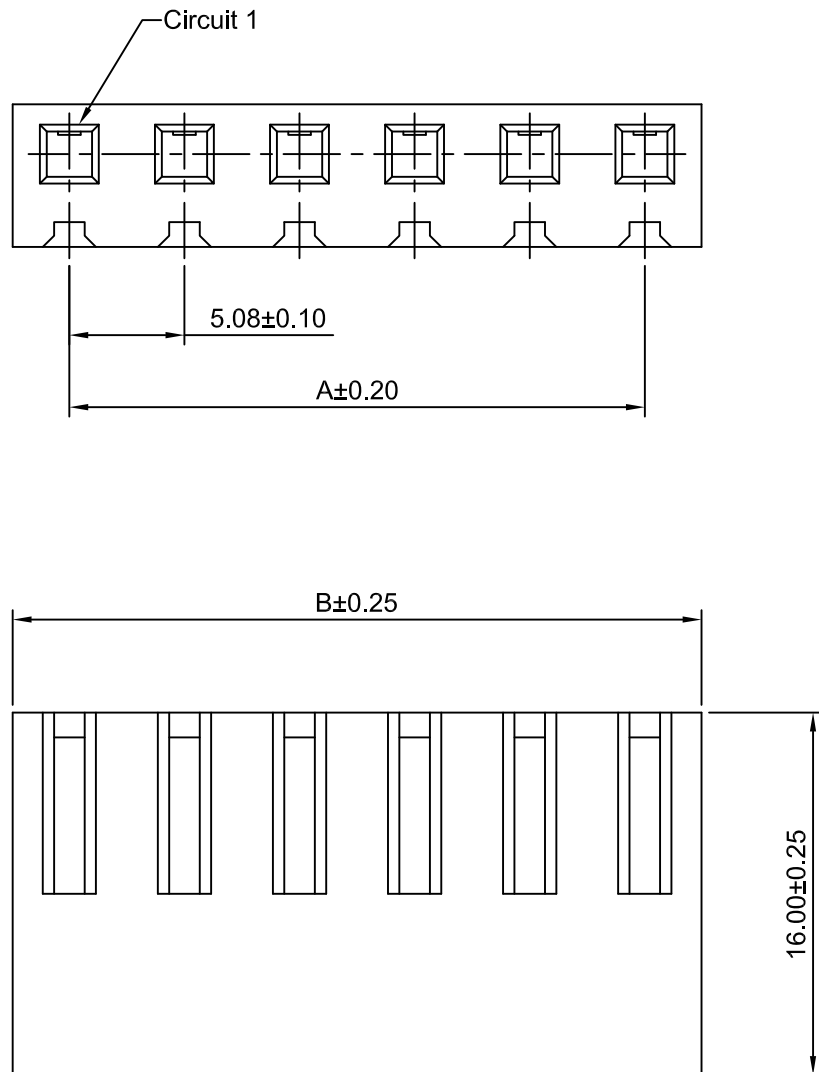

Ordering Information:

A5081H-XP-2 - ***
1 2

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-2(Natural)

GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	5.08	10.08	12P	55.88	60.88
3P	10.16	15.16	13P	60.96	65.96
4P	15.24	20.24	14P	66.04	70.04
5P	20.32	25.32	15P	71.12	76.12
6P	25.40	30.40	16P	76.20	81.20
7P	30.48	35.48	17P	81.28	86.28
8P	35.56	40.56	18P	86.36	91.36
9P	40.64	45.64	19P	91.44	96.44
10P	45.72	50.72	20P	96.52	101.52
11P	50.80	55.80			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 5.08mm PITCH HOUSING	
mm		3:1		1 of 1			
DRAWN		CHK'D		APPR			
Haisen Li		Diankui Wan		Jack Yin		DRAWING NO. A5081H-XP-2	
General Tolerances				THIRD ANGLE PROJECTION			
5 0 x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°							
						REV A1	

REV	DESCRIPTION	DATE
A1	CHANGE THE DRAWING	2022.08.05
A0	NEW RELEASE	2005.05.10