


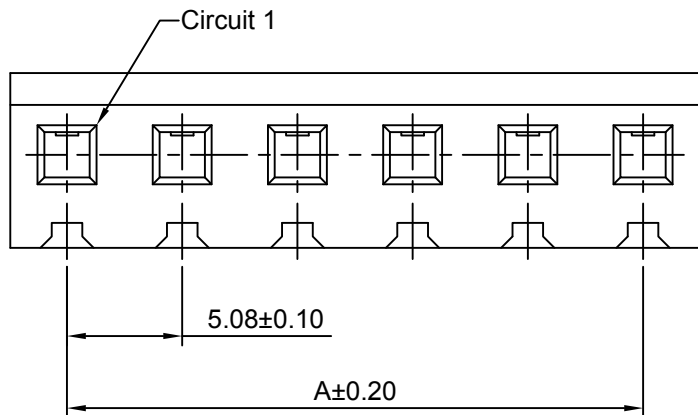

Ordering Information:

A5081H-XP - **
1 2

1.Part No.

2.Style:

(blank)-Type 1

2-Type 2

3:Color:

(blank):Natural


BK:Black

RD :Red

BL:Blue

YL:Yellow

GN:Green

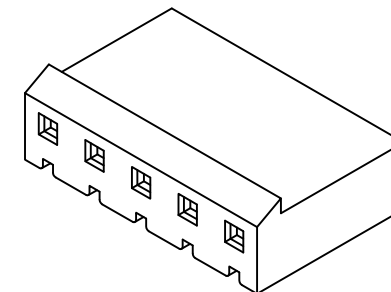

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min



Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	5.08	10.08	12P	55.88	60.88
3P	10.16	15.16	13P	60.96	65.96
4P	15.24	20.24	14P	66.04	70.04
5P	20.32	25.32	15P	71.12	76.12
6P	25.40	30.40	16P	76.20	81.20
7P	30.48	35.48	17P	81.28	86.28
8P	35.56	40.56	18P	86.36	91.36
9P	40.64	45.64	19P	91.44	96.44
10P	45.72	50.72	20P	96.52	101.52
11P	50.80	55.80			

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	Title :	
mm	3:1	1 of 1		
Draw BY:		Approved :		5.08mm PITCH
LIZQ		GONGYB		
General Tolerance		ANGLE±		
x.x≤0.25 x.xx≤0.20 x.xxx≤0.15				DRAW NO : A5081H-XP
				REV A0

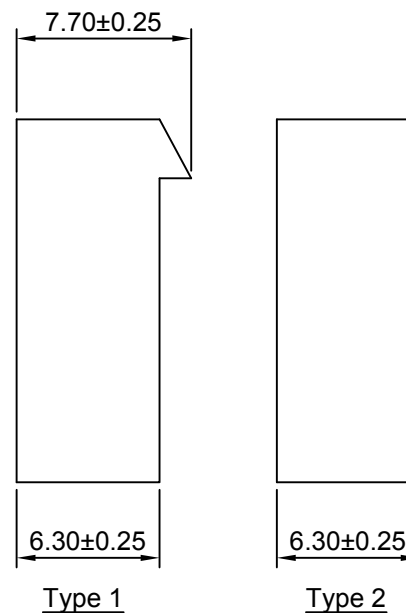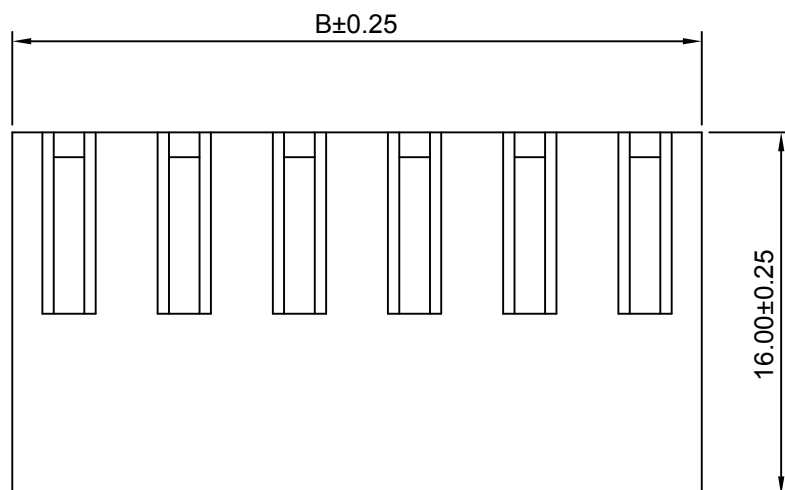

A0	NEW RELEEASE	2005.05.10
REV	DESCRIPTION	DATE